

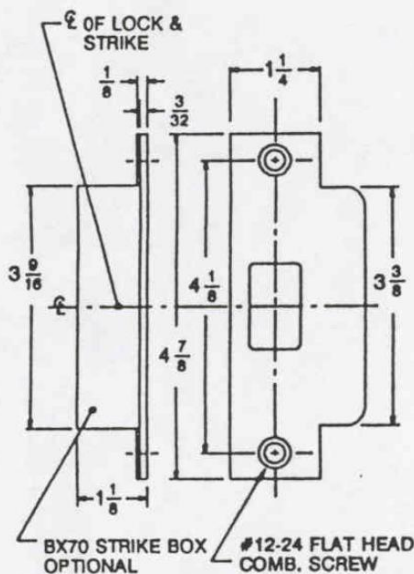



DOOR FRAME MANUFACTURER'S SHOULD PROVIDE THE REQUIRED CLEARANCE TO ALLOW BOLT TO ENTER STRIKE WHEN GASKETING OR SILENCERS ARE USED.




347 STRIKE

#8 COMBINATION SCREWS (2)

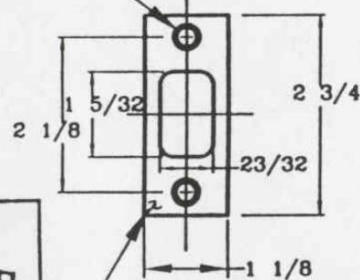


346 STRIKE
(FOR METAL JAMB)
APPLICATION

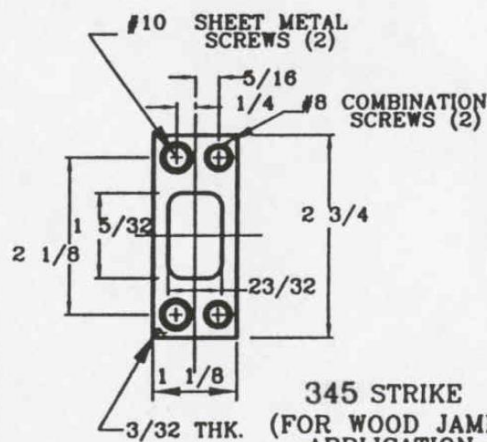


345 STRIKE
(FOR WOOD JAMB)
APPLICATION





DESCRIPTION	DIM'S	D & E SERIES
BACKSET	A	2 3/4" OR 2 3/4"
WIDTH OF THE LATCH FRONT	B	1" OR 1 1/8"

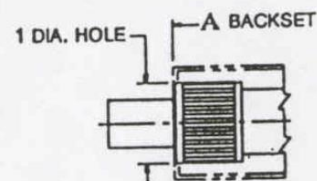

DRIVE-IN DEADBOLT
SHOWN



STRAIGHT FRONT
SHOWN

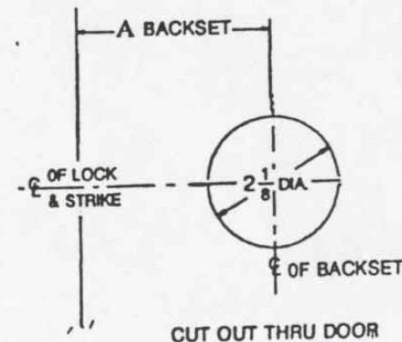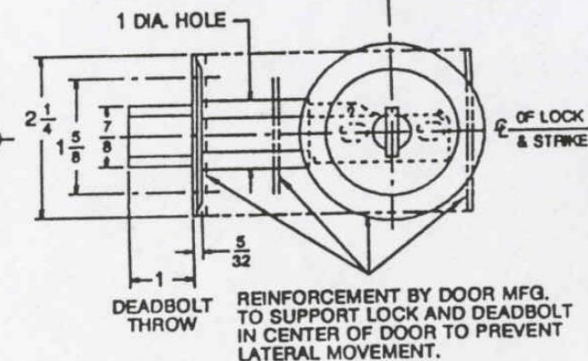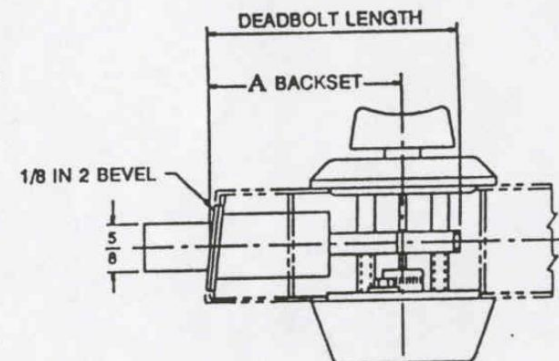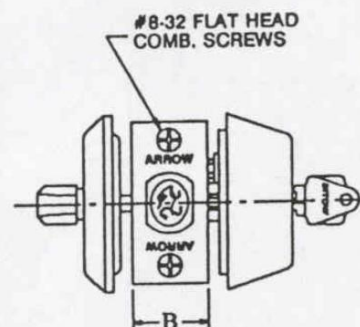

CUT OUT THRU DOOR

REV & DATE
C 04-14

DO NOT SCALE

TEMPLATE NO.
1125 B.

ARROW TEMPLATE

PRODUCT

D & E SERIES LOCK