


BFDN: Non-Drainable

Babcock-Davis non-drainable doors are economical and easy to install. These doors are primarily for interior use in new openings, when concrete will be pour-in-place.

Specifications

- Load:
 - Pedestrian 300psf live load
 - H20 wheel load, infrequent, off street
- Material:
 - Aluminum $\frac{1}{4}$ ", Mill finish with epoxy on exterior frame
- Frame: Angle frame
 - Anchor Straps, $\frac{1}{4}$ " x 1" x 4" welded for concrete pour
- Cover: Diamond tread plate
- Spring: Coil Type 17-7 SST enclosed in Type 316 SST telescopic tubes
- Hinges: Heavy duty Type 316 SST
- Hold Open Arm: Type 316 SST automatic hold open arm locks cover in open position
- Latch: Slam latch Type 316 SST with inside lever handle, includes removable 5/16" steel square "L" handle and threaded plug

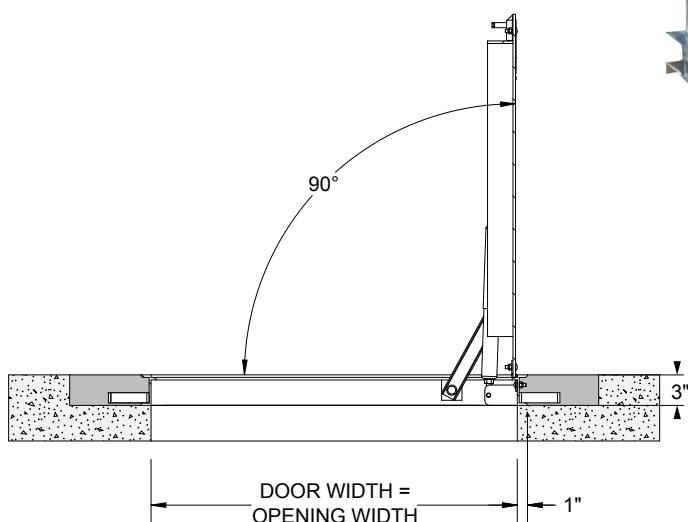

PRODUCT GUIDE

BFD

N

LOAD

MATERIAL

WIDTH

LENGTH

COVER

INSTALL

L

SERIES
D DRAINABLE
N NON-DRAINABLE
E EXISTING OPENING
R RECESSED
W WATER TIGHT

LOAD
P 300 PSF PEDESTRIAN
H H20 VEHICULAR

MATERIAL
A $\frac{1}{4}$ " ALUMINUM
P $\frac{3}{16}$ " STEEL PRIMED
S $\frac{3}{16}$ " TYPE 304 SST
T $\frac{3}{16}$ " TYPE 316 SST

SIZE (WIDTH & LENGTH)	
SINGLE DOOR	DOUBLE DOOR
24" x 24"	48" x 48"
30" x 36"	48" x 72"
36" x 36"	60" x 60"
42" x 42"	

COVER
S SINGLE DOOR
D DOUBLE DOOR

Standard sizes listed,
other sizes available