

Futura Smove 7555 - Concealed runner

Futura Smove 7555 - Corredera invisible



FULL EXTENSION RUNNER FIXED TO THE DRAWER FRONT BY CLIP

SMOVE: FULLY INTEGRATED IN THE RUNNER, DECELERATES THE CLOSING ACTION OF THE DRAWER.

Product features: ANSI - Grade 1

- Dynamic load capacity N 294 (75 lbs)/100 lbs static.
- With Smove decelerated closing.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment (+ 3 mm).
- Finish: bright zinc-plated.

CORREDERA DE EXTRACCIÓN TOTAL CON ENGANCHE DEL CAJÓN MEDIANTE CLIP


SMOVE: SISTEMA DECELERANTE, INTEGRADO EN LA CORREDERA, QUE AMORTIGUA EL CIERRE DEL CAJÓN.

Características del producto: ANSI - Nivel 1

- Capacidad dinámica: N 294 (Kg 30 = 75 lbs).
- Dispositivo de cierre amortiguado Smove.
- Sistema antivuelco del cajón.
- Regulación vertical del cajón (+ 3 mm).
- Acabado: zincado plateado.

Dimensions

Medidas del espacio ocupado

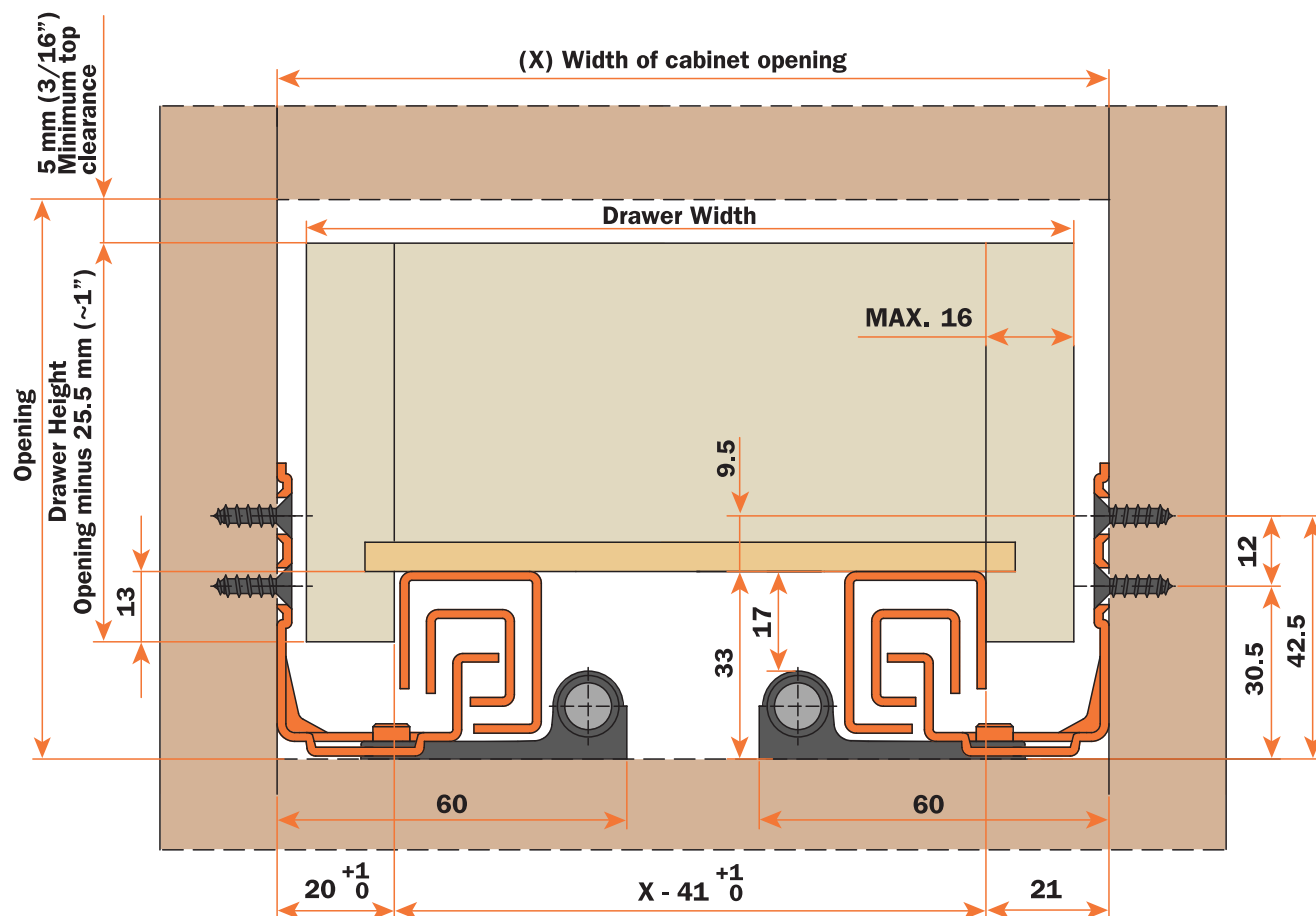

CALCULATION FORMULA FOR OUTSIDE DRAWER WIDTH FÓRMULA DE CÁLCULO PARA ANCHO EXTERNO CAJÓN

For drawer side thickness of <i>Para espesor lateral del cajón de</i>	16 mm (5/8")	15 mm (19/32")	14 mm (9/16")	13 mm (1/2")	12 mm (15/32")
Deduct from inside cabinet width <i>Deducir del ancho interno del mueble</i>	9 mm (3/8")	11 mm (7/16")	13 mm (1/2")	15 mm (5/8")	17 mm (21/32")

Example: For a 15" inside cabinet width and a 5/8" thick drawer, subtract 3/8" from the inside width of 15" = 14-5/8" drawer width.
Ejemplo: Para un cajón con ancho interno de 15" y espesor de 5/8", quitar 3/8" del ancho interno de 15" = 14-5/8" ancho cajón.