




Eurolinx

12VDC LINEAR LIGHTING




216 Lumens
per ft.
(708 per meter)


The Eurolinx's flat profile blends in with any application. Using specialized diffuser and reflector technology to achieve Luniform output, this European style light is a perfect choice for all contemporary and high-end commercial applications. Use the magnets within the U-Clips for metal shelving or office furniture mounting. At 4W per foot and over 200 lumens, Eurolinx is a top pick for high illumination.

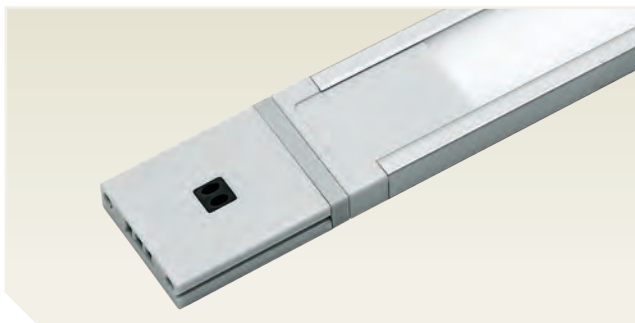

► Optional inline gradual dimmer

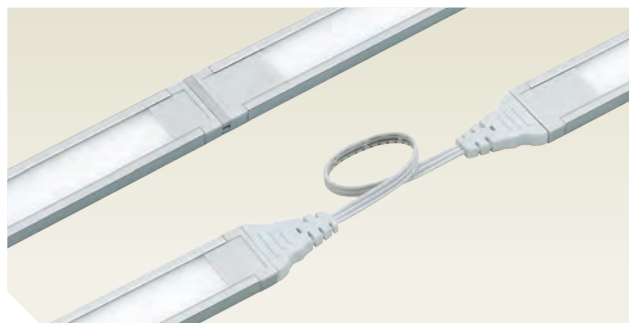

► Linkable (back-to-back or link cord)
up to 10' (3 m) continuous run

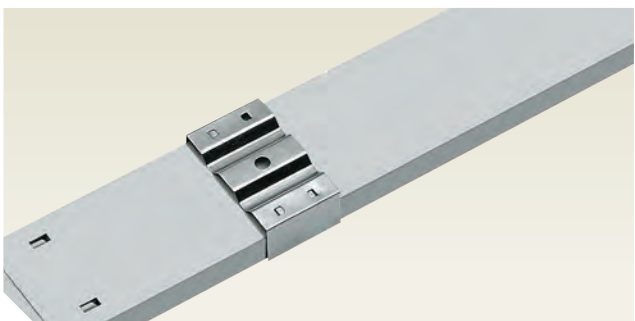

► Mounting clips included. Mounting clips with integrated magnets sold separately



► Sleek, contemporary European design

Features:



- 2 beam spreads based on orientation
- Dimmable
- Luniform Technology – no visible diodes on surface of fixture
- Available in 5 lengths
- Commercial grade 3-year warranty

Typical Applications:

- Cabinets or shelving
- Countertops
- Showcases


Available Finishes:




Aluminum (AL)

Two Beam Spreads:

Powered Left Side



Powered Right Side



**Dimensions:**


Actual Size

Front1-3/16"
(30 mm)5/16"
(8 mm)


7-3/4"
(197 mm)
10-3/4"
(273 mm)
19-3/4"
(502 mm)
31-3/4"
(806 mm)
43-3/4"
(1111 mm)

Specifications:

Wattage	4W/ft. (13.1 W/m)
Lumens	216 per ft. (708 per m)
Efficacy (lm/W)	54
Input Voltage	12VDC
Diode Life	30,000 Hours
Max Per 60W Power Supply	15' (4.6 m)
Max Continuous Run	10' (3 m)
Mounting	Surface
Warranty	3 Year
Certifications	

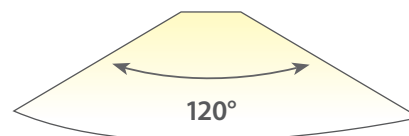Beam Angle**Photometric Data**


	Height	Light Output	Beam Area
	1ft (.3 m)	266.60Fc (2870lx)	2.9ft L x 3.3ft W (.88 m L x 1 m W)
	3ft (.9 m)	29.62Fc (318.8lx)	8.8ft L x 10ft W (2.7 m L x 3 m W)
	6ft (1.8 m)	7.40Fc (79.6lx)	17.6ft L x 20ft W (5.4 m L x 6 m W)
L-EUL15W-1111C Tested			

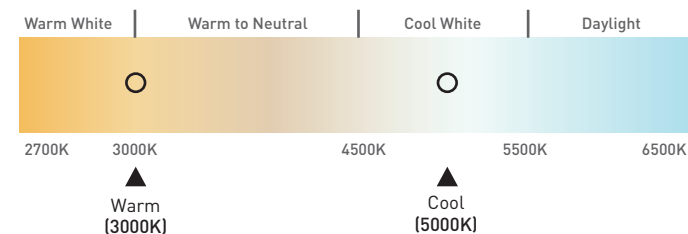Color Temperature

IES data verified by Intertek testing lab.

Required Items

Eurolinx Series

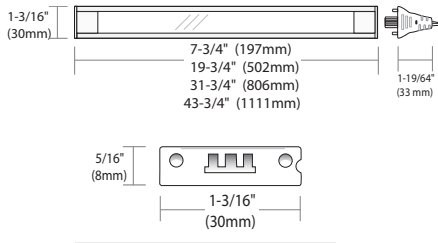

Part #	Description
L-EUL3W-197WAL-1	7.75" (197 mm) 12VDC 3W Eurolinx 3000K
L-EUL4W-273WAL-1	10.75" (273 mm) 12VDC 4W Eurolinx 3000K
L-EUL7W-502WAL-1	19.75" (502 mm) 12VDC 7W Eurolinx 3000K
L-EUL11W-806WAL-1	31.75" (806 mm) 12VDC 11W Eurolinx 3000K
L-EUL15W-1111WAL-1	43.75" (1111 mm) 12VDC 15W Eurolinx 3000K
L-EUL3W-197CAL-1	7.75" (197 mm) 12VDC 3W Eurolinx 5000K
L-EUL4W-273CAL-1	10.75" (273 mm) 12VDC 4W Eurolinx 5000K
L-EUL7W-502CAL-1	19.75" (502 mm) 12VDC 7W Eurolinx 5000K
L-EUL11W-806CAL-1	31.75" (806 mm) 12VDC 11W Eurolinx 5000K
L-EUL15W-1111CAL-1	43.75" (1111 mm) 12VDC 15W Eurolinx 5000K

30,000 useful life hours

Maximum continuous run 10 ft. (3 m) to prevent voltage drop. Maximum 15 ft. (4.6 m) per 60W power supply.
Each light includes 79" (2 m) cord, U-Clips, back to back connector.

Power Supplies




For details see Power Supplies on Page 135.


Eurolinx works with all Tresco 12VDC power supplies.

Optional Items


Euro Link Cord



Part #	Description
L-EULNK-15-WH-1	6" (15 cm) Eurolinx linking cord, white
L-EULNK-25-WH-1	10" (25 cm) Eurolinx linking cord, white
L-EULNK-60-WH-1	24" (60 cm) Eurolinx linking cord, white
L-EULNK-120-WH-1	48" (120 cm) Eurolinx linking cord, white
L-EULNK-180-WH-1	72" (180 cm) Eurolinx linking cord, white




Eurolinx Touch Dimmer

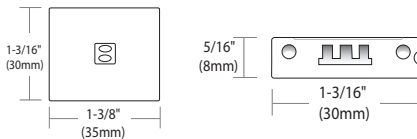

Part #	Description
L-EUL-GTD-1	27W Eurolinx gradual inline touch dimmer


Controls up to 6 feet (1.8 m) of Eurolinx Lights.
Max load 27W.

Eurolinx U-Clips



Part #	Description
L-EUL-UCLP-1	Eurolinx U-Clip with integrated magnets pack (2-clips)

Eurolinx Back-to-Back Link



Part #	Description
L-EULNK-BTB-GY-1	Eurolinx Back-to-Back Link, Gray

Included with each light.

12V COMPONENTS: POWER SUPPLIES, CONTROLLERS & MORE SEE PAGE 135.