



# EquiLine Tape LED

12VDC FLEXIBLE LIGHTING

The low profile and flexibility of our EquiLine Tape LED make it the perfect light for displays, signs and perimeter lighting. Our economical LED tape is sold by the roll and has adhesive backing for effortless installation.



► Easy-to-use connectors (No soldering!)



► Sold by the roll



► Standard 200MP 3M™ adhesive backing

### Features:

- Avg. rated life: 25,000 hours\*
- Available in multiple color temperatures
- Dimmable




### Typical Applications:


- Store fixtures
- Edge lighting
- Back lighting
- Accent lighting
- Cove lighting
- Toe kick
- Soffit

\*When adhered to a metal substrate

**Dimensions:**


Actual Size

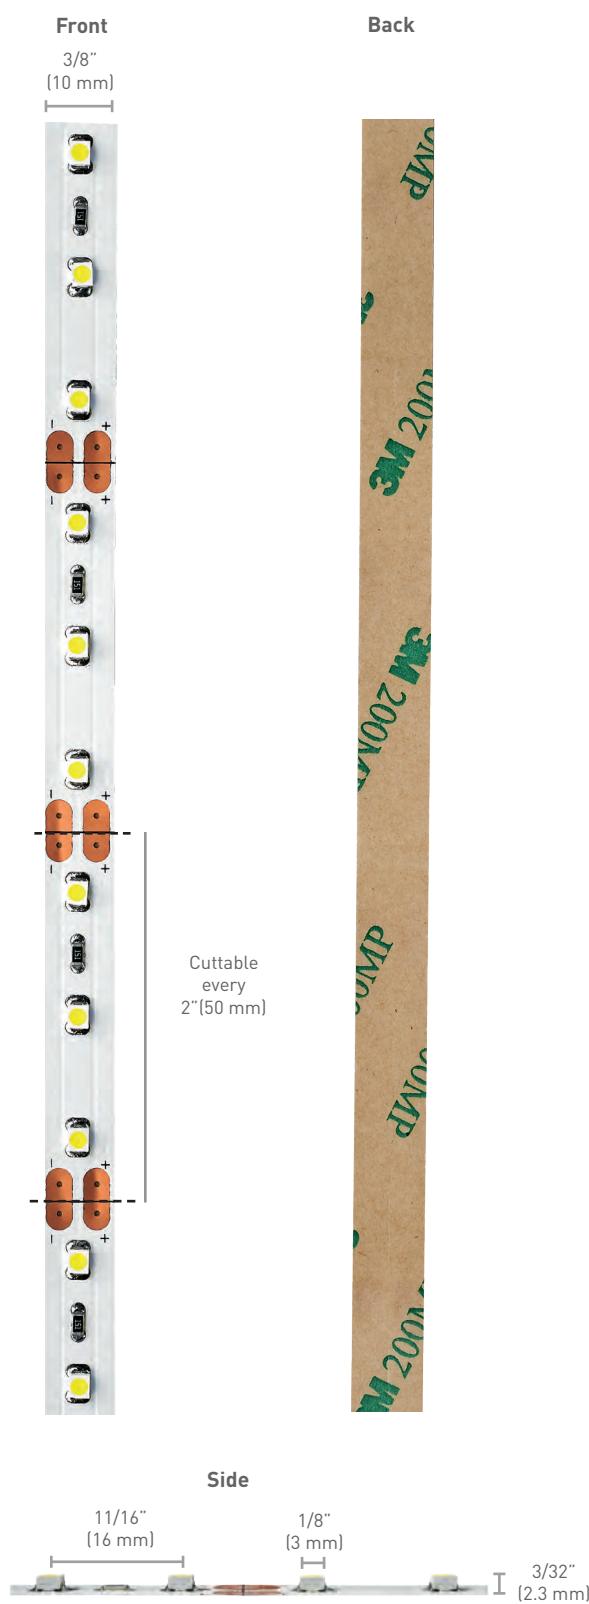**Specifications:**

Wattage	1.5W/ft. (4.9W /m)
Input Voltage	12VDC
Diode Life	25,000 Hour
Max Per 60W Power Supply	40' (12 m)
Max Continuous Run	20' (6 m)
Mounting	Surface
Warranty	1 Year
Certifications	
<b>Color Temperature</b>	
Warm White      Warm to Neutral      Cool White      Daylight	
	
2700K      3000K      4500K      5500K      6500K	
Warm (2700K)      Neutral (3500K)      Cool (4800K)      Daylight (6500K)	

## Dimensions:

Actual Size

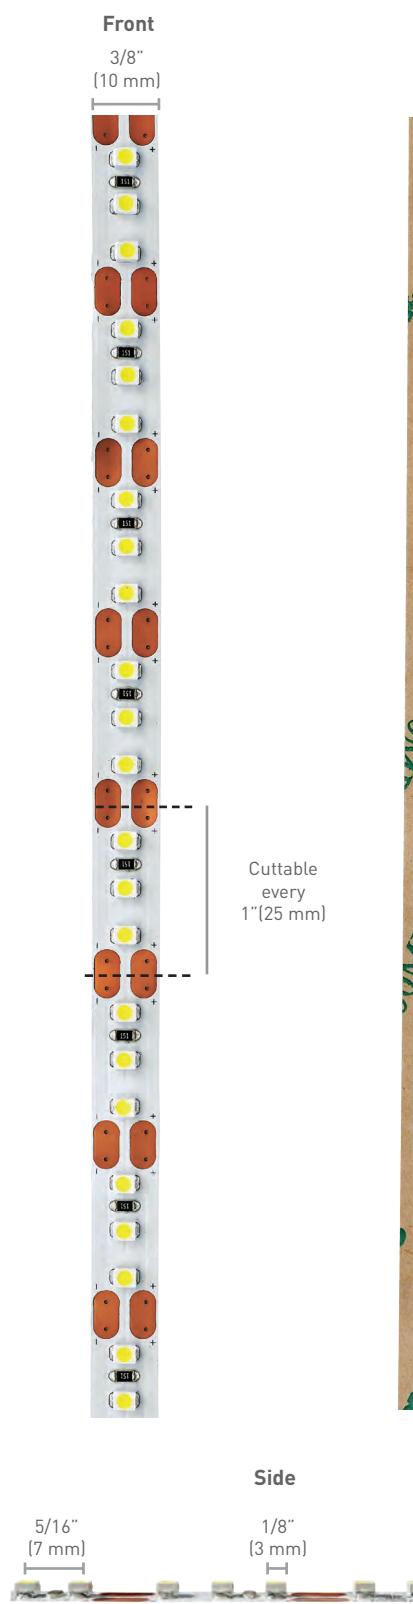


## Specifications:

Wattage	3W/ft. (9.8 W/m)		
Input Voltage	12VDC		
Diode Life	25,000 Hours		
Max Per 60W Power Supply	20' (6 m)		
Max Continuous Run	16.4' (5 m)		
Mounting	Surface		
Warranty	1 Year		
Certifications			
Color Temperature			
Warm White	Warm to Neutral	Cool White	Daylight
2700K Warm (2700K)	3000K Neutral (3500K)	4500K Cool (4800K)	5500K Daylight (6500K)

NEW!

## Dimensions:

Actual Size



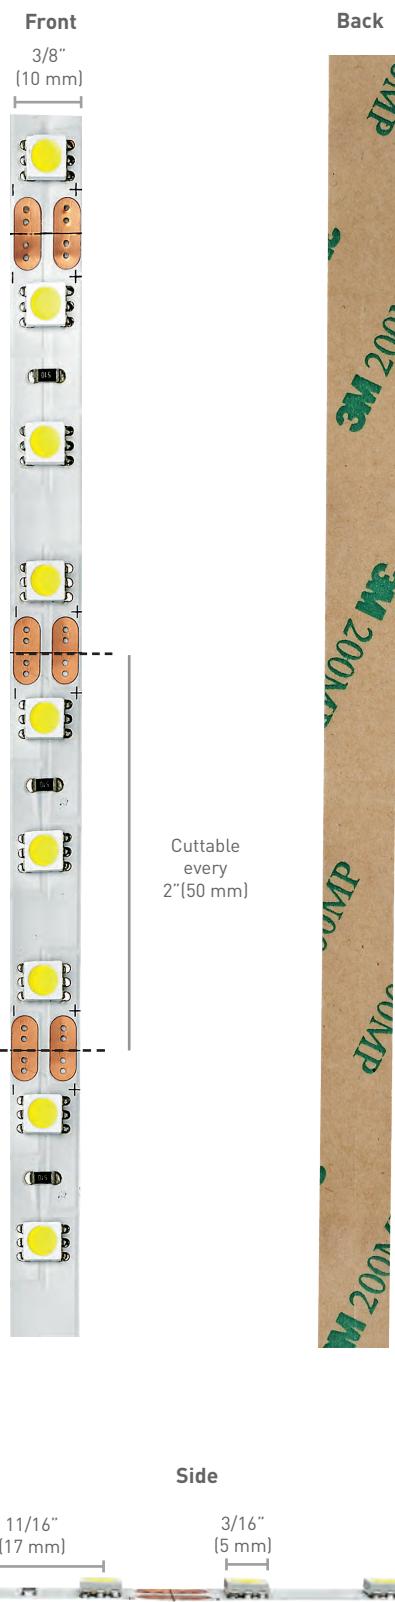


## Specifications:

Wattage	4.4W/ft. (14.4W/m)
Input Voltage	12VDC
Diode Life	25,000 Hours
Max Per 60W Power Supply	13' (3.96 m)
Max Continuous Run	13' (3.96 m)
Mounting	Surface
Warranty	1 Year
Certifications	
Color Temperature	
Warm White	
Warm to Neutral	
Cool White	
Daylight	
2700K	3000K
Warm (2700K)	Neutral (3500K)
4500K	5500K
Cool (4800K)	Daylight (6500K)

## Required Items



## Equiline Tape LED 1.5W

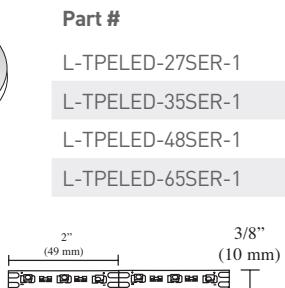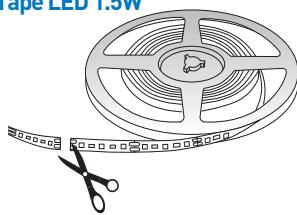

Part #	Description
L-TPELED-27SER-1	Equiline 20' (6 m) Roll Tape LED 2700K
L-TPELED-35SER-1	Equiline 20' (6 m) Roll Tape LED 3500K
L-TPELED-48SER-1	Equiline 20' (6 m) Roll Tape LED 4800K
L-TPELED-65SER-1	Equiline 20' (6 m) Roll Tape LED 6500K

Maximum continuous run is 20' (6 m). Maximum per power supply is 40' (12 m). Mounts with adhesive backing. Cuttable every 2" (49 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.




## Equiline Tape LED 3W

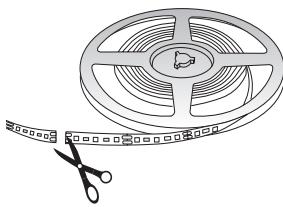

Part #	Description
L-TPELED-27HER-1	Equiline 16.4' (5 m) Roll Tape LED 2700K
L-TPELED-35HER-1	Equiline 16.4' (5 m) Roll Tape LED 3500K
L-TPELED-48HER-1	Equiline 16.4' (5 m) Roll Tape LED 4800K
L-TPELED-65HER-1	Equiline 16.4' (5 m) Roll Tape LED 6500K

Maximum continuous run is 16.4' (5 m). Maximum per power supply is 20' (6 m). Mounts with adhesive backing. Cuttable every 1" (25 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.

## Equiline Tape LED 4.4W

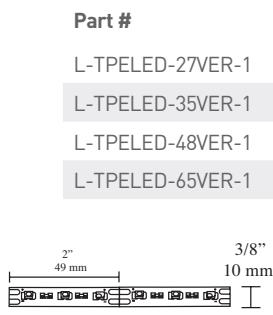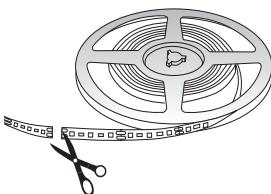

Part #	Description
L-TPELED-27VER-1	Equiline 13' (3.96 m) Roll Tape LED 2700K
L-TPELED-35VER-1	Equiline 13' (3.96 m) Roll Tape LED 3500K
L-TPELED-48VER-1	Equiline 13' (3.96 m) Roll Tape LED 4800K
L-TPELED-65VER-1	Equiline 13' (3.96 m) Roll Tape LED 6500K

Maximum continuous run is 13' (3.96 m). Maximum per power supply is 13' (3.96 m). Mounts with adhesive backing. Cuttable every 2" (50 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.

## Power Supplies



Part #	Description
L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

\* Dimmable on trailing edge (12V side). Mounting block and power cord are included.

FOR STARTER CORDS AND CONNECTORS SEE PAGE 100

12V COMPONENTS: POWER SUPPLIES, CONTROLLERS & MORE SEE PAGE 135.