



NOW
BRIGHTER

FineLine


12VDC LINEAR LIGHTING



297 Lumens
per ft.
(971 per meter)




Long and narrow, FineLine is the unobtrusive way to provide smooth, linear lighting almost anywhere. The low profile design features a frosted diffuser for even illumination and with optional manual or remote control dimmers, creating the perfect atmosphere is effortless.

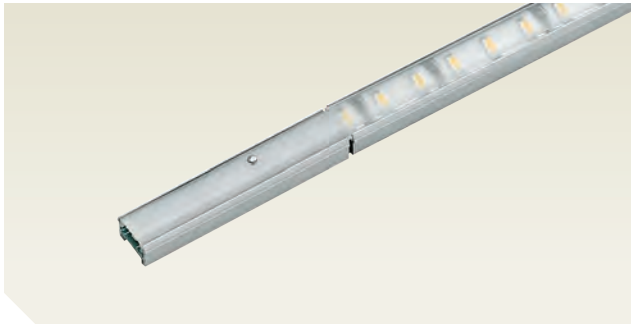

- ▶ Optional in-line touch dimmer available (4-step: low-medium-high-off)



- ▶ Linkable (back-to-back or link cord) up to 12' (3.66 m) continuous run

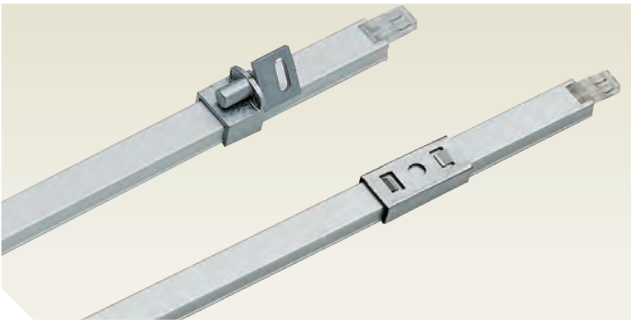

- ▶ Straight & adjustable mounting U-Clips included



- ▶ 79" (2 m) starter cord included

Features:



- ▶ Extremely thin, low-profile design
- ▶ 90° beam spread
- ▶ Frosted diffuser
- ▶ Available in 3 lengths (8", 12", 22")
- ▶ Dimmable

Typical Applications:

- ▶ Shelving
- ▶ Displays or store fixtures
- ▶ Interior and under cabinets

Available Finishes:




Aluminum (AL)



Dimensions:


Actual Size

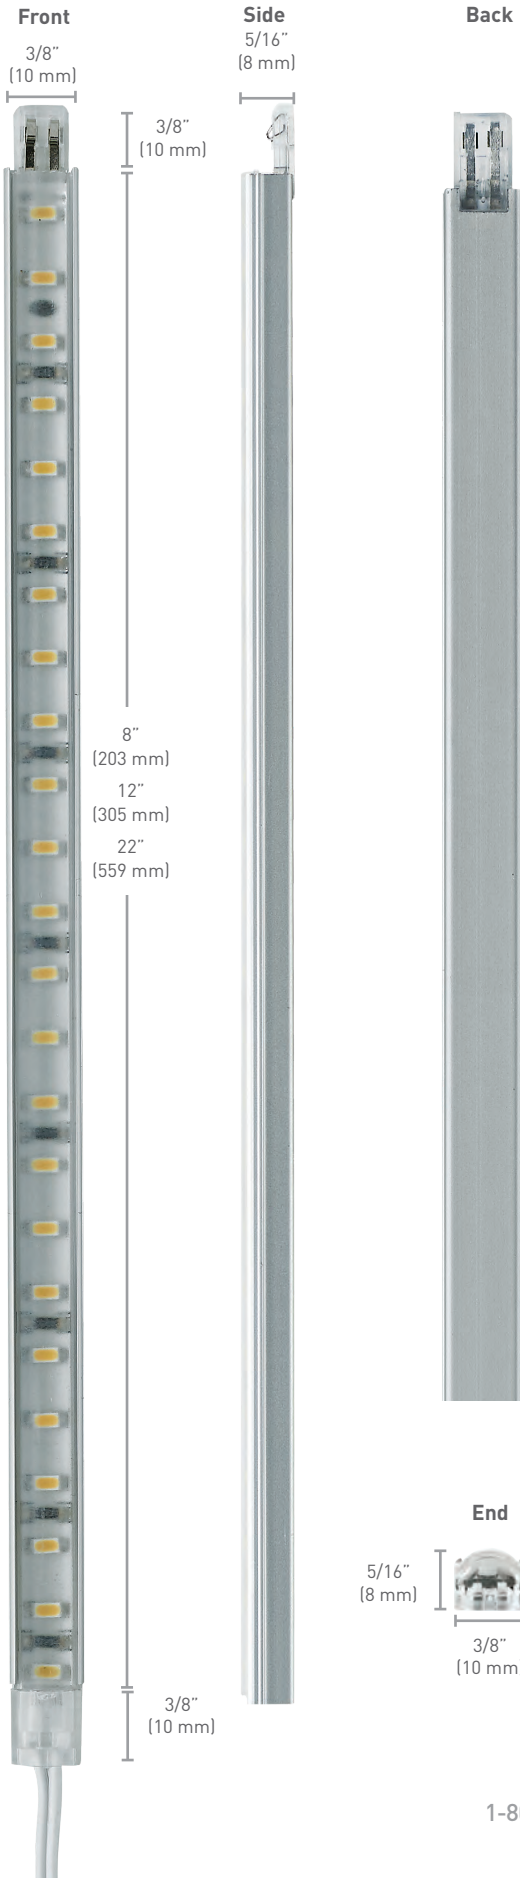

Specifications:

Wattage	2.4W/ft (7.9 W/m)
Lumens	297 per ft. (971 per m)
Efficacy (lm/W)	124
Input Voltage	12VDC
Diode Life	50,000 Hours
Max Per 60W Power Supply	24' (7.32 m)
Max Continuous Run	12' (3.66 m)
Mounting	Surface/Recess
Warranty	3 Years
Certifications	

Beam Angle




Photometric Data

	Height	Light Output	Beam Area
	1ft (.3 m)	284Fc (3056.9lx)	3.2ft L x 1.7ft W (.97 m L x .52 m W)
	3ft (.9 m)	31.5Fc (339.1lx)	6.3ft L x 3.3ft W (1.9 m L x 1 m W)
	6ft (1.8 m)	7.88Fc (84.8lx)	19ft L x 9.9ft W (5.7 m L x 3 m W)

L-LED-STK22-C Tested


Color Temperature

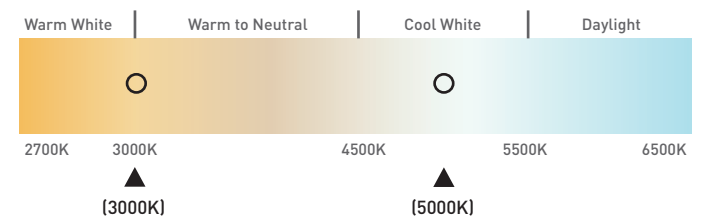

IES data verified by Underwriters Laboratory.

Required Items

FineLine LED Series

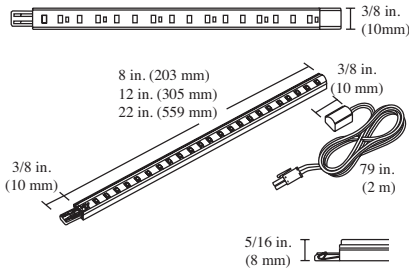

Part #	Description
L-LED-STK8-WNI-1	8" (203 mm) Fineline, 3000K, Nickel
L-LED-STK12-WNI-1	12" (305 mm) Fineline, 3000K, Nickel
L-LED-STK22-WNI-1	22" (559 mm) Fineline, 3000K, Nickel
L-LED-STK8-CNI-1	8" (203 mm) Fineline, 5000K, Nickel
L-LED-STK12-CNI-1	12" (305 mm) Fineline, 5000K, Nickel
L-LED-STK22-CNI-1	22" (559 mm) Fineline, 5000K, Nickel

Maximum continuous run of 12 ft. (3.7 m) to prevent voltage drop. Maximum 24 ft. (7.3 m) per 60W power supply. 79" (2 m) Starter Cord, AMP® Connector and mounting U-Clips are included with each light.

Power Supplies




Part #	Description
L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

* Dimmable on trailing edge (12V side). Mounting block and power cord are included.

Optional Items


FineLine Touch Dimmer



Part #	Description
L-LED-STKDIM-TD4-1	Inline Touch Dimmer, 4 Step


Max Load 27W. Controls up to 11 ft. (3.3 m) of FineLine lights.

FineLine Link Cord



Part #	Description
L-LED-STKLNK-5-1	2" (5 cm) 12VDC Stick Linking Cord
L-LED-STKLNK-15-1	6" (15 cm) 12VDC Stick Linking Cord
L-LED-STKLNK-25-1	10" (25 cm) 12V DC Stick Linking Cord
L-LED-STKLNK-60-1	24" (60 cm) 12V DC Stick Linking Cord
L-LED-STKLNK-120-1	48" (120 cm) 12V DC Stick Linking Cord
L-LED-STKLNK-180-1	72" (180 cm) 12VDC Stick Linking Cord

Adjustable U-Clip Packs



Part #	Description
L-STKAUCLP-NI-1	FineLine Adj U-Clip Pack, NI

12V COMPONENTS: POWER SUPPLIES, CONTROLLERS & MORE SEE [PAGE 135](#).