



Power Pockit® 5W


12VDC PUCK LIGHTING




290 Lumens




The next generation of Power Pockit® is an astounding 2.5X brighter than our original industry leading 3W version. With Luniform technology, 290 lumens of light are evenly distributed and eliminate the “dotted” appearance on surfaces. At only 1/4” (6 mm) depth, the Power Pockit® 5W is the slimmest, highest output puck light on the market.

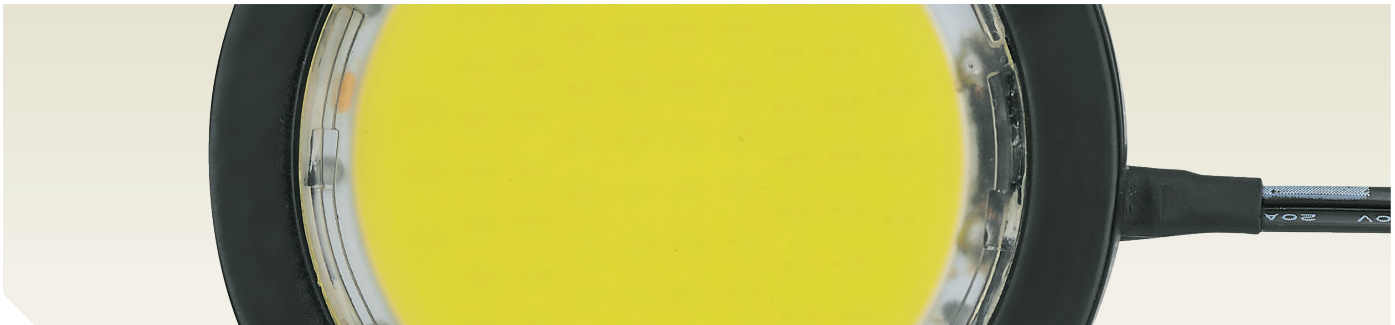

- ▶ Luniform technology provides superior light output and uniform light spread without any “dots”

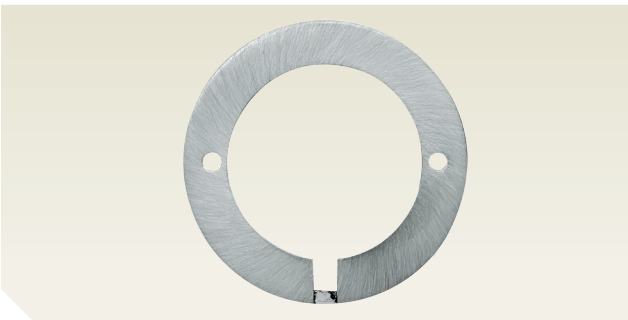

- ▶ Surface mount ring included

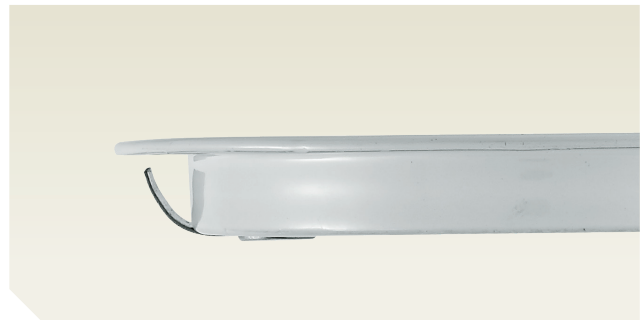

- ▶ Thin profile: Just 1/4” (6 mm) depth when recessing
3/8” (9.5 mm) when surface mounting

Features:




- ▶ Wide 100° beam spread
- ▶ Available in white, black, nickel and oil rubbed bronze
- ▶ High output (290 lumens)
- ▶ Dimmable
- ▶ Luniform technology
- ▶ Commercial grade 3-year warranty

Typical Applications:

- ▶ Displays or store furniture
- ▶ Task or flood lighting
- ▶ Interior cabinets/shelving
- ▶ Under cabinets

Available Finishes:

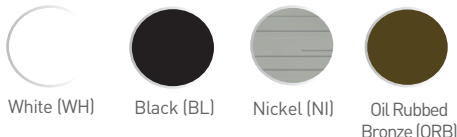


**Dimensions:**

Actual Size


**Specifications:**

Wattage	5W
Lumens	290
Efficacy (lm/W)	58
Input Voltage	12VDC
Diode Life	50,000 Hours
Max Per 60W Power Supply	12 Fixtures
Max Continuous Run	N/A
Mounting	Recess/Surface
Warranty	3 Years
Certifications	

Beam Angle**Photometric Data**

	Height	Light Output	Beam Area
	1ft (.3 m)	115.90Fc (1247.5lx)	2.4ft L x 2.5ft W (.73 m L x .76 m W)
	3ft (.9 m)	12.88Fc (138.6lx)	7.3ft L x 7.4ft W (2.2 m L x 2.3 m W)
	6ft (1.8 m)	3.22Fc (34.7lx)	14.6ft L x 14.8ft W (4.5 m L x 4.5 m W)


POC-5LED-C Tested

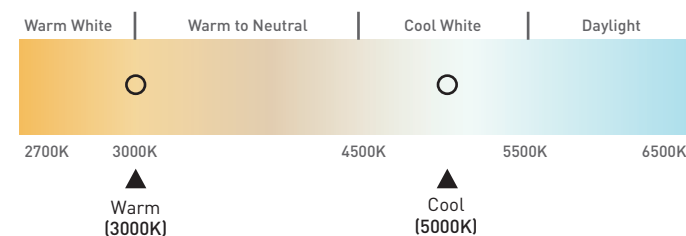Color Temperature

IES data verified by Intertek testing lab.

Required Items

5W Power Pockit®

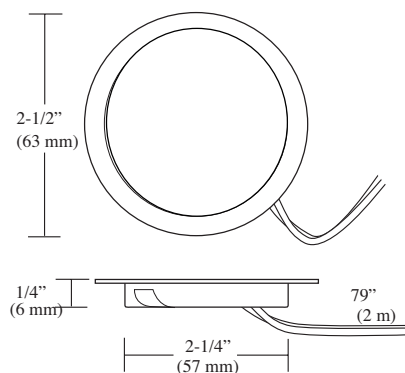

Part

Description

L-POC-5LEDSCL-WORB-1	5W 3000K Oil-Rubbed Bronze LED Pockit® Light
L-POC-5LEDSCL-WNI-1	5W 3000K Nickel LED Pockit® Light
L-POC-5LEDSCL-CNI-1	5W 5000K Nickel LED Pockit® Light
L-POC-5LEDSCL-WBL-1	5W 3000K Black LED Pockit® Light
L-POC-5LEDSCL-CBL-1	5W 5000K Black LED Pockit® Light
L-POC-5LEDSCL-WWH-1	5W 3000K White LED Pockit® Light
L-POC-5LEDSCL-CWH-1	5W 5000K White LED Pockit® Light


50,000 useful hours.

2-1/4" (57 mm) hole required for recessed mounting.

Power Pockit® includes Surface Mount Ring, AMP® Connector, and 79" (2 m) input lead.

All Pockit® lights can be either surface mounted or recess mounted.

Surface Mount Ring

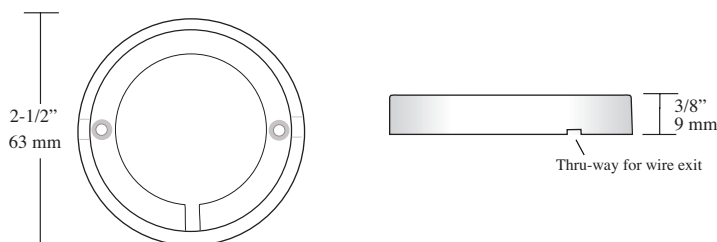

Power Supplies



For details see
Power Supplies on
Page 135.

Part

Description

L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

* Dimmable on trailing edge (12V side). Mounting block and power cord are included.