

MAGIC SWITCH

TOUCHLESS SOLUTIONS MS08 & MS09 SERIES



*10MS08U (above) contains single and double gang, black faceplates with wave to open text
MS08U CUSTOM offers a choice of faceplate styles*

TOUCHLESS TECHNOLOGY ACTIVATION SENSORS

DESCRIPTION

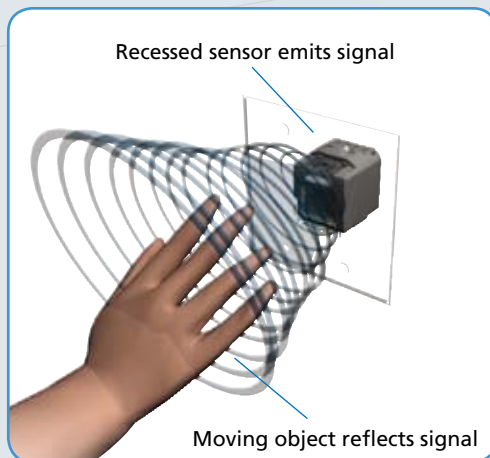
The **MS08 & MS09** utilize microwave technology and the Doppler Radar effect. This Doppler Radar effect emits a signal that, when reflected by a moving object (i.e. a hand, cart, wheelchair, etc.), activates the door. This touchless feature greatly reduces the spread of bacteria commonly found on push plates requiring a physical touch for activation.

The MS09 is a NEMA 4 variant of the MS08.

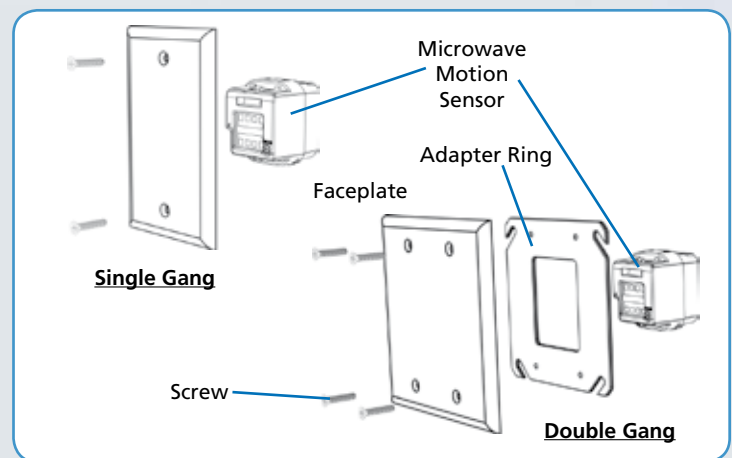
Easy Installation



How It Works





Components View




FEATURES

- Touchless technology is ideal for use in sterile environments (i.e. clean-rooms, healthcare facilities, food processing plants)
- Can be hidden from view by installing the microwave sensor behind non-metallic surfaces (i.e. mounted behind drywall)
- Variable adjustment of detection zone from 4 to 24 inches
- Water-resistant foam gasket provides increased reliability when exposed to water or cleaning products
- Low profile, beveled design reduces accidental damage

PEDESTRIAN
SWING DOOR

HEALTHCARE



DETECTION ZONE



MS09



MS21H SERIES







MS21W SERIES

APPLICATIONS

- Sterile environments (clean-rooms, operating rooms, pharmaceutical, manufacturing, etc.)
- Healthcare facilities (hospitals, assisted living, elder care, etc.)
- Food processing plants (reduces cross-contamination)
- Architectural specific applications (low-profile requirement)

MS08 SERIES

70.5226
Single Gang
Black with Text70.5227
Double Gang
Black with Text70.5272
Single Gang
Solid Black70.5273
Double Gang
Solid Black70.5278
Single Gang
Black with Logo70.5279
Double Gang
Black with Logo70.5268
Single Gang
White with Text70.5269
Double Gang
White with Text70.5274
Single Gang
Solid White70.5275
Double Gang
Solid White70.5270
Single Gang
Cream with Text70.5271
Double Gang
Cream with Text70.5276
Single Gang
Solid Cream70.5277
Double Gang
Solid Cream10BOX24SGSM
Single Gang
Surface Mount10BOXDGSM
Double Gang
Surface Mount10BOXDG45C
4.5" Carlon
Surface Mount10MS09
NEMA 4
Enclosure

TECHNICAL SPECIFICATIONS

Technology	Microwave Motion Sensor
Radiated Frequency	24.125 GHz
Transmitter Radiated Power	< 20 dBm EIRP
Radiated Power Density	< 5 mW/cm ²
Detection Mode	Motion (bidirectional)
Detection Range	4 to 24 inches (adjustable)
Output	Relay with switch-over contact (free of potential)
Max. Voltage	60 VDC; 125 VAC
Max. Current	1 A (resistive)
Max. Switching Power	30 W (DC); 60 VA (AC)
Output Hold Time	0.5 s (in pulsed mode)
Supply Frequency	50 to 60 Hz
Supply Voltage	12 to 24 VAC ± 10% 12 to 24 VDC + 30%; - 10%
Power Consumption	< 1.5 W
Material / Colors	ASA, Nylon, PC / Black, White, Cream
Cable Length	Standard cable up to 16 AWG - 1.5 mm ²
Temperature Range	-4°F to +131°F
Certifications	EMC: 2004 / 108 / EC; FCC: G9B-MS08; IC: 4680A-MS08

Specifications are subject to change without prior notice.

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided "as is" without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.