


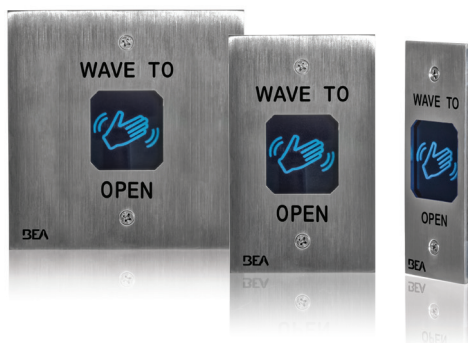


MAGIC SWITCH: MS11

Adjustable range,
stainless steel touchless actuator

FEATURES & BENEFITS

- NEMA 4 (IP65) enclosure capable of use in industrial and extreme washdown environments
- Illuminated blue center changes to green upon signal reception/activation
- Adjustable sensing zone from 2 to 24 inches (pulse or toggle)
- Adjustable audible alert setting, including silent-mode required for hospitals and other noise-sensitive environments
- Configurable output hold time of 1 to 30 seconds allowing unique, user-defined device placement
- Inter-operates with all automatic door control makes and models



TECHNICAL SPECIFICATIONS

Technology	Microwave Doppler Radar
Detection Mode	Motion (bidirectional), Toggle or Timed Mode
Sensing Zone	2 to 24 inches (adjustable)
Hold Time	1 to 30 s
Remission Factor	Silent Mode or Signal Mode Blue (Standby) Green (Activation)
Supply Voltage	12-24 V AC/DC or +5 VDC
Power Consumption	< 2.8W
Temperature Range	-22° F to 158° F
Degree of Protection	NEMA 4 / IP65
Relay	1-Form C Solid State Relay 1A 30VAC/VDC (max)
Dimensions (Overall)	Single Gang: 4.5 in x 2.75 in x 0.98 in Double Gang: 4.5 in x 4.5 in x 0.98 in Jamb: 4.5 in x 1.68 in x 0.98 in
Wire Harness Length	12 in
Material	Stainless Steel (faceplate)/ ABS (center)

RELATED PRODUCTS

Catalog Number	Description
10MS11D	Stainless steel double gang
10MS11J	Stainless steel jamb style
10MS11S	Stainless steel single gang

PRODUCT MOUNTING OPTIONS

10BOX24SGSM	Standard single gang surface mount box (2.75 x 4.5 in)
10BOXDGSM	Standard double gang surface mount box (4.5 x 4.5 in)
10BOXJAMBST	Jamb mount box