PB024 SERIES









EASY INSTALLATION
WEATHER RESISTANT
STAINLESS STEEL

Innovation
Quality
Service

retrofit applications.

The PBO24 series push plate allows for easy installation in both new and

- The PBO24 series is universal to all single gang boxes
- Perfect for applications that are too close to a door frame for a full size square or round push plate
- Beveled edges provide a tamper and vandal resistant solution, allowing no room for objects between the faceplate and the mounting box
- The activation ready design activates by pushing anywhere on the surface
- The standard weather boot between the faceplate and the back plate allows for both indoor and outdoor installation

WWW.BEASENSORS.COM



TECHNICAL SPECS

- A. 16 gauge, 304 2B Stainless Steel Faceplate
- B. 1/8" thick, Aluminum Back Plate
- C. Stainless Steel 6-32 x 1" and 8-32 x 1" Allen head mounting screws
- D. Cherry Switch: Single-pole, 15A, COM / NO / NC contacts

FAMILY OF PRODUCTS



10PBO241 Push To Open Text and Logo



10PBO24L Logo Only



10PBO24E Push To Exit Text Only




10PBO2410 Plain Face




10BOX24SGSM Single Gang Surface Mount Box

DETAILS

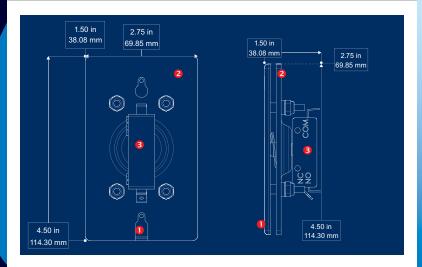

- Faceplate
- Back Plate
- **6** Cherry Switch

COMPONENTS

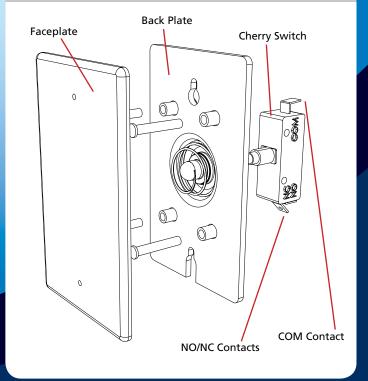

RELATED PRODUCTS



RF-433 433 MHz digital receivers and transmitters with sequencing function



Low Profile Plates 36"×6"×1" High-Low and 4½"×4½"×¼" thin



Push Plates
Weather resistant,
stainless steel push plates
are perfect for any
knowing-act application



Bodyguard Overhead, active infrared safety sensor



EDPS – Enhanced Door Position System A solution that accurately determines the position of an automatic swing door system

BEA Inc. RIDC Park West 100 Enterprise Drive Pittsburgh, PA 15275-1213

PHONE: 1 800.523.2462 FAX: 1 888.523.2462 BEA West Arrow Highway Corp. Ctr. 190 E. Arrow Hwy, Suite A San Dimas, CA 91773-3314

PHONE: 1 800.523.2462 FAX: 1 888.523.2462 BEA Latin America Mexico / Caribbean 190 E. Arrow Hwy, Suite A San Dimas, CA 91773-3314

PHONE: 1 800.711.1398 FAX: 1 888.523.2462

