

PBDGP SERIES

DUAL VESTIBULE PUSH PLATE



DESIGNED FOR VESTIBULE APPLICATIONS

DESCRIPTION

The **PBDGP SERIES**, dual vestibule push plate, provides an aesthetically pleasing solution for vestibule applications. This provides an option to open one set of doors independently from the other set. Also, this push plate is an ideal addition to any automatic sequencing application.

Hard Wired or Wireless

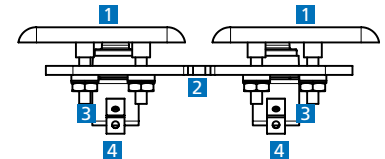
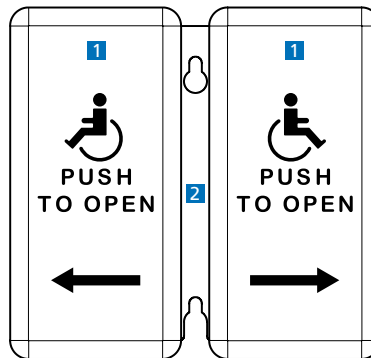


PBDGP Series



10PBDGP1
Push To Open
Text and Logo

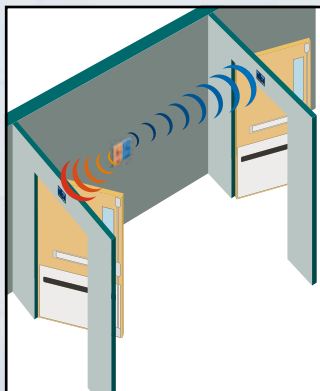
Components View




- 1 Faceplates
- 2 Backplate
- 3 Cherry Switches
- 4 Contacts

FEATURES

- Provides a more efficient design for vestibule applications by eliminating the need for two separate push plate on a wall
- Beveled edges reduce accidental damage from any side
- Stainless steel faceplate is scratch/scuff resistant and will not deteriorate or rust from exposure to liquids and other cleaning products
- Graphics are etched onto the faceplates for maximum durability
- A weather boot is located between the faceplates and the backplate for all-weather applications



1 PLATE FOR 2 DOORS

OPEN ONLY ONE
SET OF DOORS

10RD433 / 10RD433EH



10TD433PB3V




10BR3

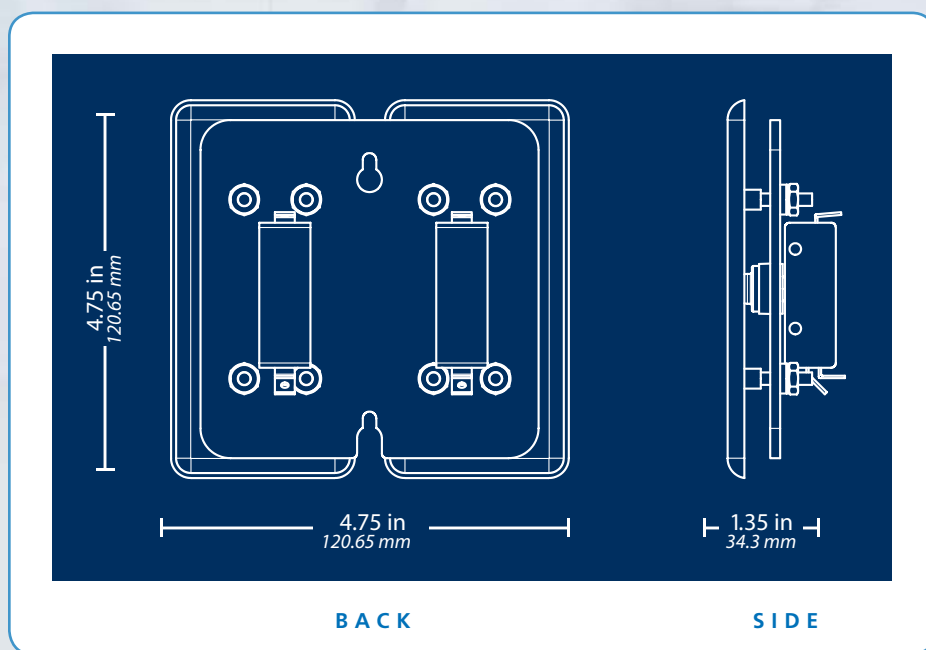
BENEFITS

- Only one vestibule plate needed for interior vestibule applications
- Conserves energy by only opening selected doors
- Complements any dual vestibule sequencing application
- Provides entrapment protection

MOUNTING ACCESSORIES

10BOX475SQSM
4.75" Square
Surface Mount10BOX475SQFM
4.75" Square
Flush Mount10BOLLARD
BEA Mounting Post
Bronze/Silver/Black50.5016
Mounting
Adapter Ring10BOXDG45C
Plastic Surface
Mount Box10BOXDGSM
Double Gang
Surface Mount

DIMENSION DETAILS



TECHNICAL SPECIFICATIONS

Materials

Faceplate: 16 gauge, 304 2B Stainless Steel

Backplate: 1/8 inch thick, Aluminum

Mounting Screws: Stainless Steel, 6-32 x 1 inch; 8-32 x 1 inch
Allen Head Size: 5/64

Cherry Switch

Single-pole, 15 A, COM/NO/NC

Compatible Wireless Frequencies

433, 390, and 300 MHz

Specifications are subject to change without prior notice.

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided "as is" without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.



PUSH PLATES

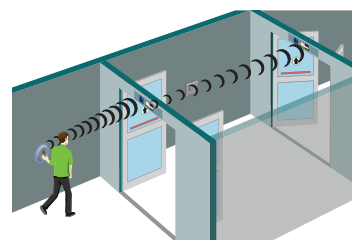
STAINLESS STEEL PUSH PLATES



PRIMARY APPLICATIONS



Low Energy



Vestibules



Request To Exit

DESCRIPTION

BEA offers a comprehensive line of stainless steel push plates available in 4.5, 4.75 and 6 inch round and square sizes with a variety of popular design options available. Also available, jamb style push plates are a flexible alternative to standard size plates, offering the same performance but in a more compact size.

These ADA-compliant push plates improve access for those with disabilities and seamlessly integrate with an automatic door's activation and security features.

These push-plates are designed to fit into standard electrical gang boxes, and/or BEA's line of plastic enclosures.

The faceplate has concealed fasteners to minimize vandalism. The push-plates may be hard wired to the door operator or connected to BEA's line of radio controlled transmitters.

FEATURES & BENEFITS

- 1/16 inch thick stainless steel for maximum durability
- Concealed fasteners to minimize vandalism
- User-friendly kits containing push plates and accessories available upon request
- Wireless packages available for installer convenience
- Available through geographically convenient distribution centers
- Various text, graphic and logo options available
- Compatible with both surface and flush mount boxes

TECHNICAL SPECIFICATIONS







Faceplate Material	16 gauge, 304 2B Stainless Steel
Backplate Material	1/8 inch thick, Aluminum
Mounting Screws	Stainless Steel, 6-32 x 1 in & 8-32 x 1 in Allen Head Size: 5/64
Cherry Switch	Single-pole, 15A, COM/NO/NC, UL Recognized
Compatible Wireless Frequencies	900, 433 or 300 MHz




BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545
www.BEAinc.com

DIMENSIONAL DRAWINGS

4.5" ROUND	6" ROUND	4.5" SQUARE	4.75" SQUARE	6" SQUARE	JAMB	SINGLE GANG	VESTIBULE
4.5 in X 0.62 in	6 in X 0.62 in	4.5 in X 0.62 in	4.75 in X 0.62 in	6 in X 0.62 in	1.5 in X 4.75 in	2.75 in X 4.50 in	4.75 in X 4.75 in
							
4.5 in	6 in	4.5 in	4.75 in	6 in	1.5 in	2.75 in	4.75 in

SERIES BREAKDOWN

DESCRIPTION	4.5" ROUND	6" ROUND	4.5" SQUARE	4.75" SQUARE	6" SQUARE	JAMB	SINGLE GANG	VESTIBULE
PUSH TO OPEN	 10PBR45	 10PBR	 10PBS2GBLK	 10PBS	 10PBS6	 10PBJ		
TEXT AND LOGO	 10PBR451	 10PBR1	 10PBS451	 10PBS1	 10PBS61	 10PBJ1	 10PBO241	 10PBDGP1
LOGO ONLY	 10PBR45LL	 10PBRLL	 10PBS45LL	 10PBSLL	 10PBS6L	 10PBJL	 10PBO24L	
PLAIN FACE	 10PBR4510	 10PBR10	 10PBS4510	 10PBS10	 10PBS610	 10PBJ10	 10PBO2410	
PUSH TO SLOW, PRESS TO OPERATE OR PUSH TO EXIT	 10PBR4510PTS		 10PBS45POD	 10PBSE		 10PBJE	 10PBO24E	
WHITE ON BLUE PUSH TO OPEN			 10PBS45B					
WHITE ON BLUE TEXT AND LOGO			 10PBS451B	 10PBS1B		 10PBJ1B		
WHITE ON BLUE LOGO ONLY						 10PBJLB		
BLUE ON BRASS* TEXT AND LOGO				 10PBS1SB				

*satin or bright brass

www.BEAinc.com

© 2015 BEA, Inc. All rights reserved.

PUSH PLATES

STAINLESS STEEL PUSH PLATES

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545

