


STANDARD RINGS

RP Standard Ring Package

The RP standard ring package includes a 1E-R3 ($\frac{3}{16}$ ") and 1E-R5 ($\frac{3}{8}$ ") ring.

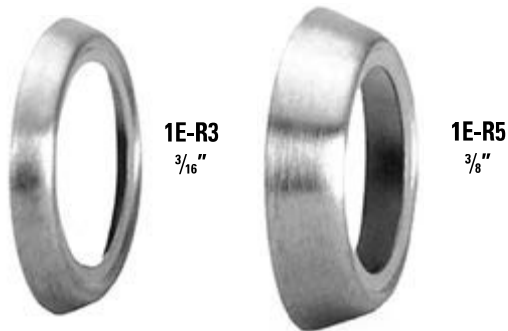

RP Standard Ring Package

The RP standard ring package includes a 1E-R3 ($\frac{3}{16}$ ") and 1E-R5 ($\frac{3}{8}$ ") ring.




RP3 Ring Package

The RP3 ring package for the 1E-62, 1E-72 and 1E-74 cylinders includes a 1E-R2 ($\frac{1}{8}$ ") and a 1E-R5 ($\frac{3}{8}$ ")



RP5 Ring Package

The RP5 ring package for the 1E-62, 1E-72 and 1E-74 cylinders includes a 1E-R2 ($\frac{1}{8}$ "), 1E-R4 ($\frac{1}{4}$ ") and a 1E-R5 ($\frac{3}{8}$ ")

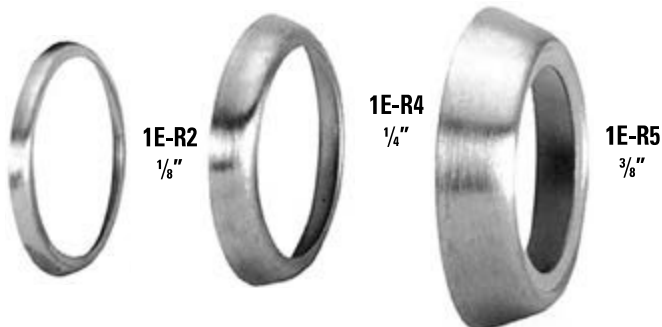

STANDARD CAM

Standard Cam for 1E-64, and 1E-74 Mortise Cylinders

Unless otherwise specified, the 1E-C4 cam plied on all 1E mortise cylinders.

Commonly used cams are listed on page 8.

If a cam other than the variety listed is needed, a sample cam should be forwarded to your local BEST office along with the lock manufacturer's name and lock series or identification number.



SPINDLES



1E-S2 Spindle (Steel) - A-40100-SH

1E-S3 Spindle (Bronze) - A-40100-Z

5" Spindle - A-54950; $\frac{5}{32}$ " **Spindle** - A-40101

The 1E-S2 flat spindle is supplied standard on all 1E rim cylinders. If marine application is necessary, request "marine construction" (1E-S3 bronze spindle and non-ferrous materials supplied). A five (5) inch spindle is available for thick door applications.

MORTISE SERVICE EQUIPMENT



ED211



ED212

ED211 Mortise Cylinder Wrench

The BEST mortise cylinder wrench and test handle is an essential dual-purpose tool. The double end is used primarily to install or remove BEST mortise cylinders without marring the cylinder surface finish. The single end may be used to test the lock operation, as well as align the throw pins.

To order specify: ED211 mortise cylinder wrench.

ED212 Mortise Cylinder Cam Assembly Tool

Mortise cylinder cams are quickly changed with the use of this tool. Approximate length 1 $\frac{3}{4}$ ".

To order specify: ED212 assembly tool.

ED221 Mortise Cylinder Thread Repair Die

Tool for re-threading 1 $\frac{5}{32}$ " diameter cylinders.

To order specify: ED221 thread repair die.

ED222 Cylinder Cam Testing Tool

Special cylinder / wrench assembly. Screws provide rapid means to install cams for testing.

To order specify: ED222 cam testing tool.

ED225 Hole Tap For 1 $\frac{5}{32}$ " Mortise Cylinder

Tap tool used to re-thread housing threads for 1E mortise cylinders.

A40095 Standard Throw Pins

RIM CYLINDERS



STANDARD CAM

SPINDLES

SERVICE EQUIPMENT