




Flooring/Fill Material used on TER/TRD Doors

Bilco type TER and TRD doors are counterbalanced according to the weight of the cover. The weight of the cover is dependent on the flooring/fill material which the customer installs in the 1" [25 mm] deep pan on the Bilco cover.

Therefore for the door to be balanced correctly Bilco is required to know information regarding the customer's flooring/fill material.

Caution: Door will be oversprung until flooring/fill material is installed in the field.

Fill in the spaces below:

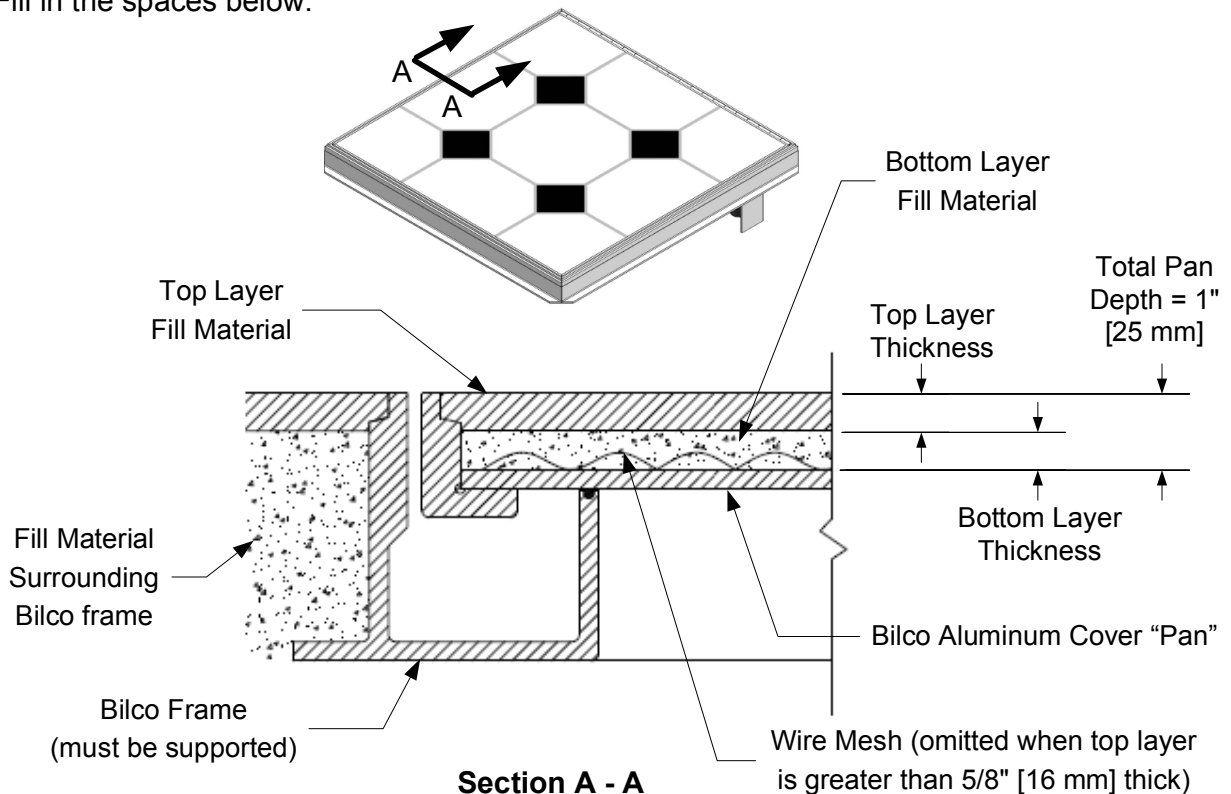

Top Layer Fill Material	Thickness:		(example: 1/4 inch)
	Description:		(example: granite)
Bottom Layer Fill Material	Thickness:		(example: 3/4 inch)
	Description:		(example: concrete)

Top Layer + Bottom Layer = 1" [25 mm]

If top layer thickness is 1 inch [25 mm] then it occupies the pan fully and therefore bottom layer info can be omitted.