


Face frame adapter plates

Cam adjustable center mount

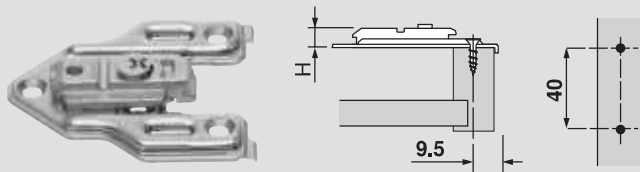

- Steel, zinc die-cast and nickel-plated
- Attached with #7 x 3/4" wood screws
- Center mount **9.5** (3/8")
- Cam height adjustment ± 2 mm
- 175H6000 not for use with INSERTA hinges

Part no.

0 plate height (H)	175H6000
--------------------	----------


3 plate height (H)	175H6030
--------------------	----------

4.5 plate height (H)	175H6040
----------------------	----------

6 plate height (H)	175H6060
--------------------	----------

NOTE: CLIP top BLUMOTION and CLIP top 110° INSERTA hinges can be used with this plate

Cam adjustable off-center mount

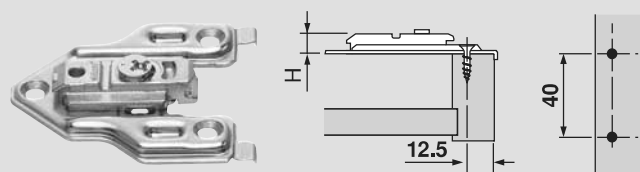


- Steel, zinc die-cast and nickel-plated
- Attached with #7 x 3/4" wood screws
- For use with INSERTA hinge cups
- Off-center mount **12.5** (1/2")
- Cam height adjustment ± 2 mm

Part no.

0 plate height (H)	175H6600
--------------------	----------

Center mount

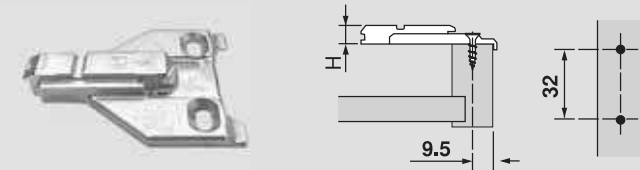


- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Center mount **9.5** (3/8")
- Height adjustment ± 2 mm

Part no.

3 plate height (H)	175L6030.21
--------------------	-------------

Off-center mount

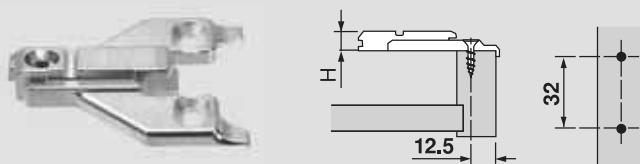

- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Off-center mount **12.5** (1/2")
- Height adjustment ± 2 mm


Part no.

0 plate height (H)	175L6600.22
--------------------	-------------

3 plate height (H)	175L6630.22
--------------------	-------------

6 plate height (H)	175L6660.22
--------------------	-------------

With flange

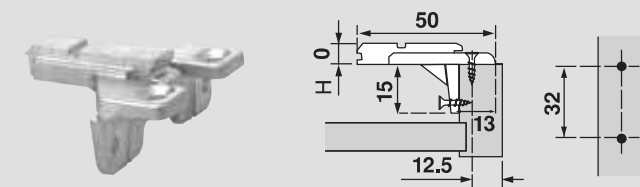

- Recommended when using 170° and zero protrusion hinges on face frame cabinets
- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Off-center mount **12.5** (1/2")
- Height adjustment ± 2 mm


Part no.

0 plate height (H)	175L6600.24
--------------------	-------------

NOTE: Use of PLATEMATE required with all face frame adapter plates. Reference page 96

Inset face frame adapter

Truss head screw

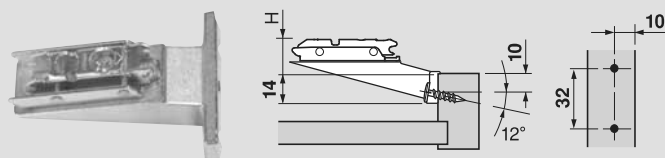

- Zinc die-cast, nickel-plated
- Attached with #8 x 3/4" truss head screws
- Can be used with applied bead molding
- Cam height adjustment ± 2 mm
- Use with half-cranked hinges only
- Wide angle hinges not recommended
- Use of PLATEMATE required for installation

Part no.

9 plate height (H)	175H5030.21
--------------------	-------------