



Double Acting Spring Hinges

3000 Series

3029- 3" through 8" MORTISE

ANSI K81041

CL3029- 5", 6" & 7" BALL TIPS

ANSI K81041

- DOOR FLANGE IS MORTISED INTO EDGE OF DOOR
- CLASSIC MODELS AVAILABLE WITH BALL TIPS 5", 6" & 7" ONLY
- JAMB FLANGE IS SURFACE APPLIED TO JAMB
- STEEL MATERIAL
- NON- TEMPLATE
- NON-HANDED
- DO NOT USE ON DOORS WITH HINGE EDGE BEVELED
- PACKED WITH ALL WOOD SCREWS

3029- 5 x 3 1/2" MORTISE

3029- 6 x 4 1/2" MORTISE

3029- 8 x 4 1/2" MORTISE


ANSI K81151

CL3029- 5 x 3 1/2" BALL TIPS

CL3029- 6 x 4 1/2" BALL TIPS


ANSI K81151

- DOOR FLANGE IS MORTISED INTO EDGE OF DOOR
- CLASSIC MODELS AVAILABLE WITH BALL TIPS 5" & 6" ONLY
- JAMB FLANGE IS SURFACE APPLIED TO JAMB
- STEEL MATERIAL
- TEMPLATE DOOR LEAF
- NON-HANDED
- DO NOT USE ON DOORS WITH HINGE EDGE BEVELED
- PACKED WITH MACHINE AND WOOD SCREWS




3029

non-template hole pattern

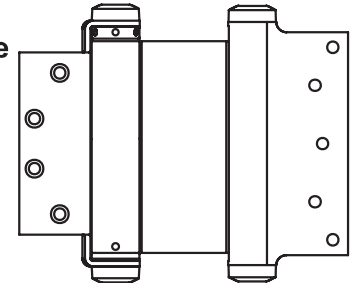

3029-6x4 1/2
template door
leaf

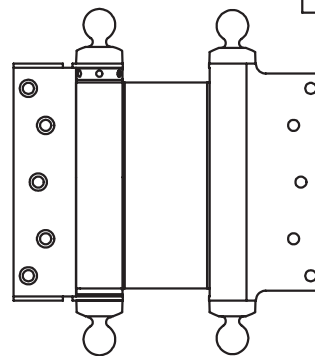

CL3029

ball tips

3029 HINGE SELECTION FOR MAXIMUM DOOR SIZE

ITEM NUMBER	2 HINGES		3 HINGES		DOOR THICKNESS	MINIMUM DOOR HEIGHT	QUANTITY		AVERAGE WEIGHT PER CASE
	DOOR WEIGHT	DOOR WIDTH	DOOR WEIGHT	DOOR WIDTH			BOX	CASE	
3029-3	35	2'-0"	39	2'-8"	3/4" to 1"	5'-0"	2 ea.	40 ea.	50 lbs.
3029-4	60	2'-4"	75	3'-0"	7/8" to 1 1/4"	6'-8"	2 ea.	24 ea.	45 lbs.
3029-5	65	2'-8"	93	3'-0"	1 1/8" to 1 1/2"	6'-8"	2 ea.	16 ea.	48 lbs.
CL3029-5								12 ea.	38 lbs.
3029-6	75	2'-8"	107	3'-0"	1 1/4" to 1 3/4"	7'-0"	2 ea.	12 ea.	51 lbs.
CL3029-6								8 ea.	35 lbs.
3029-7	82	3'-0"	120	3'-6"	1 3/8" to 2"	7'-0"	2 ea.	8 ea.	46 lbs.
CL3029-7								8 ea.	48 lbs.
3029-8	103	3'-6"	143	4'-0"	1 1/2" to 2"	7'-0"	2 ea.	6 ea.	54 lbs.
*3029-5x3.5	65	2'-8"	93	3'-0"	1 3/8"	6'-8"	2 ea.	16 ea.	48 lbs.
CL3029-5x3.5								12 ea.	38 lbs.
*3029-6x4.5	75	2'-8"	107	3'-0"	1 3/4"	7'-0"	2 ea.	12 ea.	50 lbs.
CL3029-6x4.5								8 ea.	40 lbs.
*3029-8x4.5	103	3'-6"	143	4'-0"	1 3/4"	7'-0"	2 ea.	6 ea.	52 lbs.

* Hinges will fit into standard full mortise hinge cutout in hollow metal door ; but if standard hinge locations are furnished on 1 3/4" hollow metal doors, we recommend using 3029-8 x 4 1/2 hinges for maximum support. Request template from factory for door and frame clearance required.

SH-13

"Over 125 Years of Quality"