



## Full Surface Hinges

### HEAVY WEIGHT - SWING CLEAR

For heavy weight doors / high frequency. Used where conditions require the door to clear the opening at 90 degrees.

#### BB5224 STEEL

bearings are hardened steel raceways and balls with steel pin **ANSI A8321**


#### BB5225 BRASS

bearings are stainless steel raceways and balls with stainless steel pin **ANSI A2321**

#### BB5226 STAINLESS STEEL

bearings are stainless steel raceways and balls with stainless steel pin **ANSI A5321**

- TEMPLATE
- FOUR BALL BEARINGS
- FIVE KNUCKLES
- NON-RISING REMOVABLE PIN
- BUTTON TIP PIN & PLUG

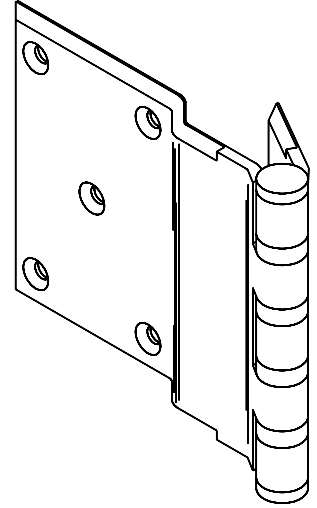

HINGE SIZE	GAUGE	DOOR LEAF WIDTH	JAMB LEAF WIDTH	SCREW SIZE		NUMBER OF HOLES	QUANTITY	
				DOOR THRU BOLTS	JAMB MACHINE SCREWS		BOX	CASE
5	( .050 )	.190	5.546	1.515	1/4-20OH x 2	12-24OH x 1/2	9	3 ea. 24 ea.

## Full Surface Anchor Pivot

### HEAVY WEIGHT - LUBE BEARING - ANCHOR PIVOT

For medium and heavy weight doors subject to high frequency service and abuse, providing increased reinforcement at the top corner on the hinge side of the door and jamb where stress can occur and is surface applied with no special frame or door preparation. This pivot will help overcome field problems such as bent hinge leaves, loose hinge reinforcements and loose screws.


#### 7004 STEEL

with steel pin

#### 7006 STAINLESS STEEL

with stainless steel pin

- NON-TEMPLATE
- LUBE BEARING
- HEX HEAD THREADED PIVOT PIN STANDARD
- STANDARD SCREW PACK OF:
  - 8ea. MACHINE SCREWS ( 1/4"-20 x 3/4" FHMS )
  - 8ea. WOOD SCREWS ( 8ea. #14 x 1 1/4" FHMS )
  - 4ea. SLEEVE BOLTS FOR 1/4"-20 THREAD TO FIT 1 3/4" DOORS
- SHIMS MAY BE USED IF NEEDED

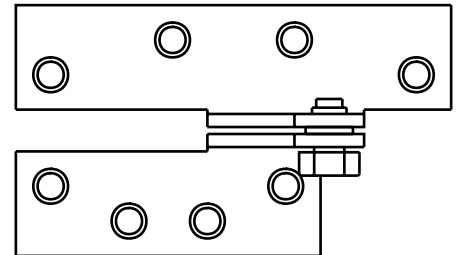

ITEM NUMBER	HANDING OF DOOR	GAUGE	BUTT HINGE WIDTH	PROJECTION	QUANTITY PER CASE	AVERAGE WEIGHT PER CASE	DOOR THICKNESS
7004-045L	LH	.187	4 1/2"	3/4"	12	19 lbs.	1 3/4
7004-045R	RH	.187	4 1/2"	3/4"	12	19 lbs.	1 3/4
7004-050L	LH	.187	5 "	1"	12	19 lbs.	1 3/4
7004-050R	RH	.187	5 "	1"	12	19 lbs.	1 3/4
7006-045L	LH	.187	4 1/2"	3/4"	12	22 lbs.	1 3/4
7006-045R	RH	.187	4 1/2"	3/4"	12	22 lbs.	1 3/4
7006-050L	LH	.187	5 "	1"	12	22 lbs.	1 3/4
7006-050R	RH	.187	5 "	1"	12	22 lbs.	1 3/4

**AH-25**

**"Over 125 Years of Quality"**