

- ☐ Model 5922 — Recessed **Bradex®**
- ☐ Model 5922-10 — Semi-Recessed (recesses 3¼", projects 1¼")
Note: Single door; does not allow clearance for grab bar.
- ☐ Model 5922-11 — Surface-Mounted (projects 4½")
Note: Single door; does not allow clearance for grab bar.

- ☒
- Seat Cover Dispenser/Dual Roll Tissue Dispenser

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, 1" wide with ¼" return.

DOOR: 18 gauge stainless steel with full-length piano hinge and tumbler lock keyed like other Bradley units.

SPINDLES: polyethylene, non-removable by user.

Capacity

Toilet Seat Cover Dispensers — 1,000 standard single-fold or half-fold toilet seat covers; Toilet Tissue Dispensers — two standard core toilet tissue rolls through 5¼" in diameter.

Operation

Hinged access door permits servicing of components from one side.

Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 15 $\frac{3}{4}$ "W x 28 $\frac{7}{8}$ "H x 4 $\frac{1}{4}$ "D. Secure to framing with mounting screws (included) at holes provided. Recessed unit allows clearance for grab bar (not included) across front of unit. Semi-recessed and surface-mounted units utilize one piece door; does not allow clearance for grab bar.



Guide Specification

Recessed combination unit shall include toilet seat cover dispenser and toilet tissue dispenser, and be fabricated of stainless steel with seamless exposed surfaces in satin finish. Door and back panel shall be 18 gauge. Door shall have piano hinge and tumbler lock.

Overall dimensions: 17¹/₈"W x 30⁵/₈"H x 4¹/₂"D.

Washroom Accessories

Document No. 8610

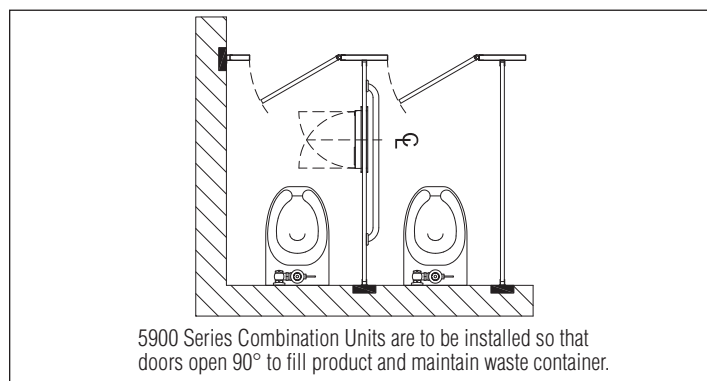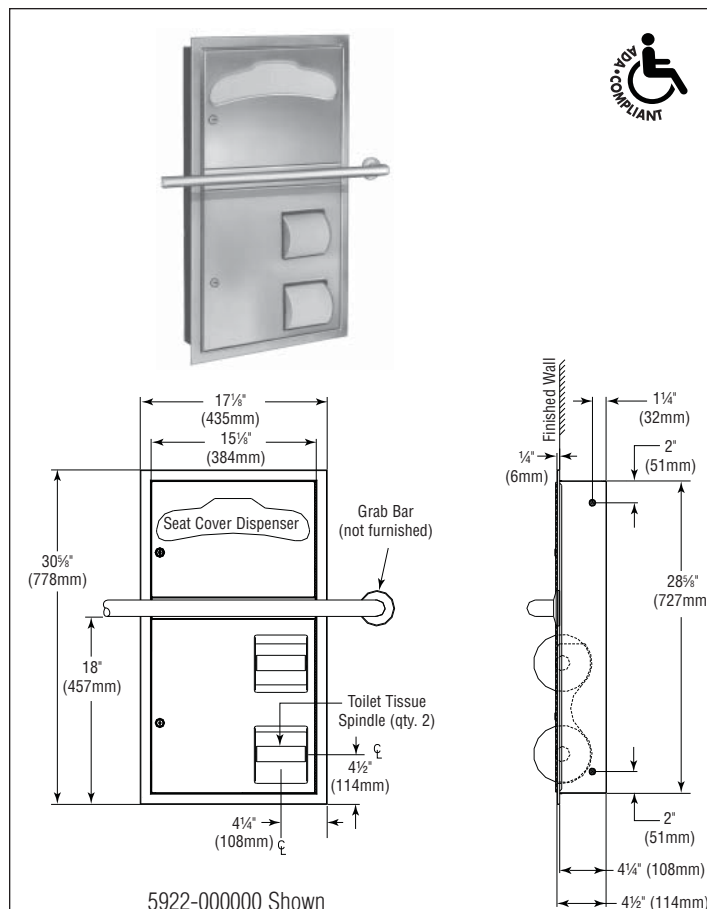

 ADA Compliant

- ✔ Consult local and national accessibility codes for proper installation guidelines.
- ✔ Conformity and compliance to local and national codes is the responsibility of the installer.