



CM-324/N



CM-324/42



CM-324/41WS



CM-324/40W

## CM-324 SERIES

### ACTIVE INFRA-RED 'HANDS-FREE' SWITCH

#### FEATURES

- ADJUSTABLE OPERATING RANGE 1"-26"
- ADJUSTABLE TIME DELAY 1-5 SECONDS
- FAIL-SAFE/NON-FAIL-SAFE SELECTABLE
- ON-BOARD LED FOR EASE OF SET-UP (SELECTABLE ON/OFF)
- SUPER-FAST ACTIVATION RESPONSE <100MS
- EXCELLENT PERFORMANCE IN ALL LIGHTING CONDITIONS
- 12/24V AC/DC OPERATION
- FULLY SHIELDED AGAINST EMI, LINE VOLTAGE SPIKES AND NOISE
- HEAVY DUTY 5 AMP RELAY, FOR USE WITH ALL AUTOMATIC OPERATORS AND ELECTRIFIED LOCKS
- STAINLESS STEEL OR HIGH-IMPACT POLYCARBONATE FACEPLATES
- ROHS COMPLIANT

#### DESCRIPTION

**Sure-Wave™ Hands-Free Switches** is an active infra-red device designed for use with an automatic door operator or door-locking product (such as an electric door strike or magnetic lock) where physical contact with a switch poses a health risk or is simply inconvenient. The switch assembly will fit in a variety of locations from a 1 3/4" door frame to a single or double gang electrical box.

#### APPLICATION

Sure-Wave™ hands-free switches are American Disability Act (ADA) compliant, and provide barrier free access and egress to buildings and washroom facilities. The rugged construction and relay rating make them ideal for use on low-energy automatic doors, drive-up windows, and interior and exterior doors in virtually any commercial (office, retail), institutional (school, hospital or clinic), or industrial (manufacturing) facility.

#### ARCHITECTS /ENGINEERS SPECIFICATIONS

All door activation switches to be used throughout the facility shall be CM-324 Sure-Wave™ Series active infra-red hands-free switches manufactured by Camden Door Controls.

The switches shall be jamb/narrow, single gang or double gang, as required. They shall have an on-board LED for ease of set-up, fail-safe or non-fail-safe selectable, have an adjustable operating range of 1"-26" and a relay contact rating of 5 amps @ 30VDC. The switches shall also be ROHS compliant. Switches mounted outdoors, or exposed to interior water/humidity shall be mounted with weather resistant integral rubber gasket and back box, supplied by the same manufacturer.

# ACTIVE INFRA-RED 'HANDS-FREE' SWITCHES

## SPECIFICATIONS

TECHNOLOGY:	INFRA-RED WITH CODED MODULATED CARRIER
SECURITY:	AUTOMATIC SELF-CHANGING ID
OPERATING MODES:	PULSE (SENSE) / TOGGLE
OPERATING TEMP:	-4°F TO +153°F (-20°C TO +85°C)
OPERATING VOLTAGE:	12-24 VOLTS, AC/DC $\pm$ 12%
CURRENT DRAW:	50 - 60 MA.
RESPONSE TIME:	100 MS.
ACTIVATION RANGE:	MINIMUM 1" - 3" (25MM - 75MM) MAXIMUM 1" - 26" (25MM - 660MM)
RELAY OUTPUT:	FORM 'C' (SPDT)
RELAY CONTACT RATING:	5 AMPS @ 30 VDC
OUTPUT TYPE:	NORMAL OR FAIL-SAFE
CONNECTIONS:	11" 22 AWG LEADS
TIME DELAY:	1 TO 5 SECONDS
ELECTRICAL LIFE:	100,000 OPERATIONS @ RATED CAPACITY 500,000 OPERATIONS @ 1/2 RATED CAPACITY

## ORDERING INFORMATION

### CM-324 SURE WAVE™ POLYCARBONATE FACEPLATES

JAMB WIDTH	SINGLE GANG	DOUBLE GANG	DESCRIPTION
CM-324/N	CM-324	CM-324/W	TOUCHLESS SWITCH WITH PLAIN (BLANK) FACEPLATE
CM-324/40N	CM-324/40	CM-324/40W	TOUCHLESS SWITCH WITH HAND ICON
CM-324/41N	CM-324/41	CM-324/41W	TOUCHLESS SWITCH WITH HAND ICON & 'WAVE TO OPEN'
CM-324/42N	CM-324/42	CM-324/42W	TOUCHLESS SWITCH WITH WHEELCHAIR, HAND ICON & 'WAVE TO OPEN'

### CM-324 SURE WAVE™ STAINLESS STEEL FACEPLATES

SINGLE GANG	DOUBLE GANG	DESCRIPTION
CM-324/S	CM-324/WS	TOUCHLESS SWITCH WITH PLAIN (BLANK) FACEPLATE
CM-324/40S	CM-324/40WS	TOUCHLESS SWITCH WITH HAND ICON
CM-324/41S	CM-324/41WS	TOUCHLESS SWITCH WITH HAND ICON & 'WAVE TO OPEN'
CM-324/42S	CM-324/42WS	TOUCHLESS SWITCH WITH WHEELCHAIR, HAND ICON & 'WAVE TO OPEN'


## SURFACE MOUNT BOXES - FLAME RETARDANT POLYMER

**JAMB BOX:** CM-23D: 4 1/2" H x 1 3/4" W x 1 1/2" D (114mm x 44mm x 38mm)

**SINGLE GANG:** CM-34BL: 4 1/2" H x 2 3/4" W x 1 3/4" D (114mm x 70mm x 44mm)


**DOUBLE GANG:** CM-43CBLA: 5" H x 5" W x 2" D (127mm x 127mm x 51mm)

**SURE WAVE™**  
BY CAMDEN

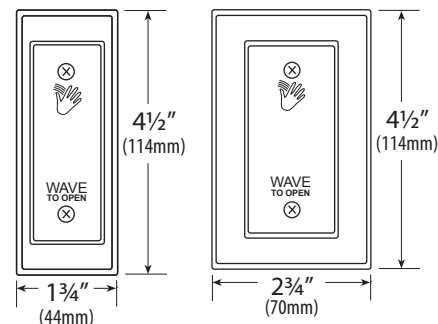


CM-324/41N

CM-324/41




CM-324/41W

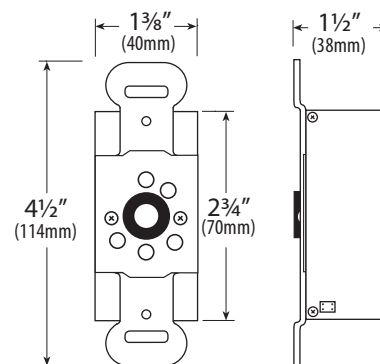

FRONT VIEW

SIDE VIEW

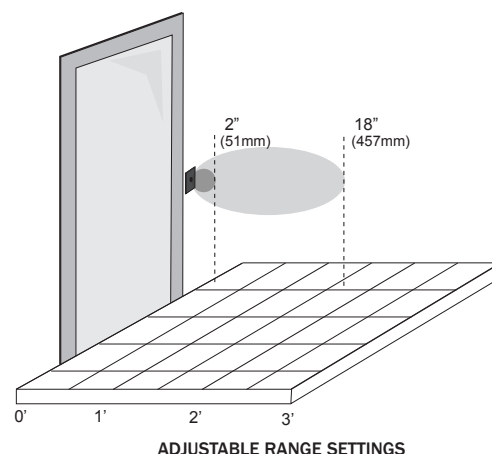

ADJUSTABLE RANGE SETTINGS