


120 VOLTS, .16 AMPS., 60 CY

1. STEEL HOUSING PAINTED WHITE.

2. 1/8" TRANSLUCENT
PLEXIGLASS.


3. TWO 20WATT T6-1/2
INCANDESCENT BULBS.

4. TOP OR SIDE MOUNTING PLATE




- 7- 1 1/2" HOLE FOR ELECT-
RICAL HOOK UP

- 3 ■ 5/8" DIAMETER KNOCK-OUT FOR ELECTRICAL HOOK-UP.




NOTE: IF UNIT IS TO BE WALL MOUNTED, THEN A STEEL BACKPLATE WITH KNOCK-OUT AND MOUNTING HOLES WILL BE USED. OTHERWISE, A MATCHING SIGN IS ON BOTH SIDES.

NOTE: ONLY ITEMS WITH
MARKED BOXES ARE
INCLUDED. 26A-




CARR lighted warning signs can be mounted in the following ways:


CEILING MOUNTED:

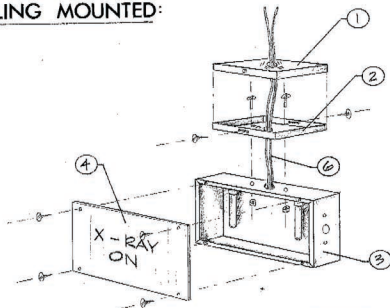


CEILING SUSPENDED:

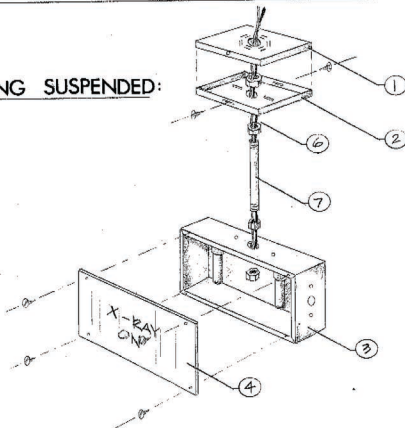

WALL MOUNTED:

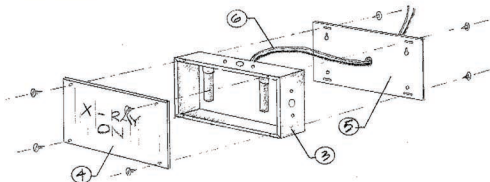

END WALL MOUNTED:

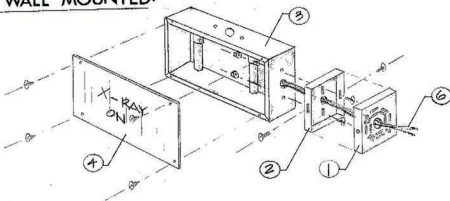

INDEX:

1. Mounting plate.
2. Mounting plate cover.
3. Housing.
4. Sign lenses.
5. Steel back plate.
6. Electrical connection wires (be sure to ground case).
7. Ceiling suspension tube.

CARR CORPORATION
1547 11th Street, Santa Monica, CA 90401
PHONE (310) 587-1113 FAX (310) 395-9751