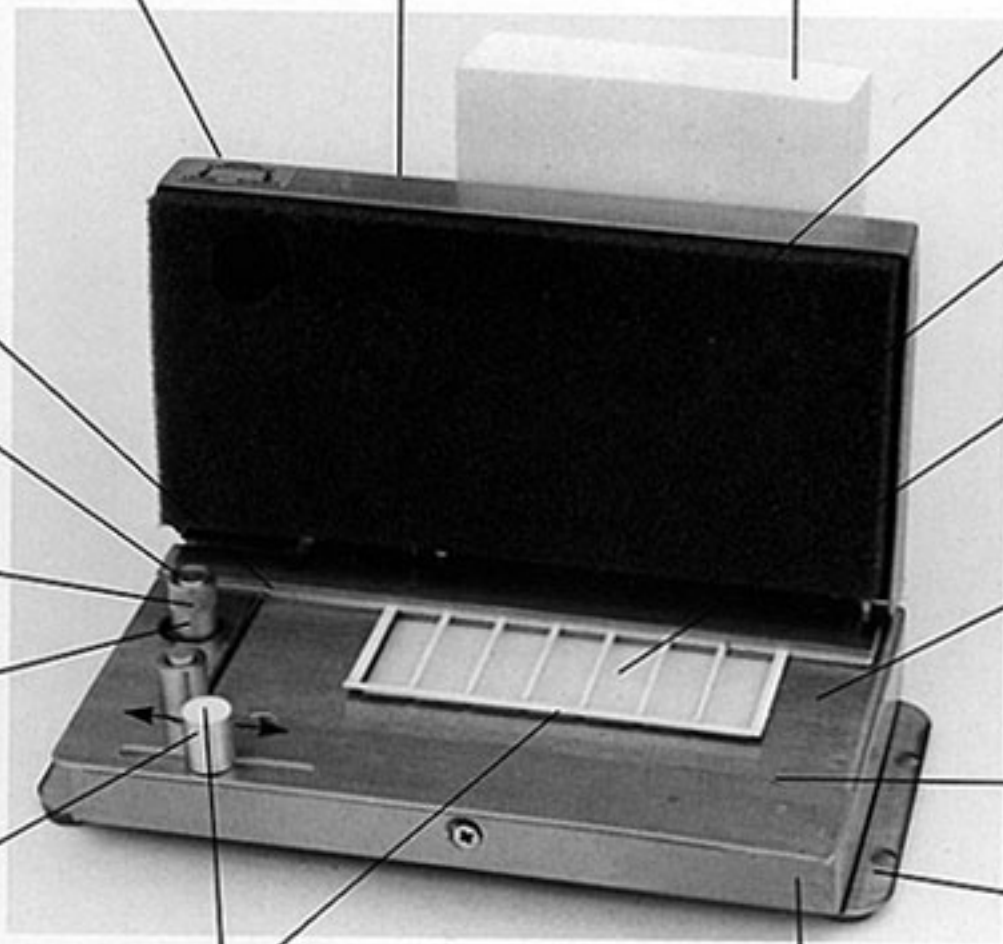
Operation instructions on top
All stainless steel
Optional card holder (IDH-75)
Fully open top. Operator can see film alignment
Audible exposure signal. Harder to miss than a light signal
Compact design. Does not use up counter space. 5¾" wide, 3⅝" deep, 4¼" high
All controls labeled and easily accessible
Unique reflector. Very clear image
Optional knob lock. Exposure setting cannot accidentally change (IDK-90)
Low 6 volt power safer around darkroom liquids
Adjustable auto exposure. Precise, integrated circuit exposure control
Card clip. Card does not move as films are inserted and removed
Optional image position adjuster. Moves image anywhere between 0" and 1" from left edge of film (IDA-85)
Slide out wall mounts
Guides direct film and card into position. Operator can feel when positioning is correct. For allignment reference, guides are white and visable under safelight
Unit is weighted for stability