

requesting

E-BEVEL

.1250 side clearances

"N" or "T" edge only

12 and 14 gauge hinge rail

Pivots only

Reinforcing only * Drawings must be for "E" Bevel

No locks with edge preps for example a G18 use D.1052


E or F Bevel has a 2 5/8 radius.

The pivot prep determines the radius required.



Bullnose
2 - 5/8" radius




Bullnose
2 - 5/8" radius

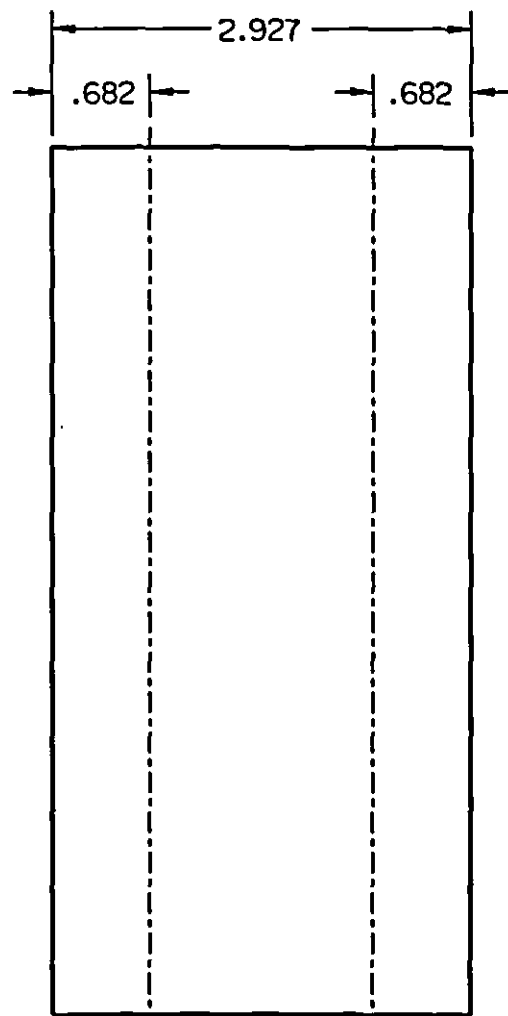


FIRST AND SECOND BEND

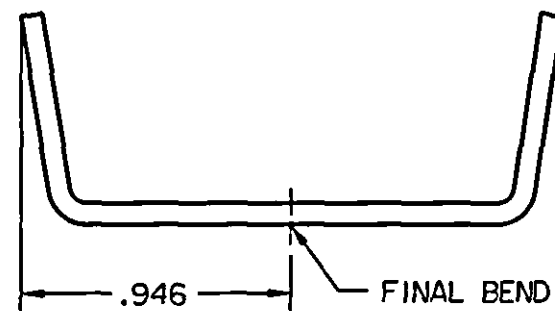
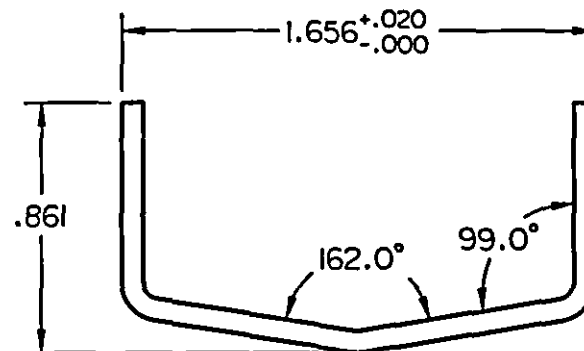


14 GA. - 2.927" x LENGTH REQUIRED

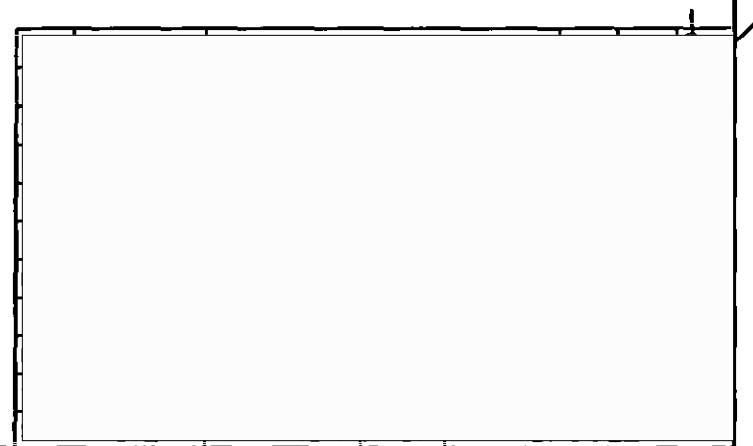

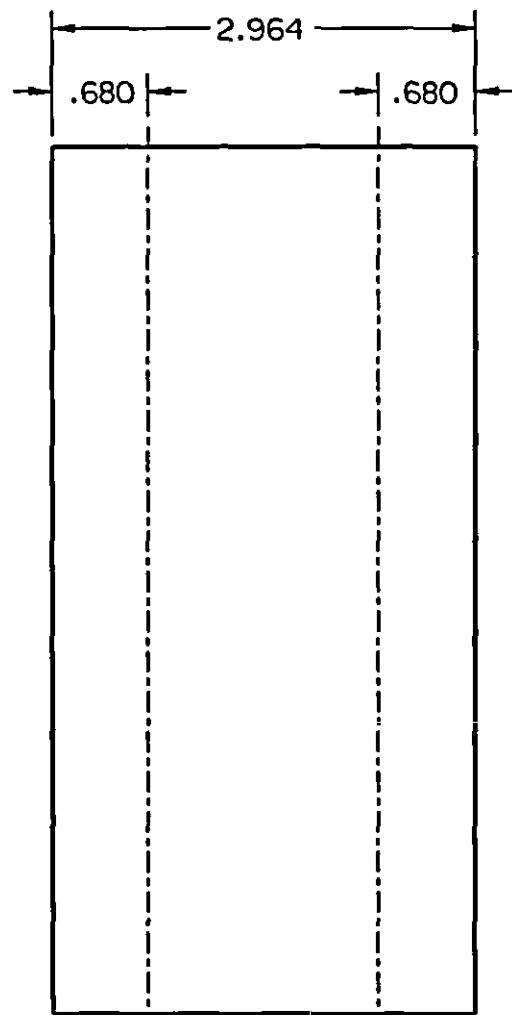

FIRST AND SECOND BEND

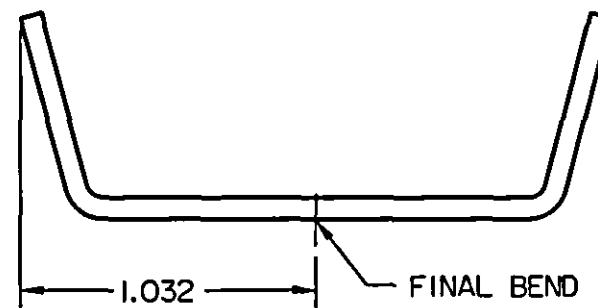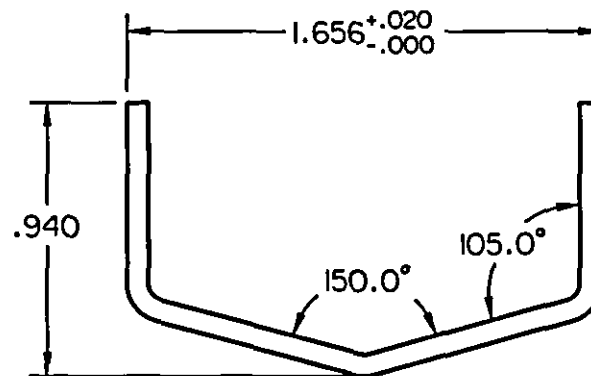

14 GA. - 2.964" x LENGTH REQUIRED