


FULL MORTISE TEMPLATE BUTT HINGES WITH CONCEALED WIRES

Size: 5 × 4½"

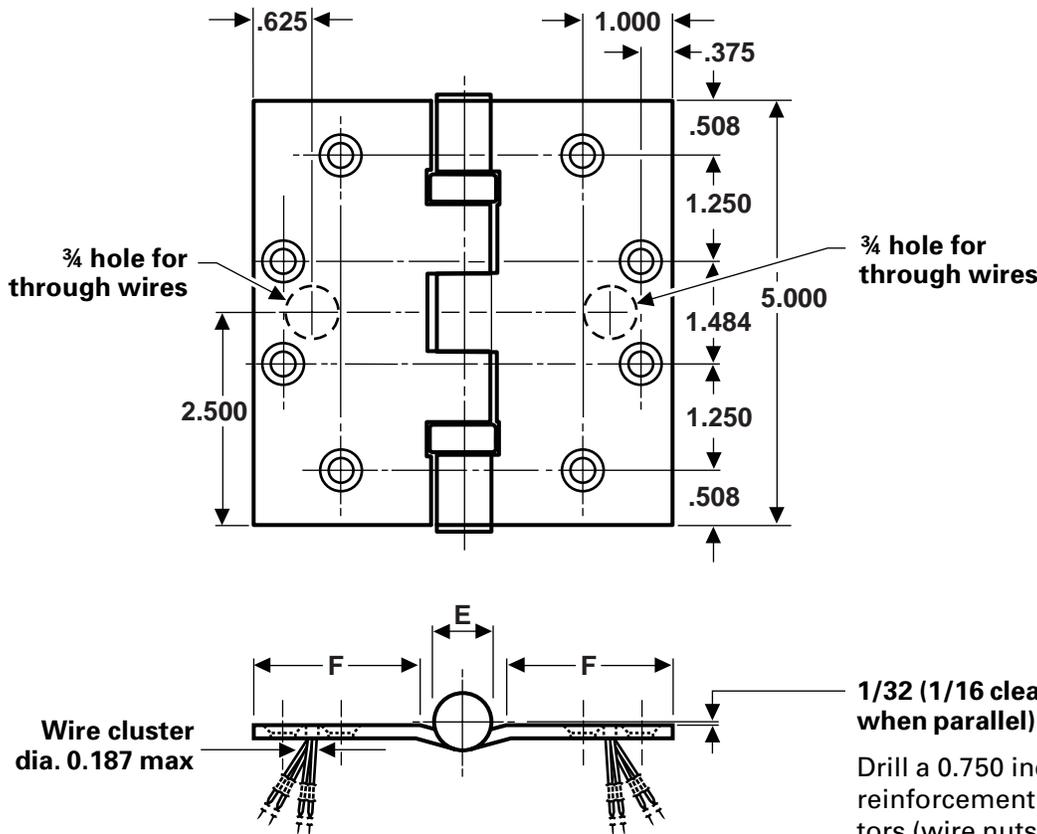

1/32 (1/16 clearance between hinge leaves when parallel).

Drill a 0.750 inch diameter hole in the hinge reinforcement to allow the wires *and* connectors (wire nuts) to pass through freely. A larger hole may be required, depending on connector size.

De-burr both faces of the hole and prime to help avoid damaging wire insulation.

Use a JB-2R Junction Box. See template T90-38R.

NOTE: Available with both concealed wires and a concealed switch. See template T50-19.

Suffix	Number of Wires	Wire Gauge
-54	4 wire	28 AWG
-56	6 wire	28 AWG
-66	6 wire	2 ea 24 AWG 4 ea 28 AWG
-58	8 wire	28 AWG
-10	10 wire	28 AWG

Note: FBB168 & FBB199 are not available with the -66 suffix

CE hinges are available in the following configurations:

CLASS NUMBER		Gauge of Metal	(E) Outside Diameter	DISTANCE FROM EDGE OF LEAF TO SWAGE LINE (F)
Steel Hinges	Nonferrous Hinges			
CECB179	CECB191	0.146	0.669	1 13/16
CEFBB179	CEFBB191	0.146	0.669	1 13/16
CECB168	CECB199	0.190	0.748	1 23/32
CEFBB168	CEFBB199	0.190	0.748	1 23/32
CEIHTCB168	CEIHTCB199	0.190	0.748	1 23/32

Machine Screw Size — ½ × 12-24 F.H.

Wood Screw Size — [1¼ × No. 12 F.H. for standard weight (0.146) hinges
1½ × No. 12 F.H. for heavy weight (0.190) hinges