

404C 440C SERIES MULTIMODE

afi

Single Fiber Four Channel FM Video System



FEATURES:

- Compatible with NTSC; RS-170A & RS-343A and PAL
- Diagnostics: Video, Power and Optical Presence
- Full Color Transmission
- Real Time Video Transmission
- Modules or Rack Cards
- PFM Video Transmission

SPECIFICATIONS:

Video:

I/O Level 1 Vp-p
I/O Impedance 75 Ohms
Bandwidth 10 MHz
Differential Gain 5%
Differential Phase 3°
SNR 55 dB
Connector BNC

Optical:

Wavelength 1300 nm
Maximum Transmission Distance:
404C Series 2.5 Km
440C Series 5 Km
Consult factory for extended distance version.
Loss Budget (62.5/125µ):
404C Series 6 dB
440C Series 12 dB
Consult factory for extended loss budget version.
Connector ST

Temperature (Operating)

-40°C to +74°C, non-condensing

Power Supply:

Module - 24 VAC Center Tap (AFI Part#: PS-24-CT-T)
Power Consumption 5 Watts
Rack Card - (See AFI Part #: SR-20D/2)
Power Consumption 5 Watts

Size:


Module - 8⁷/₈" x 5¹/₂" x 1⁷/₈"
Rack Card - 8" x 2" x 5" (requires 2 rack slots)

ORDERING INFORMATION:

MT-404C = Module Transmitter
RT-404C = Rack Card Transmitter
MR-404C = Module Receiver
RR-404C = Rack Card Receiver
MT-440C = Module Transmitter
RT-440C = Rack Card Transmitter
MR-440C = Module Receiver
RR-440C = Rack Card Receiver


Example:

MT-404C to RR-404C

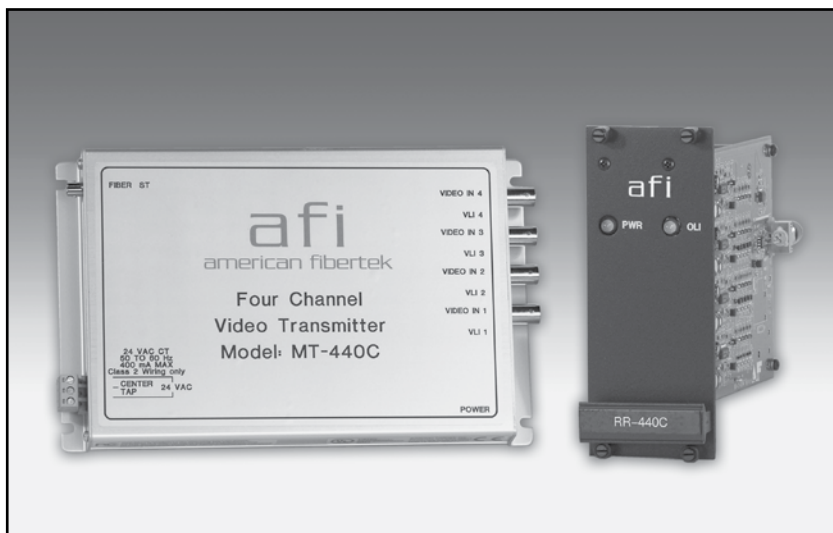

The American Fibertek 404C and 440C Series transmit four channels of high-quality, FM video on one multimode optical fiber at 1300 nm. The 404C Series can be used in applications up to 2.5 Km (1.5 miles). The 440C Series units can be used in applications up to 5 Km (3 miles). For longer distances, consult factory for an extended range 440C-E version. Designed to be completely transparent to all camera and monitor manufacturers, the system requires no field adjustments at installation or additional maintenance thereafter. Diagnostic indicators provide a quick visual indication of system status.

The 404C and 440C Series may be ordered as stand alone modules or rack cards that are mounted in the SR-20D/2 or SR-20R/1 American Fibertek Card Cages.

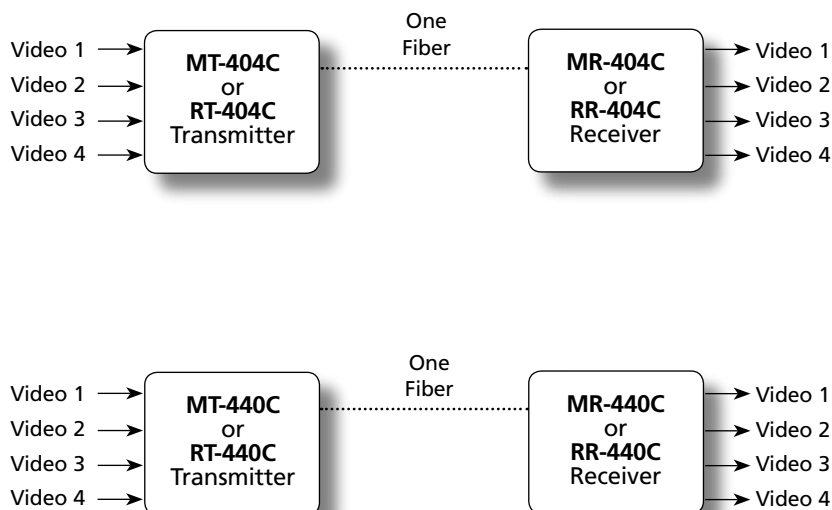

SEE WEBSITE FOR CURRENT RoHS PRODUCT AVAILABILITY

american fibertek inc. 120 Belmont Drive, Somerset, NJ, USA 08873-1204

16 Phone: 732-302-0660 FAX: 732-302-0667 Toll Free: 877-234-7200 Email: mail@americanfibertek.com