

## GE Security

### Overview

The IFS Fiberpak™ FP1505WDM fiber optic transmission kit is designed for full compatibility with "Up-the-Coax" video/data systems from major manufacturers such as Panasonic Proteus™, Pelco Coaxitron™, Robot, Vicon Vicoax™, Videolarm CoaxLynx™, Elbex, and others. The kit includes a transmitter and receiver designed to support the simultaneous transmission of video and "Up-the-Coax" one-way data over one multimode optical fiber. In addition, the kit includes wall mounted AC transformers for both transmitter and receiver as well as a complete installation and operations manual. FiberPak™ Videolinks' Plug-and-play design and included accessories make selecting the right fiber optic modules for your installation easy.

### Application Examples

Compatible With:

- Panasonic®
- Pelco® Coaxitron™
- Robot®
- Vicon® Vicoax™
- Videolarm® CoaxLynx™

## FP1505WDM Fiberpak™ Video Link IFS Video with One-Way "Up-the-Coax" Data Transmission Kit

### Standard Features

- Transmission of Video and "Up-the-Coax" One-Way Data
- Automatic Resettable Fuses on all Power Lines
- Distances up to 1 mile (1.6 km) – Limited by the Manufacturer's "Up-the-Coax" Specifications on Copper Wire
- Full Range Automatic Gain Control (AGC)
- Transparent to Data Encoding / Compatible with Major Data Protocols
- No In-field Electrical or Optical Adjustments Required
- Power and AGC Status Indicating LED's to Monitor System Performance
- Integrated WDM for Greater Product Reliability
- Power Supplies and Installation Manuals Included
- NTSC, PAL, SECAM Compatible
- Full Color Compatibility
- Comprehensive Lifetime Warranty

# Video with One-Way "Up-the-Coax" Data Transmission

Designed to support the simultaneous transmission of video and "Up-the-Coax" one-way data over one multimode optical fiber.



# GE Security

North America  
T 888-GE-SECURITY  
888-437-3287  
F 503-691-7566  
E sales@ifs.com

Asia  
T 852-2907-8108  
F 852-2142-5063

Australia and New Zealand  
T 613-9239-1200  
F 613-9239-1299

Europe  
T 44-113-238-1668  
F 44-113-253-8121


Latin America  
T 305-593-4301  
F 305-593-4300

gesecurity.com/ifs

Specifications subject to  
change without notice

© 2008 General Electric Company  
All Rights Reserved

## Agency compliance



## Made in the USA

Complies with FDA Performance  
Standard for Laser Products, Title 21,  
Code of Federal Regulations, Subchapter J

## Specifications

### Video

Video Input: 1 volt pk-pk (75 ohms)  
Bandwidth: 5 Hz - 10 MHz  
Differential Gain: <5%  
Differential Phase: <5°  
Tilt: <1%  
Signal-to-Noise Ratio (SNR): >55 dB @ 10 dB Attn.

### Data

Data Interface: Pelco Coaxitron™, Vicon Vicoax™, Panasonic Proteus™•,  
Robot and Videolarm  
Data Rate: DC-100 Kbps (NRZ)

### Wavelength

850/1310 nm, Multimode

### Number Of Fibers

1

### Connectors

Optical: ST  
Power and Data: Terminal Block with Screw Clamps  
Video: BNC (Gold Plated Center-Pin)

### Electrical & Mechanical

Power: 12 VDC @ 200 mA  
Current Protection: Automatic Resettable Solid-State Current Limiters  
Circuit Board: Meets IPC Standard  
Size (in./cm.) (LxWxH)  
Surface Mount: 7.0 x 4.9 x 1.0 in., 17.8 x 12.5 x 2.5 cm  
Shipping Weight: < 2 lbs./0.9 kg

### Environmental


MTBF: > 100,000 hours  
Operating Temp: -40° C to +74° C  
Storage Temp: -40° C to +85° C  
Relative Humidity: 0% to 95% (non-condensing)†

†May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.

Note: Coaxitron is a registered trademark of PELCO. Vicoax is a registered trademark of Vicon Industries, Inc. Proteus is a registered trademark of Panasonic, Inc.

- Maximum distance for the Panasonic Proteus™ is 1.5 km.

## System Design

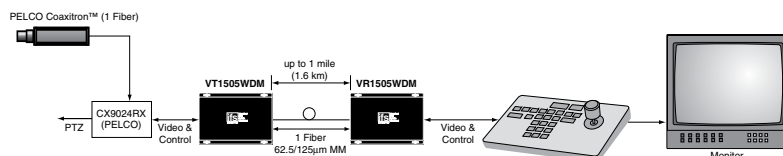

## Ordering Information

|                        | Part Number                                                                                                                                                 | Description                                                                         | Fibers Required | Optical Pwr. Budget | Max. Distance*  |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|---------------------|-----------------|
| Multimode 62.5/125µm** | FP1505WDM                                                                                                                                                   | FiberPak™ Video Transmitter (850/1310 nm)<br>FiberPak™ Video Receiver (1310/850 nm) | 1               | 14 dB               | 1 mile (1.6 km) |
| Accessories♦           | PS-12VDC 12 Volt DC Plug-in Power Supply (Included)<br>PS-12VDC-230 12 Volt DC Plug-in Power Supply, 230 VAC Input (Included if specified at time of order) |                                                                                     |                 |                     |                 |

\*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.  
Distance can also be limited by fiber bandwidth. \*\*For 50/125 Fiber, subtract 4 dB from Optical Power Budget. ♦All accessories are third party manufactured.



imagination at work