



R t l S

S f f t l f l f t t l t f t f l l t .
 t t f l t l f t l l t f t l t f t ,
 l f f t t f f t f t . A t l l t - t l l t l
 t t t f t t f - t l t l f t t f t
 t l l t f f f .
 All t f l t t t t f t t t f f f f f
 t t... t l t - f t l f f , t t t f t . Al l l
 p f f t f t (p) l t t t l p f All t (p A) t l . p f
 t l l t t l f l p A f f t f f t t f l t l l t r . p f t
 t l l t t l t t f t ' l l p l f t f f t t f f l f f
 f t l f .

- Meets NEMA Type 4X and IP66 standards
- IK10 impact rated
- Accommodates wide-angle lenses up to 135°
- Adjustable sunshield (“Y” models)
- Hinged wall mount allows for easy installation
- Standard wall / pole mount
- PoE or 12/24v input model
 - Supports PoE Plus IEEE802.3at compliant cameras
 - True PoE power to the camera (no splitter needed)
 - Automatically adjusts for power loss in long cable runs
 - DPA ensures maximum power to the camera



MODELS*:

FCH11CW

f t | t f $-t$ f
 $\parallel /$ | t , | tf

FCH11C2WY

$$4 \quad t_1 \quad t, \quad t \neq 1 \quad t,$$

FCH11C4WY


4 t, t t80 .3 f^p f t
f, t// l f t l l

FCH11C4WY-MM

4 t, t t80 .3 f^p f f t
f, t f / l f, t l l,
SA l t lt- f- t
t f

Easy Installation Features:

- ① f_r $t t$ $l f$ f f
 ② $t f$ $\parallel$ l $t f$ $t t$ f f
 | f
 ③ p_r $f f$ t $t f$ $t f$
 ④ S $\parallel$ $f f$




* For extreme heat environments see the Thermiq model FCH11Q

SPECIFICATIONS:

General Specifications		
r l l		
r l t		11 (80)
t St l		ll r p l
S (l* *)		1 7 5. 7 10.5 4 55 14.5 6 7)
t		4.5 l
Electrical Specifications		
l t lt		p (l 80 .3 t) r 1 / 4 t l
p r t	4	7 tt t r & Bl r
	1	10 tt t r & Bl r
	p	5 tt r , Bl r & t r
p r t t	4 / 1	S t, r f r t r & Bl r
	p	l 80 .3 f

Mechanical Specifications	
tr t B	p l f t
t B r t t t	t l
t p t t f ()	4.5 (51 108)
t r t	S r t f t t l f t
Environmental Specifications	
Bl f	(t)
ff t p r t A r (pA)	90.8
t f t t t	60 (15.5)
t f t t t	80 (7)
l p r t (t f f t)	l p66/ A4
l	150 (40)
f t f t f	-50 t 140 (45 t 60) t t 165 (4) f A S t f .


MODEL	SHIPPING WEIGHT	BOX DIMENSIONS
11 S f	6.5 l	8.5 x 11.3 x 19.5 (09 x 08 x 05)

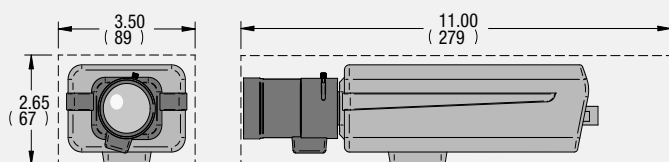

*S f t ft

f () t | t t .

t t | f f t t

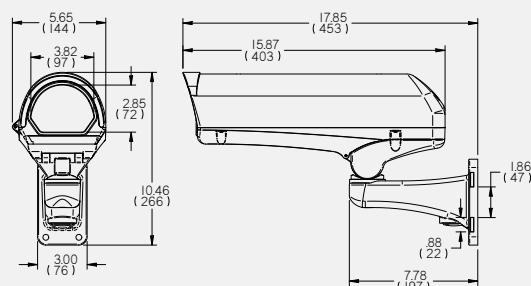

7. ()

						
	U	AR t	R S	U t		R A