


LCD-565 Unit with BNC IN/OUT (no audio)



LCD-562 Unit with RCA Video and Audio



Unit Shown with MB-1 Desk Stand

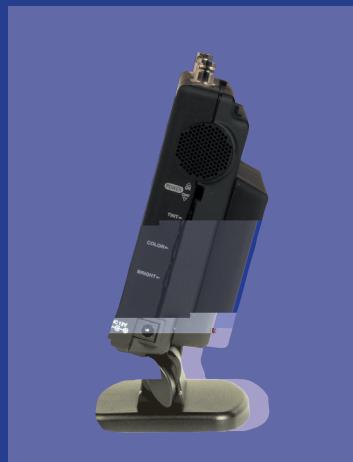

## MODEL NUMBERS

LCD-565 Monitor with BNC/No Audio

LCD-562 Monitor with Audio

## DESCRIPTION

LCD-565 only: BNC IN/OUT jacks located on top for easy access (with self-termination feature)

LED backlight provides longer life, uses less power and provides better color saturation

Battery pack for field monitor use included

Ideal for troubleshooting system setup/fault location

Switch for Auto/Manual color adjustment

Low power consumption

Case made of durable ABS plastic

Manual controls for tint, color, brightness (and audio volume for LCD-562)

Battery pack provides approximately 5 ~ 6 hrs operation

Snap-on battery pack holds 8AA or 10 NiCad rechargeable batteries (batteries not included)

LCD-562: 5.6" field monitor with audio (no bnc in/out)

LCD-562KIT: 5.6" field kit with audio (no bnc in/out) with clip-on battery pack, tote bag, and AC adaptor

LCD-565KIT: 5.6" field kit with bnc in/out with clip-on battery pack, tote bag, and AC adaptor

Response Time: 60ns/60ns (Rising/Falling)

## OPTIONAL ACCESSORIES

AC-2000 AC adaptor

BP-563 Rechargeable 2200mh NiCad battery pack  
Provides approximately 6 hrs. operation.

DC-12 Car cord

DC-12D Dual car cord

HS-1 Hot Shoe mount

MB-1 Desk Stand (shown above in side view)

MB-72M Metal Mounting Bracket

TB-565 Custom Totebag with sun shield

WM-1 Wall mount bracket

For Rechargeable Battery Pack order part # BP-563 to go in TB-565 tote bag

GSA Schedule GS-07F-0069L, SIN: 246-42(1), 246-50

## SPECIFICATIONS (LCD-565)

Brightness Rating	200 cd/m <sup>2</sup> (Nit)
Dot Pitch	0.188mm(H) x 0.362mm(V)
Dot Format	960(H) x 234(V) dots
Contrast Ratio	300:1
Display	5.6" a-Si TFT LCD active matrix
Back Light	LED
Input Signal	NTSC/PAL (automatically match)
Number of Pixels	224,640 Dots
Pixel Configuration	RGB Stripe
Input Signal Level	1.0V P-P (positive) 75 Ohm
Viewing angle (L/R/T/B)	65°/65°/45°/65°
Dimensions w/pack (WHD)	158 x 130 x 55mm/6.2" x 5.1" x 2.2"
Dimensions w/o pack (WHD)	158 x 130 x 42mm / 6.2" x 5.1" x 1.7"
Monitor Mounting	Mounting pad with 1/4 - 20 threaded socket
Actual Visible screen size (WH)	113.3 x 85mm / 4.5" x 3.3"
Operating temperature	10~104°F or 12~40°C
Storage temperature	-13 ~ 140°F or -25 ~ 60°C
Power Requirement / Consumption	11VDC ~ 14VDC, 500mA, +pin, - ground 4.0 W (340mA @ DC 12V)
Connections	<b>LCD-565</b> BNC video IN/OUT (female) jacks 2.1mm DC IN jack <b>LCD-562</b> 3.5mm A/V IN/OUT jacks with cables, 2.1mm DC IN jack with cable

Weight **LCD-565** Net 400g/14.0 oz **Gross** 0.6 kg/1.3 lbs**LCD-562** Net 400g/14.0 oz **Gross** 0.7 kg/1.6 lbs