


LCD-1901HDL - Front



LCD-1901HDL - Back

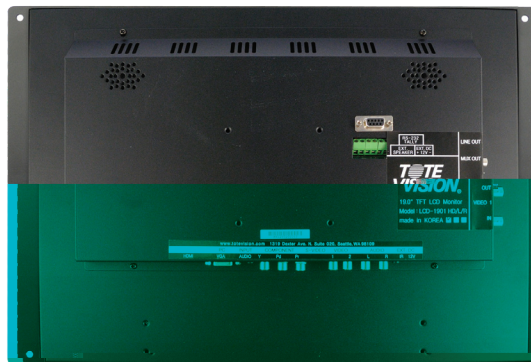

LCD-1901HDL Flush Mount Monitor

A versatile, high-definition, mid-size monitor that is effective for any commercial video use.

Benefits

- Displays HD signals (1080p/i and 720p)
- Widescreen (16:9) native aspect ratio
- Durable black steel case
- Built-in speakers
- Under scan capability
- RS-232 control
- IR remote control
- Blue gun color calibration feature
- Composite BNC in/out for looping

Accessories

Related Products

- LCD-1901HD
- LCD-1901HDR

Specifications	
Mount	Flush Mount
HD Compatible	Yes
Anti Glare Coating	Yes
Selected Color Temp.	No
Case	Metal
Built-in Power Supply	No
IR Remote Control	Yes
180° Rotation Display	No
Native Aspect Ratio	16:9
Visible Screen Size (WH)	412 x 258mm / 16.2" x 10.1"
Resolution	1440(H) x 900(V) dots
Brightness Rating	300 cd/m ² (Nit)
Contrast Ratio	800:1
Back Light	CCFT (50 K)
PC Compatibility	Yes
Dot Pitch	0.285(H) x 0.285(V)mm
Colors	8-bit, 16.2M
Number of Pixels	1,024,000
Response Time	5ms (Rising/Falling)
Audio Power / Speakers	8 ohm, 5 W, 28 x 40mm oval type x 2
Viewing Angle (L/R/T/B)	80/80/80/80 degrees
Pixel Configuration	Stripe
Input Signal Level	1.0V P-P (positive) 75 Ohm
Dimensions w/ Deskstand	
Dimensions w/o Deskstand	480 x 326 x 50mm / 18.9" x 12.8" x 1.97"
Operating Temp/Humidity	6 ~ 104°F / -14 ~ 40°C
Power Requirements	Regulated 12VDC, 3A, negative ground Part No. DC-1500 required for use in vehicles
Power Consumption	9.6W (max)
Component	RCA y/Pb/Pr jacks
Composite	BNC video IN/OUT, and RCA video IN x 2
RoHS Compliant	Yes
S-Video	IN jack
PC	15-pin mini D-sub
HDMI / DVI / RS-232	Yes / No / 9-pin
Audio	2 RCA IN jacks and 3.5 stereo audio OUT jack
Power	2.5mm DC IN jack
Weight	Net 4.9 kg / 10.9 lbs Gross 6.1kg / 13.5lbs
Installer's Cut Out	18" x 12 1/16"
GSA	Yes