

# IQeye Alliance-pro

## H.264 Megapixel IP Dome Camera


### Features

- Resolutions up to 5 MP
- H.264 Main profile + MJPEG Compression
- 60 fps @ 720p, 30 fps @ 1080p, 10 fps @ 5 MP
- Remote Zoom and Focus for Easy Installation\*
- 1, 2 & 3MP WDR Models Available
- Continuous Analog Video Output
- Two-Way Audio
- True Day/Night Movable IR Filter
- exacqVision® Edge and Agent Vi® Compatible
- On-Camera Storage
- IP66/NEMA 4 Outdoor Enclosure
- Direct-to-Storage (DTS)
- 5 Year Warranty (3 years on auto-focus models)

The Alliance-pro is a full featured, multi-megapixel H.264 Main Profile vandal dome camera. With support for up to 5MP resolutions, this camera provides multiple, individually configured H.264 and simultaneous MJPEG streams. Designed with the installer in mind, installation is quick and easy thanks to the remote motorized zoom and focus\* (eliminating the need for manual focus adjustments at the camera), a hinged pivoting shroud, and 3-axis gimbal.

The Alliance-pro can be installed virtually anywhere using Power-over-Ethernet or AC or DC power and supports a movable IR filter for true day and night operation as well as controls for optimizing video for any lighting condition. Two-way audio allows for interactive communication between the camera and monitoring site. The external on camera micro SDHC memory expansion port in combination with IQrecorder, or Direct-To-Storage recording, make the Alliance-pro a flexible stand-alone platform ideal for motion based recording or remote monitoring.

\*With A2 & A3 lens options

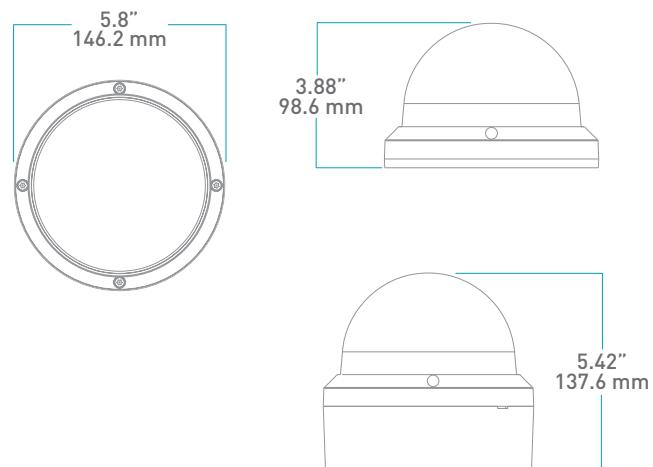

**IQ inVision** 

33122 Valle Road  
San Juan Capistrano, CA  
92675-4853  
USA

toll free within US 877.850.0805  
phone +1.949.369.8100  
fax +1.949.369.8105

[www.iqeye.com](http://www.iqeye.com)

# IQeye Alliance-pro

## H.264 Megapixel IP Dome Camera



H.264 and MJPEG	TCP/IP, HTTP, HTTPS, DHCP, UDP, RTP, RTSP, DNS, ARP, ICMP, NTP, UPnP, ZeroConf, APIPA, UDP multicast, SNMP, FTP, SMTP, Telnet, CIFS
Main	Secure Multi-level
1/3" CMOS, 1/2.5" CMOS for 5 MP	
User Configurable	
Auto/Programmable/Fixed	Power over Ethernet 802.3af Class 1, Class 2 (NX)
Saturation, Contrast, Brightness, Sharpness, Lightgrabber™ II, IQnightlight	24 VAC, 12-24 VDC
User Configurable	< 3.4 W (typical)
Auto/Programmable	< 5.2W NX (typical)
Auto	50 Hz/60 Hz Selectable
800 to 940 nm	RJ45 10Base-T/100Base-TX
User Configurable Windows	1 input, 1 output
User Configurable Windows	Mic in/Line in, Line out
User Configurable	Micro SD Class 6+ (card not included - up to 32GB)
User Configurable	A class 10 or better SDHC memory card is required when edge server applications are running on the camera.
180, Horizontal, Vertical	
Auto focus varifocal lenses w/ remote zoom & one-touch focus	
Service Port & Continuous (NTSC / PAL)	IP66, NEMA 4 (NE/NX)
Two-way G.711 PCM 8 kHz	IK10
Yes	FCC, CE, UL, cUL
IQaccess, IQrecorder, IQfinder, IQevent, IQmanager, Direct-to-Storage (DTS)	-4° F to 122° F, -20° C to 50° C
exacqVision® Edge, Agent Vi® (SW Licence Required)	-22° F to 122° F, -30° C to 50° C (NX)
	746 g (NI), 1186 g (NE), 1193 g (NX)
	5 years (3 years on auto-focus lens models)
	A2 Auto Focus Wide Angle Lens 1/3" φ14, 9-22mm, F1.5, IR
	A3 Auto Focus Wide Angle Lens 1/2.7" φ14, 3-8mm, F1.5, IR
	B5 Wide Angle Lens 1/3" M14, 3-13 mm, F1.4, IR
	B6 Wide Angle Lens 1/2.5" M14, 3.3-12 mm, F1.4, IR
IQA30Nx-B5	IQAE-BOX
IQA31Nx-B5, IQA31Nx-A2, IQA31Nx-A3	IQA-WM
IQA31Wx-B5, IQA31Wx-A2, IQA31Wx-A3	IQA-SS
IQA32Nx-B5, IQA32Nx-A2, IQA32Nx-A3, IQA32Wx-B5, IQA32Wx-A2, IQA32Wx-A3	IQ800-PMA
	Back Box
	Wall Mount Adaptor
	Alliance-pro Sun Shield
	Pole Mount Adaptor

\*With A2 & A3 lens options

IQA30Nx-B5	SD480p - 720 x 480	30 fps	Color: 0.1 lux, B/W: <0.05 lux
IQA31Nx-B5, IQA31Nx-A2, IQA31Nx-A3	HD720p - 1280 x 720	60 fps	Color: 0.1 lux, B/W: <0.05 lux
IQA31Wx-B5, IQA31Wx-A2, IQA31Wx-A3	HD720p - 1280 x 720	60 fps	Color: 0.2 lux, B/W: <0.05 lux
IQA32Nx-B5, IQA32Nx-A2, IQA32Nx-A3, IQA32Wx-B5, IQA32Wx-A2, IQA32Wx-A3	HD1080p - 1920 x 1080	30 fps	Color: 0.2 lux, B/W: <0.05 lux
IQA33Nx-B5	3.6 MP - 2560 x 1440 3.1 MP - 2048 x 1536	16 fps 20 fps	Color: 0.3 lux, B/W: <0.05 lux
IQA33Wx-B5, IQA33Nx-A3	3.1 MP - 2048 x 1536	20 fps	Color: 0.2 lux, B/W: <0.05 lux
IQA35Nx-A3, IQA35Nx-B6	5 MP - 2560 x 1920	10 fps	Color: 0.3 lux, B/W: <0.05 lux