


VZ-55UNL ADVANTAGES

- 55" 1080p CCTV LED Monitor
- Ultra Narrow 3mm Metal Bezel
- Video Wall Construction - Active to Active Bezel Width 5.9 mm
- OSD Function Control through RJ-45 protocol
- Digital & Analog Inputs, 3-Year Warranty
- Image Rotation Feature Prevents "Pixel Burn-In"

DIMENSIONS

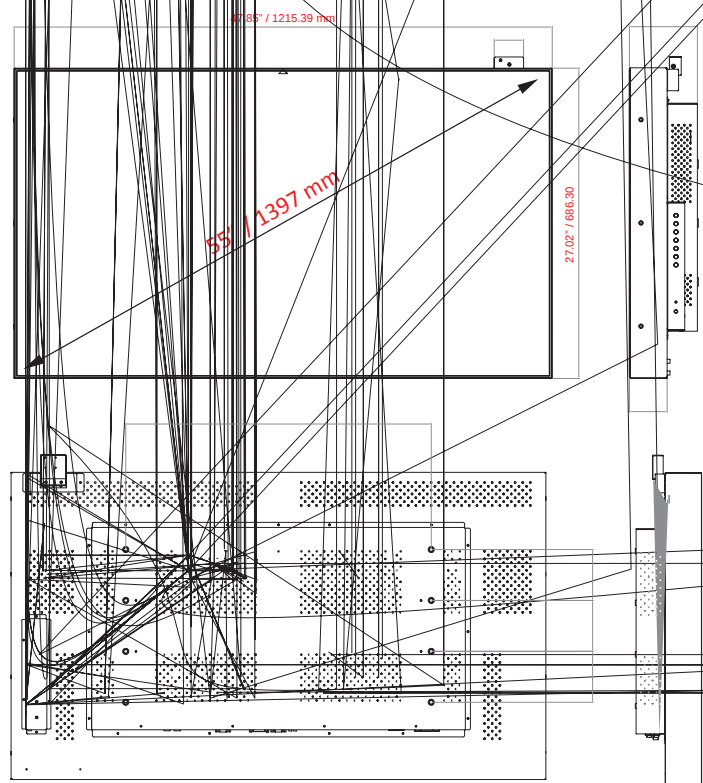

INTERFACE

1. AC 110V IN
2. RJ-45 IN
3. PC STEREO IN/OUT
4. VGA IN
5. DVI-D IN
6. HDMI IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

INTERFACE

VGA In (15Pin D-Sub)	1
DVI-D In	1
HDMI In	1
RJ-45 In	1
PC Stereo In / Out	1 / 1

AUDIO

Built in speaker	2W X 2
------------------	--------

SPECIAL FEATURES

Bezel Width	TOP and LEFT Side	0.118" / 3 mm
	BOTTOM and RIGHT Side	0.114" / 2.9 mm
	ACTIVE AREA to ACTIVE AREA	0.232" / 5.9 mm
RS-232 / RJ-45 Control Program	Monitor OSD	
Image Rotation	YES	
Rotate IR receiver	YES	
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch	

DIMENSIONS & WEIGHT

Outline Dimension (W x H x D)	47.85" x 27.02" x 5.50" (1215.99mm x 686.30mm x 139.70mm)
Net Weight	41.5kg / 91.49 lbs

MOUNT

VESA	600 x 100 x 100 x 100mm, M8x12 Screws
------	---------------------------------------

GENERAL

Transmitter - IR Remote Control	YES
Power	Electrical Ratings AC100 ~ 240V(50/60Hz) Consumption 330 W
Warranty	Parts/ Labor 3 Year / 3 Year MTBF (Approx.) 50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Compatible Mounts	VZ-XM55