

Section 8 COMMERCIAL SADDLE THRESHOLDS

Standard Sizes (Product is cut oversize to allow "cutting in"): 30", 32", 36", 42", 48" (**cut 3/8" over**); 60", 64", 72" (**cut 1" over**).
Other lengths are available (Extra cost over 73").

Routed thresholds (page 33) and specified lengths are cut exact.
 Center holes are counter-sunk.
#10 phillips flathead screws of appropriate length are included.
 Nominal min. wall thickness 1/8"
 Tabs avail. for 1/2" saddles. (page 33)


Special anchors may be required on concrete slab construction & are available at extra cost, see page 34.



Barrier free design meets ADA requirements.

1503 A, B


10 x 1" phillips flathead screws are included.

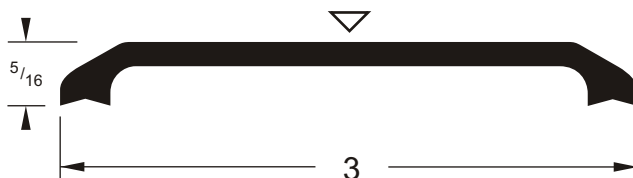


1/2" COMMERCIAL SADDLE THRESHOLDS

10 X 1-1/2" phillips flathead screws are included with parts 1504 - 1507


1504 A, B

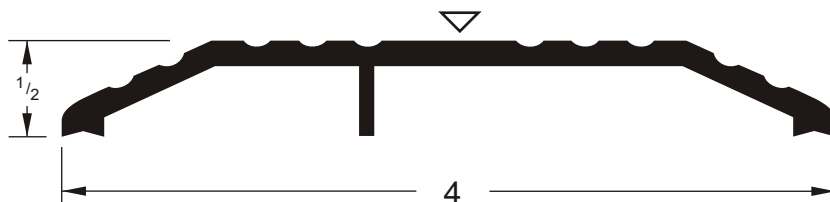

1505 A, B

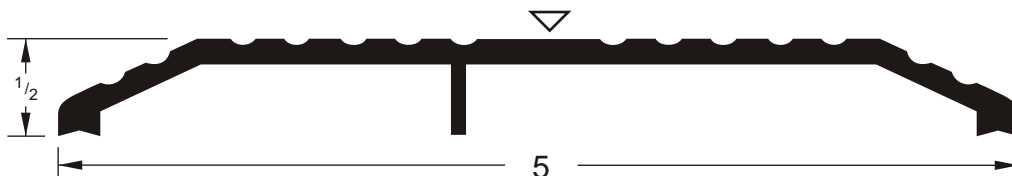

1506 A, B

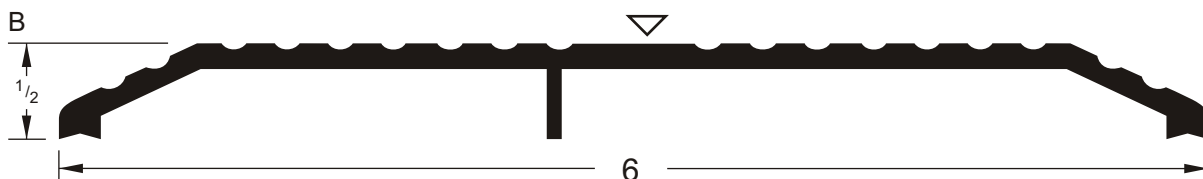

1507 A, B

