

PIN TUMBLER DEADBOLT LOCKS




Deadbolt Locks For Drawers Surface Mounted

CompX
NATIONAL

- Requires 57/64" diameter hole for cylinder.
- Key required to engage lock and is removable in both locked and unlocked positions.
- All are ANSI/BHMA certified Grade 2 A156.11.
- Supplied with two keys, strike and mounting screws.
- If trim ring is required, see NLC2017 Series on page D-28.
- Stock Keying is specified on table below:
 - KA = All Keyed Alike to key number specified, master key will not work on these locks.
 - KD = All Keyed Different, various lock numbers, master key will not work on these locks.

Packing: 10 each per box.


Sold in: Both broken and full box quantities. Discount available for full box orders.

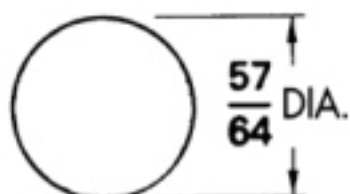

Bore hole requirement

Keying	Cylinder Length	Bolt Travel	Satin Brass Item #	Satin Chrome Item #
KA 101	7/8"	3/4"	-	NLC8178KA101-26D
KA 107	7/8"	3/4"	-	NLC8178KA107-26D
KA 915	7/8"	3/4"	NLC8178KA915-4	NLC8178KA915-26D
KD	7/8"	3/4"	-	NLC8178KD-26D
KA 915	1-1/8"	3/4"	-	NLC8177KA915-26D
KA 101	1-3/8"	3/4"	-	NLC8179KA101-26D
KA 107	1-3/8"	3/4"	-	NLC8179KA107-26D
KA 915	1-3/8"	3/4"	-	NLC8179KA915-26D

Applications:

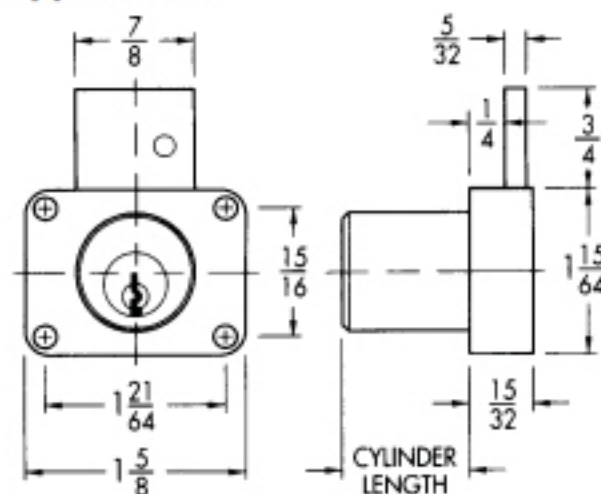

Re-Keying Made Easy
ADVANTAGETM
+PLUS

Feature makes key changes easier by allowing you to remove the cylinder while the lock remains in place with a 5/64" allen wrench - no mounting screws need to be removed.

