

Options & Accessories

ML20800 AC2 Mortise Lock

Access
800 | AC2


Strikes

ANSI Straight Lip (standard)

Brass, Bronze or Stainless Steel

Non-handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8"
(29mm) lip to center
Optional lip lengths: 7/8" (22mm), 1-1/4"
(32mm), 1-3/8" (35mm), 1-1/2" (38mm),
1-3/4" (44mm), 2" (51mm),
2-1/4" (57mm), 2-1/2" (64mm), 2-3/4"
(70mm), 3" (76mm)



ANSI Curved Lip

Brass, Bronze or Stainless Steel

Handed 4-7/8" (124mm) x 1-1/4" (32mm) x
1-1/4" (32mm) lip to center
Optional lip lengths: 1-3/8" (35mm), 1-1/2"
(38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4"
(57mm), 2-1/2" (64mm), 2-3/4" (70mm),
3" (76mm)

ANSI Wrought Strike Box


To order with lockset; see Quick Codes, page 17. To order separately, specify 120F768.

		Part No.	Description
Latchbolt X Deadbolt		236L72	Straight Lip
		340L60	Curved Lip for RH, LHR
		340L61	Curved Lip for LH, RHR
Latchbolt Only		236L73	Straight Lip
		340L62	Curved Lip for RH, LHR
		340L63	Curved Lip for LH, RHR

To order strike with lockset, see Quick Codes, page 17. To order strike separately, specify Part No. x Lip Length x Finish (e.g., 340L60 x 1-1/2" x 626).


Open Back

Size: 5-1/4" (133mm) x 1-1/4" (32mm)



Hand	Door Thickness	Part
LHL	1-3/4" (44mm)	411L63016
	2" (51mm)	411L63018
	2-1/4" (57mm)	411L63020
RHR	1-3/4" (44mm)	411L62016
	2" (51mm)	411L62018
	2-1/4" (57mm)	411L62020

To order with lockset; see Quick Codes, pg. 17.
To order separately, specify Part No. x Door Thickness x Finish (e.g., 411L62 x 2" x 626).



Rabbeted Front and Strike

Brass or bronze. For 1/2" (13mm) rabbet.
No optional lip lengths.

	Part No.	Hand
Latchbolt x deadbolt	318F66	RH/LHR
	318F69	LH/RHR
Latchbolt only	318F64	RH/LHR
	318F67	LH/RHR

To order with lockset; see Quick Codes, page 17.
To order separately, specify Part No. x Finish (e.g., 318F66 x 626).

Quick Codes

Access 800[®] | AC2

ML20800 AC2 Mortise Lock

Cylinders and Keying

Description	Specify
Conventional 6-pin	(standard)
Conventional 7-pin	7P
Less Cylinder(s)	LC
IC 6-pin	C6
IC 6-pin with Temporary Construction Core	
Red	CT6R
Blue	CT6B
Green	CT6G
CI 6-pin Less Core	CL6
SFIC 6-pin with Less Core	CLS6
SFIC 6-pin with SFIC disposable temporary core	CT6SD
IC 7-pin	C7
IC 7-pin with Temporary Construction Core	
Red	CT7R
Blue	CT7B
Green	CT7G
IC 7-pin Less Core	CL7
SFIC 7-pin with Less Core	CLS7
SFIC 7-pin with SFIC disposable temporary core	CT7SD
Security	HS
Security IC	CHS
Pyramid Fixed Core	PHS
Pyramid IC	PCHS
Pyramid IC Less Core	CLP
Pyramid with Temporary Construction Core	CTP
Pyramid Security	PS
Pyramid Security IC	PCS
Pyramid Disposable Core	CTPD
6-pin Disposable Core	CT6D
7-pin Disposable Core	CT7D
Keyed Random (Standard) 45014-2/14	KR
Construction Master Eyed (not available for Pyramid)	CMK
Visual Key Control	
- No Keying Data Stamped on Key or Cylinder	VKC0
- Keys Only	VKC1
- Cylinders and Keys (not for HS, CHS, PHS or PCHS)	VKC2
- Cylinders Only (not for HS, CHS, PHS or PCHS)	VKC3

Cylinders and Keying (Cont.)

Description	Specify
Concealed Key Control (CKC)	
- CKC Cylinders with VKC Keys	CKC2
- CKC Cylinders Only (not for PHS, PCHS)	CKC3
2 Keys per Lock	(standard)
	KY#
More than 2 Keys	(e.g., KY6)
Finish	
Description	Specify
Polished Brass, Clear Coated	605
Satin Brass, Clear Coated	606
Polished Bronze, Clear Coated	611
Satin Bronze, Clear Coated	612
Dark Oxidized Satin Bronze, Oil Rubbed	613
Dark Oxidized Satin Bronze - Equivalent	613E
Dark Oxidized Satin Bronze, Clear Coated	613L
Polished Nickel	618
Satin Nickel	619
Polished Chrome	625
Satin Chrome	626
Satin Chrome with MicroShield®	626C
Black Oxidized Bronze, Oil Rubbed	722

Miscellaneous Options

Description	Specify
Torx® head screws	M04
ANSI wrought strike box	M17
Knurling outside and inside*	M20
Knurling outside only*	M21
Knurling inside only	M22
Abrasive coat outside and inside*	M23
Abrasive coat inside only*	M24
Abrasive coat outside only	M25
Power/Remote Unlocking Harness	M35
Forced/Propped Door**	M861

*not available with Vineyard or Museo levers.

**not compatible with M800

Door Thickness

Door Thickness	Specify
1-3/4" (44mm)	(standard)
2" (51mm)	D200
2-1/4" (57mm)	D214

Credential Quick Codes

Description	Specify
Credential for 100 User	
Keypad Only	M800
Credentials for 2000 User	
Keypad Only	M801
Prox Only	M802
Keypad/Prox	M803
Keypad/RF	M804
Prox/RF	M805
Keypad/Prox/RF	M806

Strikes

ANSI Lip to Center	ANSI Straight Lip Specify	Curved Lip Specify
7/8" (22mm)	SS078	N/A
1-1/8" (29mm)	(standard)	N/A
1-1/4" (32mm)	SS114	SA114
1-3/8" (35mm)	SS138	SA138
1-1/2" (38mm)	SS112	SA112
1-3/4" (44mm)	SS134	SA134
2" (51mm)	SS200	SA200
2-1/4" (57mm)	SS214	SA214
2-1/2" (64mm)	SS212	SA212
2-3/4" (70mm)	SS234	SA234
3" (76mm)	SS300	SA300
Open Back Strike	Door Thickness	Specify
	1-3/4" (44mm)	SB134
	2" (51mm)	SB200
	2-1/4" (57mm)	SB214
Rabbeted front and strike - Specify		SR118

Handing


Hand	Specify
Right Hand	RH
Left Hand	LH
Right Hand Reverse	RHR
Left Hand Reverse	LHR

Options & Accessories

CL33800 AC2 Cylindrical Lock

Access
800 | AC2


Strikes



ANSI Curved Lip (standard)

Brass or stainless steel,
4-7/8" (124mm) x 1-1/4" (32mm) x
1-1/4" (32mm) lip to center.
Optional lip lengths: 1" (25mm),
1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm),
1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm),
2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm).


To order with lockset, see Quick Codes on page 22.
To order separately, specify 217L13 x
Lip Length x Finish.



Curved Lip Box

Brass, 2-3/4" (70mm) x 1-1/8" (29mm)
x 1-1/4" (32mm) lip to center.
Optional lip lengths: 1" (25mm), 1-1/8" (29mm),
1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm),
2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm),
2-3/4" (70mm), 3" (76mm).


To order with lockset, see Quick Codes on page 22.
To order separately, specify 586L19 x
Lip Length x Finish.



Rabbeted Front and Strike

Brass, 4" (102mm) x 5/8"
(16mm) for 1/2" (13mm) rabbet.
No optional lip lengths.

To order with lockset, see Quick Codes
on page 22.
To order separately, specify 601F28
x Finish.



ANSI Wrought Strike Box

To order with lockset, see Quick Codes on page 22.
To order separately, specify 120F768.


Electrified Accessories

Description	Specify
Power Supply, 9VDC	
Output Operates 2 each	
Access 800 locks	784

Option & Accessories


ED5000 x 9800/9M800 AC2 Exit Device

Access
800 | AC2



SecureBolt® and Fire-Rated Rim Strike and Rim Strike

Standard on ED5200S, ED5200SA, ED5200A and ED5200 devices. Supplied with locking plate and two 1/16" (1.6mm) shims. For doors with 1/2" (13mm) or 5/8" (16mm) stop. Adjustable to compensate for shrinkage and swelling of door. 3-1/2" x 1-1/4" (99mm x 32mm). Black finish only. To order separately specify 650F30-8.



Mortise Strikes


Mortise Strike

Standard on ED5600(A) Series. Non-handed, ANSI curved lip, 4-7/8" x 1-1/4" x 1-1/4" (124mm x 32mm x 32mm) lip to center. To order separately, specify 650L657020.



Mortise Strike for Pairs of Doors with Astragal


Optional for use with ED5600(A) Series devices where an astragal is to be installed. Non-handed, ANSI straight lip, 4-7/8" x 1-1/4" x 7/8" (124mm x 32mm x 22mm) lip to center. To order with exit device, specify SS078. To order separately, specify 653L157014.



Open Back Strike


Optional for use with ED5600 x vertical rod devices on a pair of doors. Non-handed, 4-7/8" x 1-1/4" (124mm x 32mm). To order with exit device, specify SB134 for 1-3/4" doors, SB214 for 2-1/4" doors. To order separately, specify Part No. listed below.

Door Thickness	Type	Part No.
1-3/4" (44mm)	Curved lip	653L183016
	Straight lip	653L163016
2-1/4" (57mm)	Curved lip	653L183020
	Straight lip	653L163020



Mortise Strike

Standard on ED5600 and ED5600(A) devices on 2" (51mm) (D200) and 2-1/4" (57mm) (D214) thick doors. Handed ANSI curved lip, 4-7/8" x 1-1/4" x 1-1/2" (124mm x 32mm x 38mm) lip to center. To order separately, specify 656L677024 for RH, 656L687024 for LH.



ANSI Wrought Strike Box

Optional for use with ED5600 and ED5600A devices. To order with exit device, specify M17. To order separately, specify 120F76-8.



Filler Plates

Optional for use on stock metal doors when required. To order, specify 334F99-8 600.



Optional for use on stock metal doors when required. To order, specify 236L708018 x Fin.




Optional for use on stock metal doors when required. To order, specify 077F19-8 600.

Deadlocks DL2200/DL3200 Series

Padlocks & Deadlocks

Features

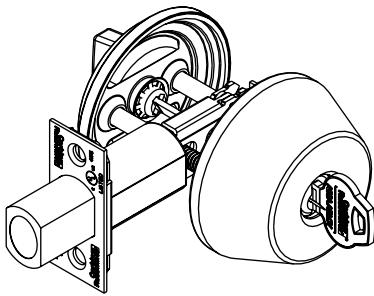

Handing Non-handed.

Door Thickness Standard: 1-3/4" (44mm). Optional door thicknesses available; see Quick Codes.

Backset Standard: 2-3/4" (70mm). Optional: 2-3/8" (60mm)

Front Standard: brass or stainless steel, 2-1/4" (57mm) x 1-1/8" (29mm). Optional: 1" width; see Quick Codes.

Deadbolt 1" throw, solid steel deadbolt with hardened, free spinning, steel pin insert.

Strike Standard: 2-3/4" (70mm) x 1-1/8" (29mm). Optional strikes and wrought boxes available; see Strikes, this page.

Cylinder Standard: brass, 6-pin, L4 keyway, 0-bitted. Security cylinder optional; see Quick Codes.

Keys Two nickel silver standard.

Keying Features Available

Master keying
Construction master keying
Security
Visual key control
Concealed key control

Warranty One-year limited.

Certification/Compliance

UL

UL10B/UL10C Fire Rated Auxiliary Lock for A label and lesser class doors when used with a correspondingly rated primary latching device.

ANSI

DL2200 - 156.5 Grade 2
DL3200 - 156.5 Grade 1

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire-rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

Functions


Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		DL2213 DL3213	Single Cylinder	E0150 Series	- By key outside and by thumbturn inside.
		DL2212 DL3212	Double Cylinder	E0140 Series	- By key either side.
	ONLY	DL2217 DL3217	Classroom	E0170 Series	- By key outside and by thumbturn inside. - Thumbturn will retract but not project deadbolt.
		DL2211 DL3211	Cylinder x Blank	E0160 Series	- By key one side only; opposite side blank.
		DL2260 DL3260	Thumbturn x Blank	E0190 Series	- By thumbturn one side only; opposite side blank.

Strikes




Metal Frame Strike

Standard
2-3/4" (70mm) x 1-1/8" (29mm).
To order separately, specify
781F568 x Finish



Wood Frame Strike

Standard
2-3/4" (70mm) x 1-1/8" (29mm).
To order separately, specify
781F558 x Finish.



Strike Box

Standard with standard strikes.
To order separately, specify
781F599.



ANSI Strike

Optional; see Quick Codes.
To order separately, specify
423L71 x Finish.



ANSI Wrought Strike Box

Optional for use with ANSI
strike; see Quick Codes. To order
separately, specify 120F768.

Deadlocks DL3000 Series

Padlocks & Deadlocks

Features



Handing

Non-handed, except DL3017, which is handed and field reversible.

Door Thickness

Standard: 1-3/4" (44mm) - 2-1/4" (57mm).
Optional door thicknesses available; see Quick Codes.

Backset

Standard: 2-3/4" (70mm)
Optional: 2-3/8" (60mm)

Front

Standard: wrought brass or bronze, 2-1/4" (57mm) x 1-1/8" (29mm).
Accommodates flat doors and doors beveled 1/8" (3mm) in 2" (51mm).

Deadbolt

Zinc diecast hardened steel insert. 1" (25mm) throw, 5/8" (16mm) wide x 3/4" (19mm) high.

Strike

Standard; 2-3/4" (70mm) x 1-1/8" (29mm).
Optional strikes and wrought boxes available; see Strikes, this page.

Cylinder

Brass, 6-pin, L4 keyway, 0-bitted. Security cylinders optional; see Quick Codes.

Keys

Two nickel silver standard.





Keying Features Available

Master keying
Construction master keying
7-pin (FC) conventional
Interchangeable core (IC)
Security
Security (IC)
Visual key control
Concealed key control
Pyramid (FC)
Pyramid (IC)


Warranty

One-year limited.

Functions


Outside	Inside	Series/ Function	Type	ANSI No.	Function Description
		DL3013	Single Cylinder	E0150 Series	- By key outside and by thumbturn inside.
		DL3012	Double Cylinder	E0140 Series	- By key either side.
	ONLY	DL3017	Classroom	E0170 Series	- By key outside and by thumbturn inside. - Thumbturn will retract but not project deadbolt.
		DL3011	Cylinder x Blank	E0160 Series	- By key one side only; opposite side blank.
		DL3060	Thumbturn x Blank	E0190 Series	- By thumbturn one side; opposite side blank.

Strikes




Standard Strike

2-3/4" (70mm) x 1-1/8" (29mm).
To order separately, specify 424F83 x Finish.



ANSI Strike

Optional; see Quick Codes.
To order separately, specify 423L71 x Finish.




Wrought Strike Box

Standard with Standard Strike.
To order separately, specify 496F71-8.



ANSI Wrought Strike Box

Optional for use with ANSI Strike; see Quick Codes.
To order separately, specify 120F76-8.




Optional Strike

3-1/2" (89mm) x 1-1/8" (29mm); see Quick Codes.
To order separately, specify 394F19 x Finish.

Deadlocks DL4100 Series

Padlocks & Deadlocks

Features



Handing

Non-handed.

Door Thickness

Standard: 1-3/4" (44mm). Optional door thicknesses available; see Quick Codes.

Backset

2-3/4" (70mm).

Lockcase

Heavy wrought steel; zinc dichromate finish.

Front

Brass, bronze, stainless steel.

4-5/8" (117mm) x 1-1/8" (29mm).

Adjustable for flat or beveled doors (bevel adjustment 1/8"(3mm) in 2"(51mm).

Functions

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
		DL4113	Single Cylinder	E6070 Series	- By key outside and by thumbturn inside.
		DL4112	Double Cylinder	E6060 Series	- By key either side.
		DL4117	Classroom	E6090 Series	- By key outside and by thumbturn inside. - Thumbturn will retract but not project deadbolt.
		DL4111	Cylinder x Blank	E6080 Series	- By key one side only; opposite side blank.
		DL4122	Double Cylinder x Thumbturn	—	- By key either side and by thumbturn inside. - Thumbturn will retract but not project deadbolt.
		DL4160	Thumbturn x Blank	—	- By thumbturn inside only; opposite side blank.

Deadbolt

Steel with hardened pin; 1" (25mm) throw.

Strike

Standard: wrought brass or bronze, 3-1/2" (89mm) x 1-1/8" (29mm). Optional strikes available; see Strikes, this page.

Cylinder

6-pin, L4 keyway, 0-bitted. Security cylinder optional; see Quick Codes.

Keys

Two nickel silver standard.

Keying Features Available

Master keying
Construction master keying
7-pin (FC) conventional
Interchangeable core (IC)
Security
Security (IC)
Visual key control
Concealed key control
Pyramid (FC)
Pyramid (IC)

Warranty

One-year limited.

Certification/Compliance

UL

Listed for use on fire doors.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire-rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

Strikes

Standard Strike

3-1/2" (89mm) x 1-1/8" (29mm). To order separately, specify 796F34 x Finish.



Strike Box


Optional with Standard Strike; see Quick Codes.

To order separately, specify 466F27-9.



ANSI Strike

Optional; see Quick Codes. To order separately, specify 240L08 x Finish.



ANSI Wrought Strike Box


Optional for use with ANSI Strike; see Quick Codes. To order separately, specify 120F76-8.



Options & Accessories

CL3100

Strikes




ANSI Curved Lip (standard)

Brass or stainless steel.

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center.

Optional lip lengths: 1" (25mm), 1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm).

To order separately, specify
217L13 x Lip Length x Finish.



Curved Lip "T" Strike (option)

Brass.

2-3/4" (70mm) x 1-1/8" (29mm) x 1-1/4" (32mm) lip to center

Optional lip lengths: 1" (25mm), 1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

To order optional strike with lockset, see Quick Codes, page 12.

To order separately, specify 586L19 x Lip Length x Finish.



ANSI Wrought Strike Box


To order with lockset, see Quick Codes, page 13.

To order separately, specify 120F76-8.

Options & Accessories

CL3300

Strikes




ANSI Curved Lip (standard)

Brass or stainless steel.

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center.

Optional lip lengths: 1" (25mm), 1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm).

To order separately, specify 217L13 x Lip Length x Finish.



Rabbeted Front and Strike


Brass or bronze.

4" (102mm) x 5/8" (16mm) for 1/2" (13mm) rabbet.

No optional lip lengths.

To order with lockset, see Quick Codes, page 16.

To order separately, specify 601F28 x Finish.



Curved Lip "T" Strike

Brass.

2-3/4" (70mm) x 1-1/8" (29mm) x 1-1/4" (32mm) lip to center.

Optional lip lengths: 1" (25mm), 1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm).

To order with lockset, see Quick Codes, page 16.

To order separately, specify 586L19 x Lip Length x Finish.



ANSI Wrought Strike Box

To order with lockset, see Quick Codes, page 17.

To order separately, specify 120F76-8.


Options & Accessories

CL3500


Latches

To order optional latchbolt with lockset, see How to Order, page 9.
To order latchbolt separately, specify Part No. x Finish (e.g., 599F91 x 626).

Backset and Front Description		Plain	Deadlocking	Throw-Off
2-3/8" Backset	1" width, square corner	599F91	599F92	599F93
	1" width, rounded corner	599F94	599F95	599F96
	1-1/8" width, square corner	599F97	599F98	599F99
	1-1/8" width, rounded corner	600F00	600F01	600F02
2-3/4" Backset	1" width, square corner	600F03	600F04	600F05
	1" width, rounded corner	600F06	600F07	600F08
	1-1/8" width, square corner	600F09	600F10	600F11
	1-1/8" width, rounded corner	600F12	600F13	600F14
3-3/4" Backset	1-1/8" width, square corner	600F62	600F63	600F64
	1-1/8" width, rounded corner	600F65	600F66	600F67
5" Backset	1-1/8" width, square corner	600F68	600F69	600F70
	1-1/8" width, rounded corner	600F71	600F72	600F73




Plain (CL3510) Deadlocking (All other functions)



Throw-Off (CL3520)


Housing diameter 7/8" for all models. 1" diameter latch sleeve furnished with each latchbolt.

Strikes




ANSI Curved Lip (standard)

Brass or stainless steel.
4-7/8" x 1-1/4" x 1-1/4" lip to center.
Optional lip lengths: 1", 1-1/8",
1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2", 2-3/4", 3".
To order separately, specify 217L13 x Lip Length x Finish.




Curved Lip "T" Strike

Brass.
2-3/4" x 1-1/8" x 1-1/4" lip to center.
Optional lip lengths: 1", 1-1/8",
1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2",
2-3/4", 3".
To order with lockset, see How to Order, page 9.
To order separately, specify 586L19 x Lip Length x Finish.




Rabbeted Front and Strike

Brass or bronze.
4" x 5/8" for 1/2" rabbet.
No optional lip lengths.
To order with lockset, see How to Order, page 9.
To order separately, specify 601F28 x Finish.



ANSI Wrought Strike Box

To order with lockset, see How to Order, page 9. To order separately, specify 120F76.




Full Lip Strike

Brass.
2- 3/4" x full lip x 1-1/8" lip to center.
No optional lip lengths. To order separately specify 607F76.

Options & Accessories

CL3800

Strikes




ANSI Curved Lip (standard)

Brass or stainless steel.

4-7/8" x 1-1/4" x 1-1/4" lip to center.

Optional lip lengths: 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2", 2-3/4", 3".

To order separately, specify 217L13 x Lip Length x Finish.



Curved Lip "T" Strike


Brass.

2-3/4" x 1-1/8" x 1-1/4" lip to center.

Optional lip lengths: 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2", 2-3/4", 3".

To order with lockset, specify quick code found on pages 11.

To order separately, specify 586L19 x Lip Length x Finish.



Rabbeted Front and Strike


Brass or bronze.

4" x 5/8" for 1/2" rabbet.

No optional lip lengths.


To order with lockset, specify quick code found on pages 11.

To order separately, specify 601F28 x Finish.



ANSI Wrought Strike Box

To order with lockset, specify quick code found on page 12. To order separately, specify 120F768.



Full Lip Strike

Brass or stainless steel.


2-1/4" x 1-3/4" x 1-1/4" lip to center.

No optional lip lengths.

To order with lockset, specify quick code found on pages 11.

To order separately specify 680L50M020 x Finish.

Anti-rattle tab.

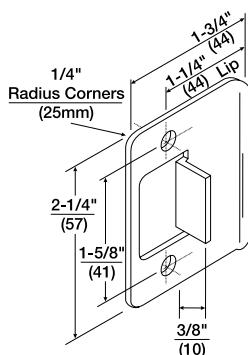

Full Lip Strike - 1/4" Radius Corners

Brass or stainless steel.

Similar in dimension and function to L50 strike (above) but with radius corners for easy mortising by power tools.

To order with lockset, specify quick code found on pages 11.


To order separately specify 680L51M020 x Finish.

Anti-rattle tab.


Options and Accessories

CK4200


Strikes




ANSI Curved Lip (standard)
Brass or stainless steel
4-7/8" (124mm) x 1-1/4" (32mm) x
1-1/4" (32mm) lip to center
Optional lip lengths: 1" (25mm),
1-1/8" (29mm), 1-3/8" (35mm),
1-1/2" (38mm), 1-3/4" (44mm),
2" (51mm), 2-1/4" (57mm),
2-1/2" (64mm), 2-3/4" (70mm),
3" (76mm)
To order optional strike with lockset, see
Quick Codes, page 11.
To order separately, specify 217L13 x
Lip Length x Finish.



Curved Lip "T" Strike
Brass
2-3/4" (70mm) x 1-1/8" (29mm) x
1-1/4" (32mm) lip to center
Optional lip lengths: 1" (25mm),
1-1/8" (29mm), 1-3/8" (35mm),
1-1/2" (38mm), 1-3/4" (44mm),
2" (51mm), 2-1/4" (57mm),
2-1/2" (64mm), 2-3/4" (70mm),
3" (76mm)
To order optional strike with lockset, see
Quick Codes, page 11.
To order separately, specify 586L19 x
Lip Length x Finish.






Rabbeted Front and Strike
Brass or bronze
4" (102mm) x 5/8" (16mm) for
1/2" (13mm) rabbet.
No optional lip lengths.
To order with lockset, see Quick Codes,
page 11.
To order separately, specify 601F28 x Finish.



ANSI Wrought Strike Box
To order with lockset, see
Quick Codes, page 11.
To order separately, specify
120F76-8.

Cylinders



Standard Cylinder
Finishes: 606, 626

Interchangeable Core
Finishes: 605, 606, 611,
612, 613, 613E, 625, 626, 722

Master Ring Cylinder
Finishes: 606, 626

Conventional	2000-052 (standard)	8000	2060-052
Security	2010-052	8010	N/A
Hotel Conventional	2001-052	8001-042	2061-052
Hotel Security	2011-052	8011-042	N/A
Pyramid High Security	2020-052	8020	N/A
Pyramid Security	2027-052	8027	N/A
Access 3 - AP	2500-052	8500	N/A
Access 3 - AS	2600-052	8600	N/A
Access 3 - AHS	2700-052	8700	N/A

Plug diameter for standard and Access 3 cylinders is .509, .552 for security cylinders and .496 for Pyramid cylinders.
Cylinders are brass and come with 2 nickel silver keys.


To order optional cylinder with lockset, see Quick Codes, page 11.

To order cylinder separately, specify Part No. x Keyway x Finish (e.g., 2000-052 x L4 x 626).

Options and Accessories

CK4400


Strikes



ANSI Curved Lip (standard)

Brass or stainless steel.


4-7/8" x 1-1/4" x 1-1/4" lip to center.
Optional lip lengths: 1", 1-1/8",
1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2",
2-3/4", 3".
To order with lockset, specify quick code
found on pages 9.
To order separately, specify 217L13 x Lip
Length x Finish.



Full Lip Strike - 1/4" Radius Corners

Brass or stainless steel.


Similar in dimension and function to L50
strike (above) but with radius corners for
easy mortising by power tools. To order
separately specify 680L51M020 x Finish.
Anti-rattle tab.



Curved Lip Box

Brass.


2-3/4" x 1-1/8" x 1-1/4" lip to center.
Optional lip lengths: 1", 1-1/8",
1-3/8", 1-1/2", 1-3/4", 2", 2-1/4", 2-1/2",
2-3/4", 3".
To order with lockset, specify quick code
found on pages 9.
To order separately, specify 586L19 x Lip
Length x Finish.

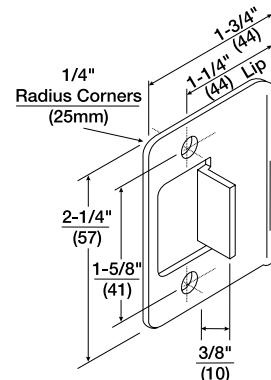

Full Lip Strike

Brass or stainless steel.

2-1/4" x 1-3/4" x 1-1/4" lip to center.
No optional lip lengths.
To order separately specify 680L50M020 x
Finish.
Anti-rattle tab.



ANSI Wrought Strike Box

To order with lockset, specify quick code
found on page 9. To order separately,
specify 120F768.

Tools

Knob Cover Removal Tool

To order, specify 506F57-8.




Knob Removal Tool

To order, specify 574F15-8.



Cylinder Shell Loading Kit


To order, specify CT-10.

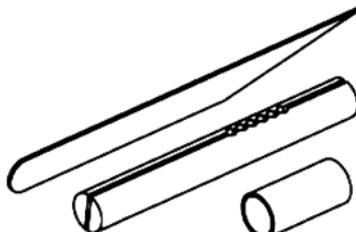

Options & Accessories

ED5000

Mortise Strikes




Mortise Strike

Standard on ED5600 and ED5600A. Non-handed, ANSI curved lip, 4-7/8" x 1-1/4" x 1-1/4" (124mm x 32mm x 32mm) lip to center. Black finish. To order separately, specify 650L657020.



Mortise Strike for Pairs of Doors with Astragal


Optional for use with ED5600 and ED5600A devices where an astragal is to be installed. Non-handed, ANSI straight lip, 4-7/8" x 1-1/4" x 7/8" (124mm x 32mm x 22mm) lip to center. Black finish. To order with exit device, specify SS078. To order separately, specify 653L157014.



Open Back Strike

Optional for use with ED5600 x vertical rod devices on a pair of doors. Non-handed, 4-7/8" x 1-1/4" (124mm x 32mm). Black finish. To order with exit device, specify SB134 for 1-3/4" doors, SB214 for 2-1/4" doors. To order separately, specify Part No.

Door Thickness	Type	Part No.
1-3/4" (44mm)	Curved lip	653L183016
	Straight lip	653L163016
2-1/4" (57mm)	Curved lip	653L183020
	Straight lip	653L163020



Mortise Strike

Standard on ED5600 and ED5600A devices on 2" (51mm) (D200) and 2-1/4" (57mm) (D214) thick doors. Handed ANSI curved lip, 4-7/8" x 1-1/4" x 1-1/2" (124mm x 32mm x 38mm) lip to center. Black finish. To order separately, specify 656L677024 for LHR doors, 656L687024 for RHR doors.


ANSI Wrought Strike Box

Optional for use with ED5600 and ED5600A devices. To order with exit device, specify M17. To order separately, specify 120F76-8.

Filler Plates



Optional for use on stock metal doors when required. To order, specify 334F99-8 600.



Optional for use on stock metal doors when required. To order, specify 236L708018 x Fin.



Optional for use on stock metal doors when required. To order, specify 077F19-8 600.

Options and Accessories

ML2000, ML20900 ECL and ML20600 NAC

Strikes

ANSI Straight Lip (standard)

Brass, bronze or stainless steel

Non-handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center (standard)

Optional lip lengths: 7/8" (22mm), 1" (25mm), 1-1/8" (29mm), 1-1/4" (32mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

ANSI Curved Lip

Brass, bronze or stainless steel

Handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center (standard)


Optional lip lengths: 1-1/8" (29mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

ANSI Wrought Strike Box

To order with lockset, see


Quick Codes, page 70.

To order separately, specify
120F76.



Open Back


Size: 5-1/4" (133mm) x 1/4" (32mm).

	Part No.	Description	Hand	Door Thickness	Part
Note: Only Available with ML2000  Latchbolt x Deadbolt	236L72	Straight Lip	LHR	1-3/4" (44mm)	411L63 016
	340L60	Curved Lip for RH/LHR		2" (51mm)	411L63 018
	340L61	Curved Lip for LH/RHR		2-1/4" (57mm)	411L63 020
Latchbolt Only  Latchbolt Only	236L73	Straight Lip	RHR	1-3/4" (44mm)	411L62 016
	340L62	Curved Lip for RH/LHR		2" (51mm)	411L62 018
	340L63	Curved Lip for LH/RHR		2-1/4" (57mm)	411L62 020
Deadbolt Only 	236L74	Straight Lip			
Blank Filler Plate 	236L70	Straight Lip			

To order strike with lockset, see How to Order, page 66.

To order strike separately, specify Part No. x Lip Length x Finish
(e.g., 340L60 x 1-1/2" x 626).

To order with lockset, see
Quick Codes, page 70. To order
separately, specify Part No. x
Door Thickness x Finish (e.g.,
411L62 x 2" x 626).



Rabbeted Front and Strike

Brass or bronze


For 1/2" (13mm) rabbet

No optional lip lengths

	Part No.	Hand
Latchbolt x Deadbolt	318F66 318F69	RH/LHR LH/RHR
Latchbolt only	318F64 318F67	RH/LHR LH/RHR
Deadbolt only	318F65 318F68	RH/LHR LH/RHR

To order with lockset, see
Quick Codes, page 70.

To order separately,
specify Part No. x Finish
(e.g., 318F66 x 626).



Strikes/Kits

ML2000 and ML20900 Mortise Locks with BHSS Trim

Strikes



ANSI Straight Lip (standard)

Stainless steel
Non-handed
4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center (standard)
Optional lip lengths: 1-1/8" (29mm), 1-1/4" (32mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)


Note: Only Available with ML2000




Latchbolt x Deadbolt



Latchbolt Only



Deadbolt Only



To order strike with lockset, see How to Order, page 6.
To order strike separately, specify Part No. x Lip Length x Finish (e.g., 340L60 x 1-1/2" x 626).

ANSI Curved Lip

Stainless steel
Handed
4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center (standard)
Optional lip lengths: 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

ANSI Wrought Strike Box

To order with lockset, see Quick Codes, page 7.
To order separately, specify 120F76.



Open Back

Size: 5-1/4" (133mm) x 1/4" (32mm).

Hand	Door Thickness	Part
LHR	1-3/4" (44mm)	411L63 016
	2" (51mm)	411L63 018
	2-1/4" (57mm)	411L63 020
RHR	1-3/4" (44mm)	411L62 016
	2" (51mm)	411L62 018
	2-1/4" (57mm)	411L62 020

To order with lockset, see Quick Codes, page 7. To order separately, specify Part No. x Door Thickness x Finish (e.g., 411L62 x 2" x 626).




Rabbeted Front and Strike

Brass or bronze
For 1/2" (13mm) rabbet
No optional lip lengths

Part No.	Hand
318F66 318F69	RH/LHR LH/RHR
318F64 318F67	RH/LHR LH/RHR
318F65 318F68	RH/LHR LH/RHR

To order with lockset, see Quick Codes, page 7.
To order separately, specify Part No. x Finish (e.g., 318F66 x 626).



Strikes/Kits



ML2000 and ML20900 Mortise Locks with BLSS Trim

Strikes


ANSI Straight Lip (standard)

Stainless steel
Non-handed
4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center (standard)
Optional lip lengths: 1-1/8" (29mm), 1-1/4" (32mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)


Note: Only Available with ML2000



Latchbolt x Deadbolt



Latchbolt Only



Deadbolt Only



Blank Filler Plate

ANSI Curved Lip

Stainless steel
Handed
4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center (standard)
Optional lip lengths: 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

ANSI Wrought Strike Box

To order with lockset, see

Quick Codes, page 12.

To order separately, specify
120F76.



Open Back

Size: 5-1/4" (133mm) x 1/4" (32mm).

Hand	Door Thickness	Part
LHR	1-3/4" (44mm)	411L63 016
	2" (51mm)	411L63 018
	2-1/4" (57mm)	411L63 020
RHR	1-3/4" (44mm)	411L62 016
	2" (51mm)	411L62 018
	2-1/4" (57mm)	411L62 020

To order with lockset, see
Quick Codes, page 12. To order
separately, specify Part No. x
Door Thickness x Finish (e.g.,
411L62 x 2" x 626).



Rabbeted Front and Strike


Brass or bronze

For 1/2" (13mm) rabbet

No optional lip lengths

	Part No.	Hand
Latchbolt x Deadbolt	318F66 318F69	RH/LHR LH/RHR
Latchbolt only	318F64 318F67	RH/LHR LH/RHR
Deadbolt only	318F65 318F68	RH/LHR LH/RHR

To order with lockset, see
Quick Codes, page 12.
To order separately,
specify Part No. x Finish
(e.g., 318F66 x 626).



Strikes/Kits

ML2000 and ML20900 Mortise Locks with Push/Pull Paddle Trim (HPSK)

Strikes



ANSI Straight Lip (standard)

Brass, bronze or stainless steel



Non-handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center (standard)
Optional lip lengths: 1-1/8" (29mm), 1-1/4" (32mm), 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)


3" (76mm)



Note: Only Available with ML2000



Latchbolt Only



Deadbolt Only



To order strike with lockset, see How to Order, page 19.
To order strike separately, specify Part No. x Lip Length x Finish (e.g., 340L60 x 1-1/2" x 626).

Kits

Positive Pull Stop Kit

Used on openings where weather stripping is installed or when door closers are not utilized, this kit prevents the latch from retracting when pulling door closed. Contains 2 wood screws, 2 machine screws and instructions. To order, specify 813F068.

Specialty Hardware.16

ANSI Curved Lip

Brass, bronze or stainless steel

Handed


4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center (standard)
Optional lip lengths: 1-3/8" (35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

ANSI Wrought Strike Box

To order with lockset, see

Quick Codes, pages 20-21.

To order separately, specify
120F76.



Open Back

Size: 5-1/4" (133mm) x 1/4" (32mm).

Hand	Door Thickness	Part
LHR	1-3/4" (44mm)	411L63 016
	2" (51mm)	411L63 018
	2-1/4" (57mm)	411L63 020
RHR	1-3/4" (44mm)	411L62 016
	2" (51mm)	411L62 018
	2-1/4" (57mm)	411L62 020

To order with lockset, see Quick Codes, pages 20-21. To order separately, specify Part No. x Door Thickness x Finish (e.g., 411L62 x 2" x 626).



Rabbeted Front and Strike

Brass or bronze



For 1/2" (13mm) rabbet

No optional lip lengths

	Part No.	Hand
Latchbolt x Deadbolt	318F66	RH/LHR
	318F69	LH/RHR
Latchbolt only	318F64	RH/LHR
	318F67	LH/RHR
Deadbolt only	318F65	RH/LHR
	318F68	LH/RHR

To order with lockset, see Quick Codes, pages 20-21.

To order separately, specify Part No. x Finish (e.g., 318F66 x 626).



Strikes/Kits

HP3000 Series Tubular Lock with Push/Pull Paddle Trim


Strikes

ANSI Curved Lip

(Standard)

Brass, bronze or stainless steel, 4-7/8" (124mm) x 1-1/4" (57mm) x 1-1/4" (57mm) lip to center.

To order with push/pull paddle trim, see Quick Codes, page 25. To order separately, specify 217L13 x Finish.




Curved Lip Box

(Optional)

Brass, 2-3/4" (70mm) x 1-1/8" (29mm) x 1-1/4" (57mm) lip to center.

To order with push/pull paddle trim, see Quick Codes, page 25. To order separately, specify 586L19 x Finish.



ANSI Wrought Strike Box

To order with push/pull paddle trim, see Quick Codes, page 25.


To order separately, specify 120F76.



Full Lip Strike (SF114)

Brass, 2-1/4" x 1-3/4" x 1-1/4" lip to center. No optional lip lengths.


To order separately specify 680L50M020 x Finish.
Anti-rattle tab.



Full Lip Strike – 1/4" Radius Corners (SFR114)

Brass, 2-1/4" x 1-3/4" x 1-1/4" lip to center. No optional lip lengths.


To order separately specify 680L51M020 x Finish.
Anti-rattle tab.



Kits

Kit for Retrofitting HP3000 Push/Pull Paddle Trim

Use to cover prep from HL10 series push/pull trim and other manufacturer's trim, when retrofitting HP3000 trim. Contains 2 retrofit plates and 8 screws. Available in 630 finish only. To order, specify 791F39.



Positive Pull Stop Kit

Used on openings where weather stripping is installed or when door closers are not utilized, this kit prevents the latch from retracting when pulling door closed. Contains 2 wood screws, 2 machine screws and instructions. To order, specify 813F068.

