



**C.R. LAURENCE CO., INC.**  
**PROFESSIONAL QUALITY**


## Specifications:

**Material:** Solid Brass

**Glass Thickness:** 1/4" (6mm) to 1/2" (12mm)

**Notch Required**

**Includes:** Mounting screws and gaskets

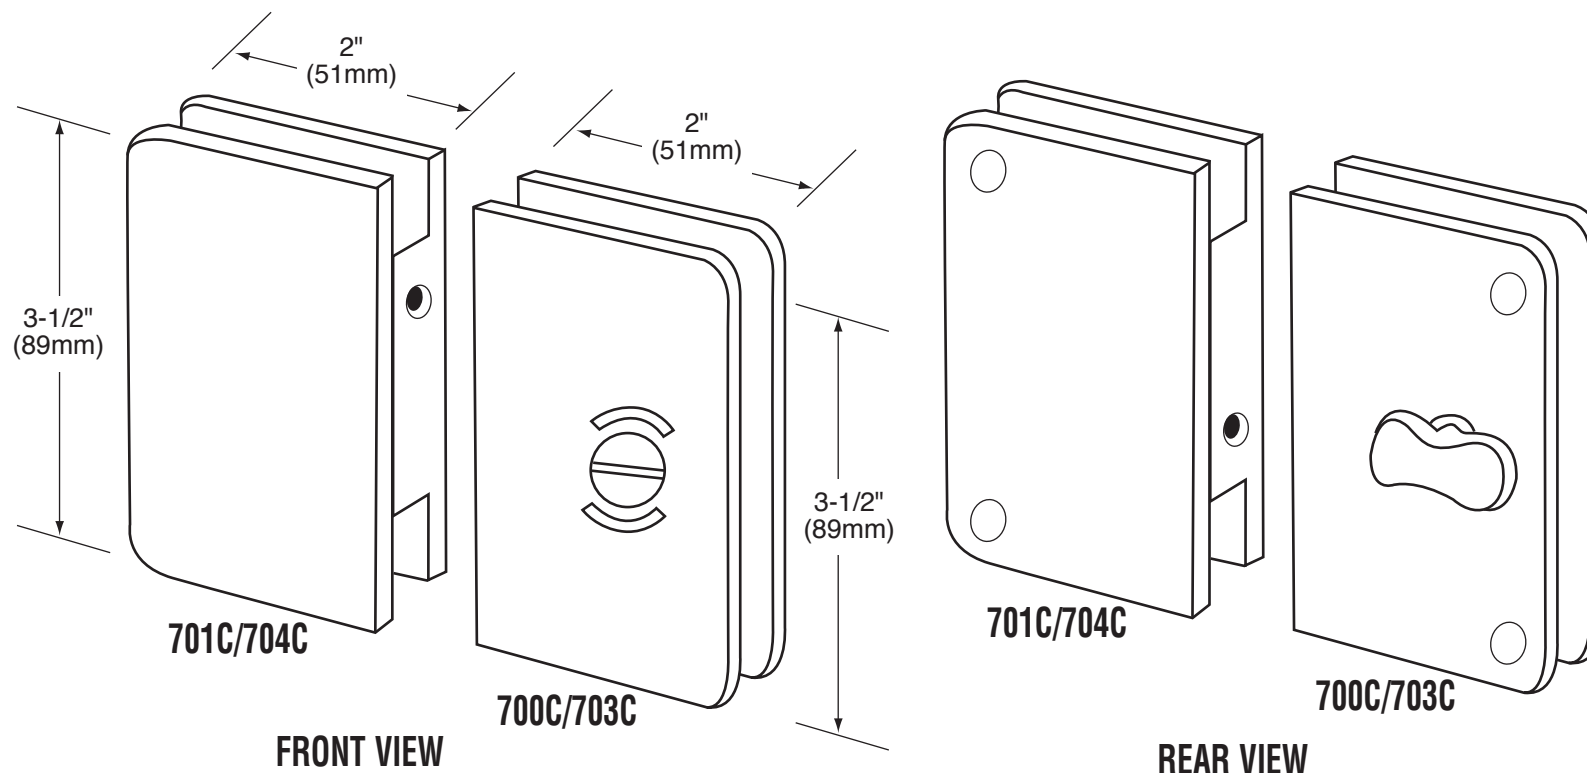

# GLASS DOOR LOCK WITH INDICATOR AND GLASS DOOR KEEPER

CAT No. 700C, 701C, 703C AND 704C

Template Shown on Next Page


C.R. Laurence Co., Inc.  
crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144;  
Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.

© Copyright 2009, C.R. Laurence Co., Inc.\_SDT21\_U5



**C.R. LAURENCE CO., INC.**  
PROFESSIONAL QUALITY

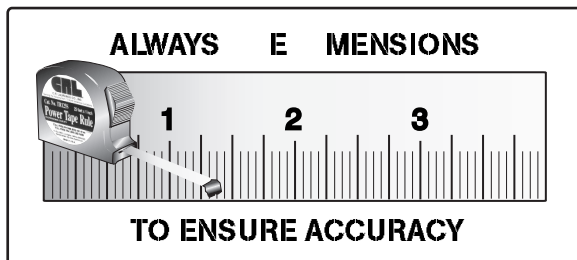

**NOTE:**

When using Cat. No. 700C, the minimum clearance between the door glass and the wall/panel is 1/8" (3mm), and the maximum clearance is 1/2" (12mm). The standard recommended clearance is 3/16" (5mm).

**NOTE:**

When using Cat. No. 703C and 704C the clearance between panels is 1/16" (1.5mm) to 1/8" (3mm).

# GLASS DOOR LOCK WITH INDICATOR AND GLASS DOOR KEEPER

**CAT No. 700C, 701C, 703C AND 704C**

**C.R. Laurence Co., Inc.**  
crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.

