


GLASS FABRICATION TEMPLATE FOR THE
Z-SERIES SQUARE TYPE RADIUS BASE CLAMPS @ CORNER CONDITION
FOR 3/8" (10mm) AND 1/2" (12mm) GLASS

NO GLASS FABRICATION IS
REQUIRED WHEN REPOSITIONABLE
PLATE IS USED AT BOTTOM CORNER
POINTS OF GLASS

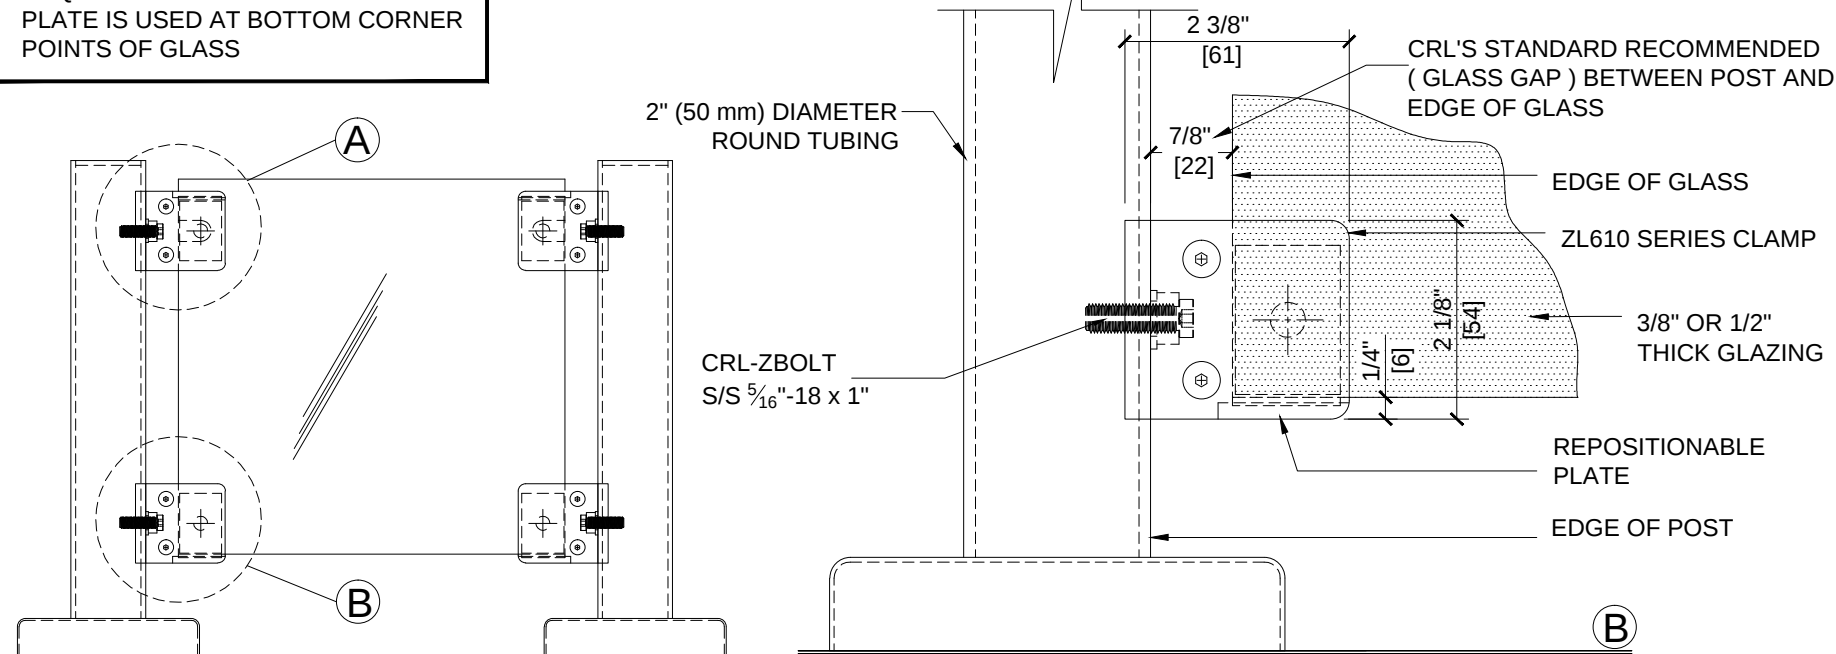

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.
DO NOT SCALE OR DIMENSION ACTUAL DRAWING
TO ENSURE ACCURACY

SPECIFICATIONS:

GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS

INCLUDES GASKETS FOR BOTH GLASS THICKNESSES


BASE DESIGN: RADIUS BACK NON HANDED

FOR USE WITH: 2" (50.8 mm) DIAMETER ROUND TUBING (SEE CHART).

MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.

GLASS FABRICATION: NO GLASS FABRICATION IS REQUIRED WHEN REPOSITIONABLE PLATE IS USED AT BOTTOM CORNER POINTS.

INCLUDES: RUBBER GASKETS AND REMOBE STEEL PIN WITH GROMMET.

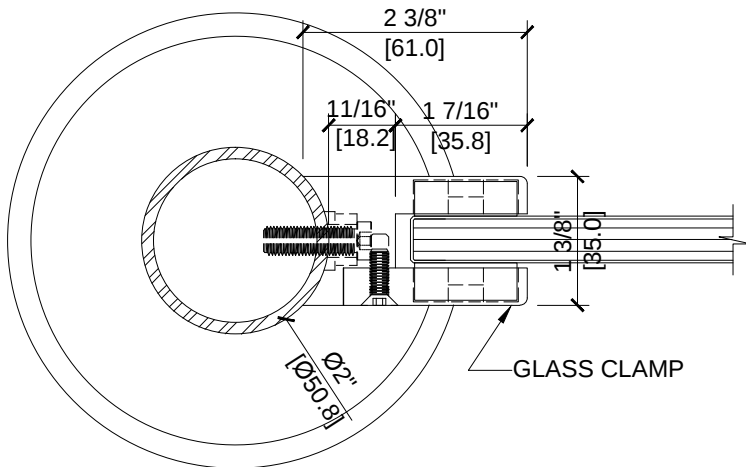

TEMPLATE USED FOR:

CATALOG NUMBER	TUBE DIA
ZL610BN	2" (50.8 mm)
ZL610CH	2" (50.8 mm)
ZL610SC	2" (50.8 mm)
ZL610W	2" (50.8 mm)



ARCHITECTURAL PRODUCTS
PH: 800-421-6144 FX: 800-262-3299
WWW.CRLAURENCE.COM

DESCRIPTION:

Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP

FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS

CAT. NO: (SEE CHART)

FILE NAME: ZL610-Gls Fab

DRAWN BY: J.V.


CHECKED BY: R.D.

SHT 1 OF 2

DATE: 01/06/14

SCALE: 6"=1'-0"

GLASS FABRICATION TEMPLATE FOR THE
Z-SERIES SQUARE TYPE RADIUS BASE CLAMPS
FOR 3/8" (10mm) AND 1/2" (12mm) GLASS

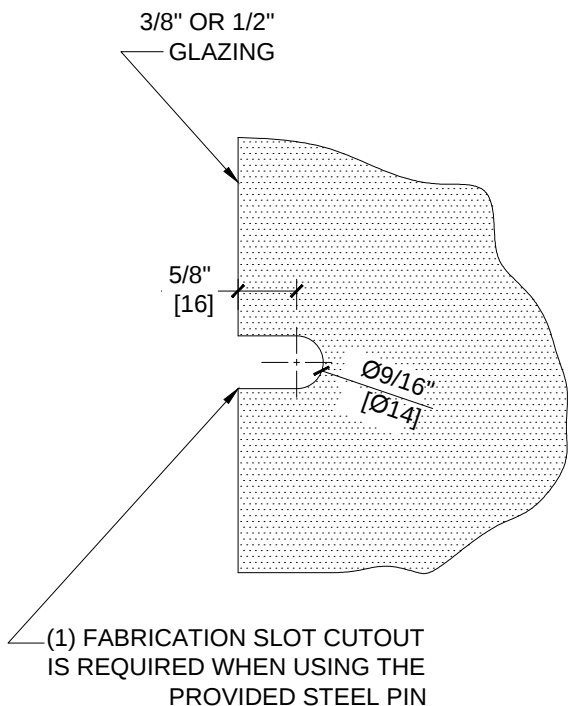

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.
DO NOT SCALE OR DIMENSION ACTUAL DRAWING
TO ENSURE ACCURACY

SPECIFICATIONS:

GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS

INCLUDES GASKETS FOR BOTH GLASS THICKNESSES



BASE DESIGN: RADIUS BACK NON HANDED DESIGN

FOR USE WITH: 2" (50.8 mm) DIAMETER ROUND TUBING (SEE CHART).

MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.

GLASS FABRICATION: FOR 3/8" (10MM) AND 1/2" (12MM) THICK GLASS A 9/16" (14MM) DIAMETER FINGER SLOT IS REQUIRED WHEN USING THE REQUIRED STEEL PIN FOR GLASS SUPPORT

INCLUDES: RUBBER GASKETS AND STEEL PIN WITH GROMMET.

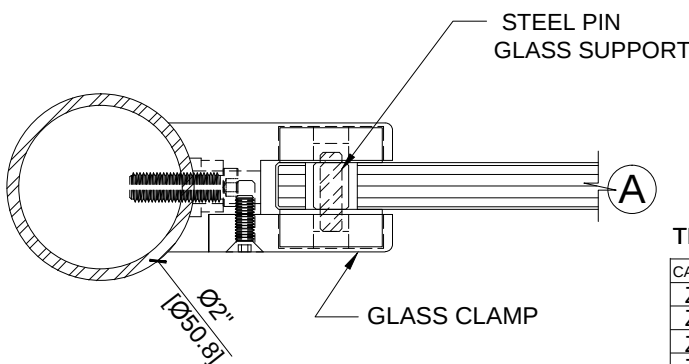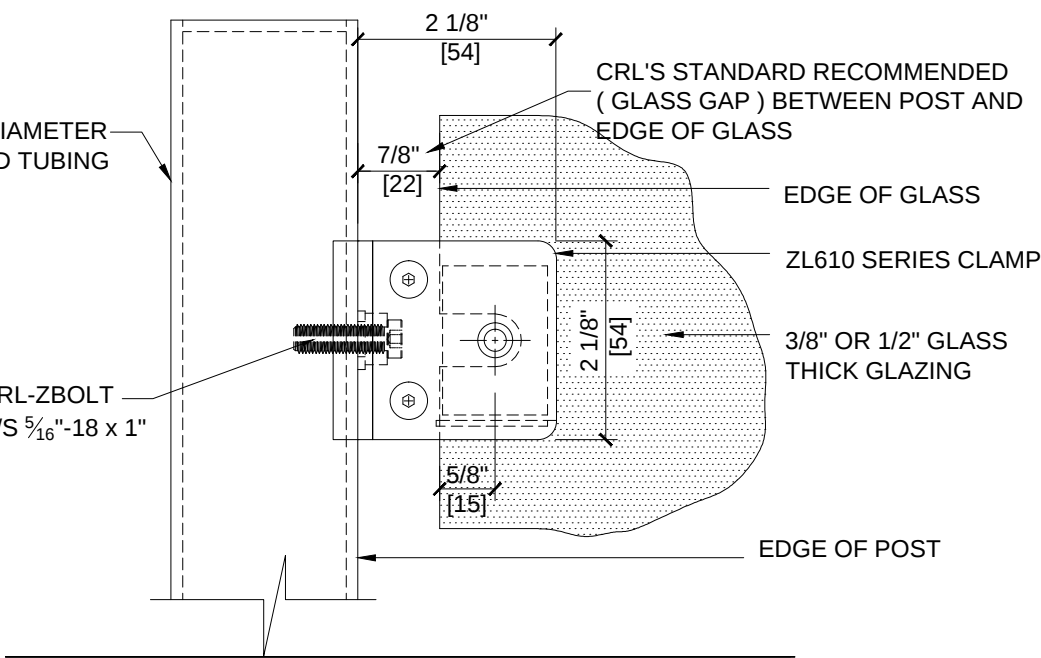

TEMPLATE USED FOR:

CATALOG NUMBER	TUBE DIA
ZL610BN	2" (50.8 mm)
ZL610CH	2" (50.8 mm)
ZL610SC	2" (50.8 mm)
ZL610W	2" (50.8 mm)



ARCHITECTURAL PRODUCTS
PH: 800-421-6144 FX: 800-262-3299
WWW.CRLAURENCE.COM

DESCRIPTION:

Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP

FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS

CAT. NO: (SEE CHART)

FILE NAME: ZL610-Gls Fab

DRAWN BY: J.V.

CHECKED BY: R.D.

SHT 2 OF 2

DATE: 01/06/14

SCALE: 6"=1'-0"