

Specifications:

Glass Sizes: 5/16" (8mm) to 3/8" (10mm) thick tempered safety glass

Construction: Stainless steel or solid brass

Closing Type: Free-swinging Two Holes Required (No Cutout) **Includes:** Gaskets, screws and template

Use of Gaskets:

For 5/16" (8mm) Glass: Use one thick gasket on each side For 3/8" (10mm) Glass: Use one thin gasket on each side

Recommendations:

For public safety, we recommend the use of only tempered safety glass.

Do not use power tools when installing these hinges.

ZURICH

180° Glass-to-Glass Outswing or Bi-Fold Inswing Hinge (Inline)

* SEE TEMPLATE ON BACK * Refer to Dimensions Shown to Ensure Accuracy

CAT No. ZURO7


*Maximum	5/16" (8mm) Glass		3/8" (10mm) Glass	
Door Capacities	Weight Width		Weight Width	
Using 2 Hinges	\ 0,	36"(914mm)	100 lbs.(45 kg)	36"(914mm)
Using 3 Hinges		40"(1016mm)	150 lbs.(68 kg)	40"(1016mm)


Maintenance Guidelines:


 Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as lyory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

^{*}NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.



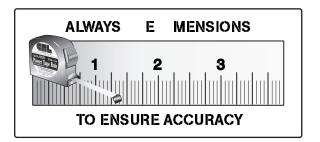

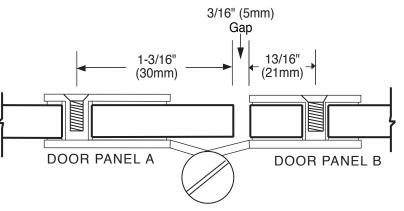

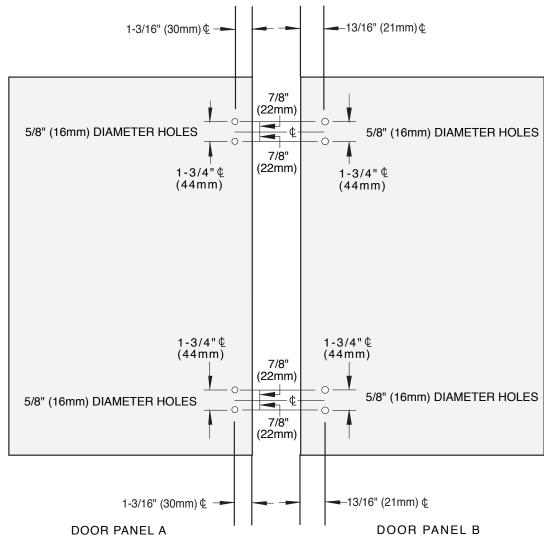

ZURICH

180° Glass-to-Glass Outswing or Bi-Fold Inswing Hinge (Inline) CAT No. ZUR07

4P-14