

CRL Barpads®

• Self-Adhesive or Snap-In

These CRL Barpads® are made of tough neoprene rubber and are available with either self-adhesive backing or a snap-in type. Both Barpads® are 2-3/8" (60 mm) in diameter and 1/4" (6 mm) thick. Cat. No. BP1 has the adhesive back, while Cat. No. BP2 has a round button on the back that will snap into the 1" (25 mm) diameter holes found on our aluminum or steel Side Slats. Minimum order is one each. Barpads® can be combined for quantity pricing.




CAT. NO. BP1
Self-Adhesive



CAT. NO. BP2
Snap-In

CRL Baseplate Pads

• Made From Tough, Durable Neoprene

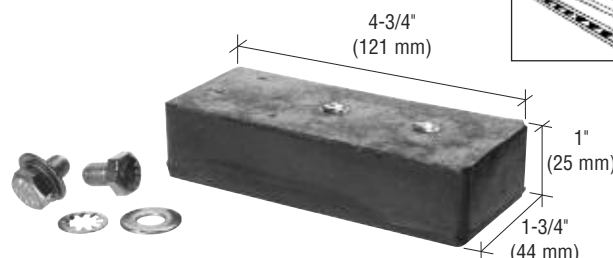


Our CRL Baseplate Pads are molded from tough neoprene rubber, and come with threaded inserts and bolts for attaching to the ledgeboard. They can be mounted on CRL Truck Racks or any other truck's glass rack with a minimum 3-1/2" (89 mm) of ledgeboard width. Minimum order is one each.

CAT. NO. BPP414

CRL Slotted Barpad®

• Fits Aluminum or Steel Slats With Slots


This CRL Slotted Barpad® is made of tough neoprene rubber, and designed for use on either aluminum or steel Barkow Side Slats. Choose the desired slot and this Barpad® will just snap into place. Minimum order is one each. Barpads® can be combined for quantity pricing.

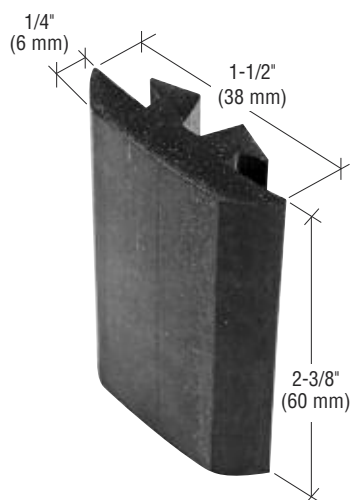

CAT. NO. BP3

CRL Load Stopper


This CRL Load Stopper is designed to keep your glass loads from shifting along the truck's glass rack and ledgeboard. Designed for use with aluminum and steel Side Slats, each Load Stopper has a locking cleat, which snaps into the slat slots, holding it tight while the heavy neoprene pad cushions and protects the glass. Load Stoppers will work with either 3-1/2" or 5-3/4" (89 or 146 mm) ledgeboards. Minimum order is one each.

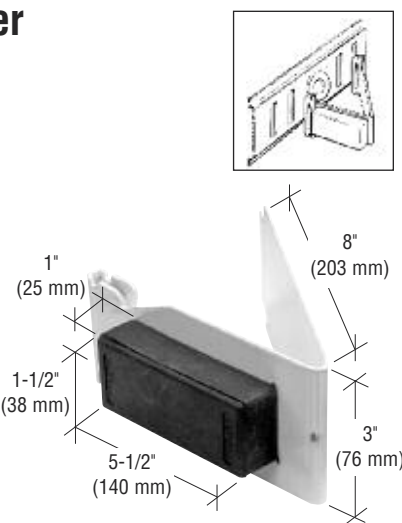

CAT. NO. BRLS1

CRL Slic-Rak® Glass Rack Expanders


The CRL Slic-Rak® was actually invented by a glass shop owner to maximize the rack capacity for both his truck and shop racks. The Slic-Rak® is especially handy when moving many smaller lites of glass. Just slip the mounting plate on the back of the angle over an existing slat and tighten the wingnut. The Slic-Rak® will work on slats up to 2-1/4" (57 mm) thick. Made from 1/4" (6 mm) thick aluminum angle, each has a thick neoprene pad to protect the edge of the glass and to prevent slippage. Minimum order is one pair.



CAT. NO. SLR2

Barpad is a registered trademark of F. Barkow, Inc.
Slic-Rak is a registered trademark of Thomas E. Cole.

CRL Glass Ties

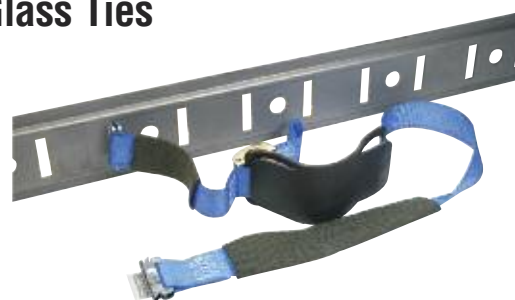

The CRL Glass Tie is a very heavy 2" (51 mm) wide polyester strap with a plated steel attachment bracket on each end for use on steel or aluminum Side Slats. A spring-loaded brake locks the strap tight until depressed. This strap has a working strength of 835 pounds (380 kg).

CAT. NO.	QTY/PKG
BRGT4	4' (1219 mm)
BRGT8	8' (2438 mm)

Minimum order: 1 each. Can be combined for quantity pricing.