

CRL Locks for Showcases and Cabinets


• The Largest Variety

CRL offers a vast selection of Glass Door Locks for any type of Showcase configuration. From economy styles to deluxe models, these Locks are well designed, functional, and easy to install. Every showcase needs security, especially in a high traffic retail environment, and CRL provides every type of Lock option you will need to satisfy your customer's requirements. CRL Showcase Locks can be ordered "keyed alike" and in a variety of finishes in many models.



Cam Locks  
See pages 421G-425G

Plunger Locks  
See pages 417G-421G

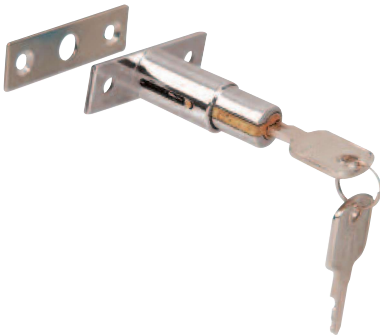

Track Locks  
See page 416G



Ratchet Locks  
See pages 414G-416G




Glass Door Locks  
See pages 426G-428G, 432G



CRL Sliding Glass Door Lock

- Special Screw-On Ratchet Bar to Hold Lock Onto Glass
- Two Bright Finishes
- Fits Up to 1/4" (6 mm) Glass

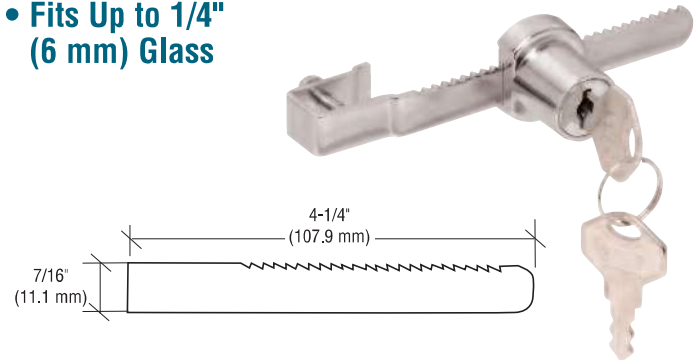


Manufactured expressly for CRL, this Lock is extremely convenient to open and re-secure. It is positioned approximately mid-way up on the showcase sliding glass doors. The bar width is 7/16" (11.1 mm), and it is notched for closed adjustment. The bypassing glass door overlap is 1-1/8" to 3-1/4" (28.6 to 82.6 mm). Each Lock is supplied with two keys.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
2040	2040KA	Chrome
2045	2045KA	Brass
2040KEY*	2040KEY*	Replacement Key

Minimum order: 1 each. Finishes can be combined for quantity pricing.  
\*NOTE: Specify key number when placing order for replacement key.

CRL Sliding Glass Door Lock

- Fits 1/4" (6 mm) Glass
- Anti-Spread Housing
- Chrome Finish

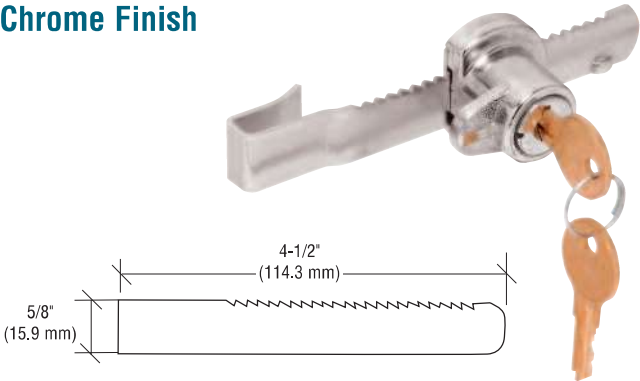

Our 963L Sliding Glass Door Lock has an improved design that includes a housing that prevents spreading of glass doors. Fits up to 1/4" (6 mm) sliding 'all-glass' doors, many wood and metal doors, too. They're easily attached without tools. Finished in rustproof chrome, they're completely tamperproof. Ratchet bar fits snugly on the door to ensure close adjustment of lock position. For overlaps of 3/4" to 3-3/8" (19 to 85.7 mm). Bar width is 5/8" (15.9 mm). Comes with two keys.

CAT. NO.	KEYED	FINISH
963L	Randomly	Chrome Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Glass Showcase Lock

- Fits Up to 5/16" (8 mm) Thick Glass Doors
- Screw-On Ratchet Bar to Hold Lock Onto Glass
- Secure, Double-Bit Key




This CRL Glass Showcase Lock is designed to be used on showcase or cabinets with sliding glass doors, and is available randomly keyed or keyed alike. Extremely convenient to open and re-secure. The ratchet bar is secured to one of the glass panels with a plastic tipped thumb screw. The bar width is 13/32" (10.3 mm). Glass door overlap is 1-1/4" to 4" (31.8 to 101.6 mm). Each Lock is supplied with two double-bit keys.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>220CH</b>	<b>220CHKA</b>	Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Adjustable Sliding Glass Door Lock

- For Use On All Types of Glass Sliding Doors Up to 1/2" (12 mm) Thick

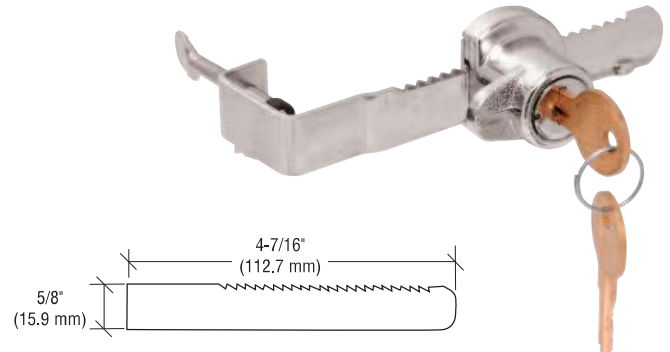


This CRL "Adjustable" Sliding Glass Door Lock fits just about any sliding 'all-glass' door, and many wood and metal doors, too. They are easily attached - you don't need tools. The lock cylinder has an "Anti-Spreader" feature and is constructed of durable steel, finished in rustproof chrome, and the bar fits snugly on the door. Ratchet bar ensures close adjustment of Lock position. For laps 3/4 to 3-3/8" (19 to 85.7 mm). Bar width is 5/8" (15.9 mm). The thumb screw adjustment on the ratchet fits any door up to 1/2" (12 mm) thick.

CAT. NO.	KEYED	FINISH
<b>962L</b>	Randomly	Chrome Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL "Pick-Proof" Sliding Glass Door Lock

- Fits 1/4" (6 mm) Glass Doors
- "Pick-Proof" Cylinder

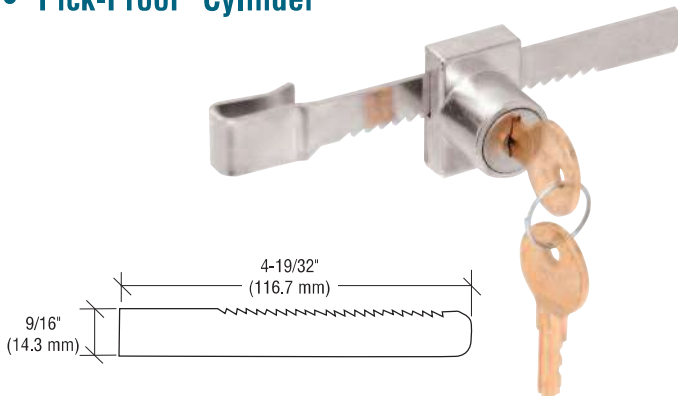

This CRL Sliding Glass Door Lock is perfect for 1/4" (6 mm) 'all-glass' sliding doors. The "pick-proof" cylinder gives you added security. It is adjustable for overlaps from 1" to 3" (25.4 to 76.2 mm). Comes with two keys. Can be keyed alike on special request.

CAT. NO.	KEYED	FINISH
<b>KV965</b>	Randomly	Chrome Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Stick-On Showcase Lock

- Sticks to Glass
- Fits Glass Doors Up to 3/8" (10 mm) Thick




CRL Stick-On Showcase Locks have "peel and stick" adhesive; no holes to drill or special tools required. Locked doors cannot be separated or lifted out. Easy to operate - push in and turn key. Works with doors overlapping 3/4" to 2" (19 to 50.8 mm). Comes with two keys.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>TDK7A</b>	<b>TDK7AKA</b>	Aluminum
<b>TDK7DU</b>	<b>TDK7DUKA</b>	Duranodic Bronze
<b>TDK7GA</b>	<b>TDK7GAKA</b>	Gold Anodized

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Keymatic Sliding Glass Door Ratchet Lock

- Multi-Combination Cylinder
- Polished Nickel Finish

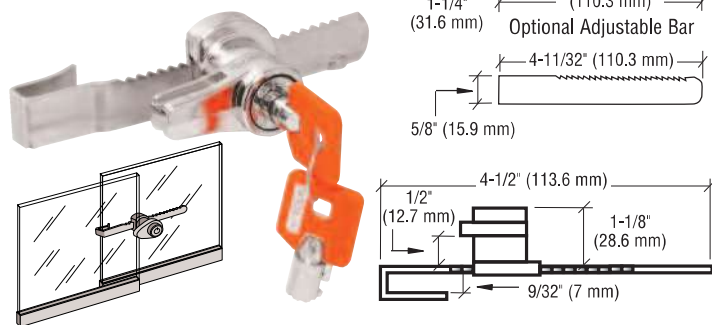


Specifically designed as a top security Lock for sliding cabinet doors. The exclusive Keymatic Cylinder allows combination changes using the Keymatic Master Combination Key (see page 430G). Up to eight different keys may be used to operate the Lock. Maximum door thickness is 1/4" (6 mm) with the standard bar. An Optional Adjustable Bar allows use on doors up to 1/2" (12 mm) thick. The front shoulder on the lock barrel prevents spreading of glass panels to bypass the Lock.

CAT. NO.	DESCRIPTION	MAX. DOOR THICKNESS
<b>KML48</b>	Standard Glass Lock	1/4" (6 mm)
<b>KML48AB</b>	Optional Adjustable Bar	1/2" (12 mm)

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Deluxe Plunger Lock

- Designed for Locking Bypassing Doors in Showcase Track
- "Slim-Line" Profile

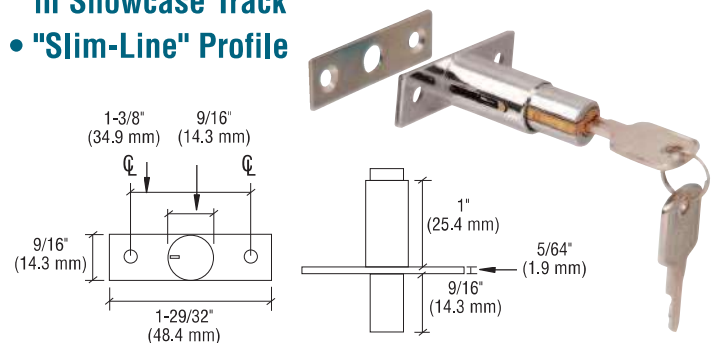


This CRL Deluxe Plunger Lock for Showcases is manufactured with the cylinder welded to the back mounting plate, which assures excellent security and reliability. Available in a selection of beautiful finishes to match popular showcase extrusions. The slim profile of the Lock simplifies installation. If it is used with our LK610 or KK610 H-Bar no notching of the glass is required. Available keyed randomly or alike.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>267BN</b>	<b>267BNKA</b>	Nickel Plated
<b>267CH</b>	<b>267CHKA</b>	Chrome Plated
<b>267DU</b>	<b>267DUKA</b>	Bronze Plated
<b>267GP</b>	<b>267GPKA</b>	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 9/16" (15 mm) diameter barrel hole and 5/16" (8 mm) plunger hole.

## CRL Track Plunger Lock

- Spring Activated Plunger Locks Without Key
- Simple to Install

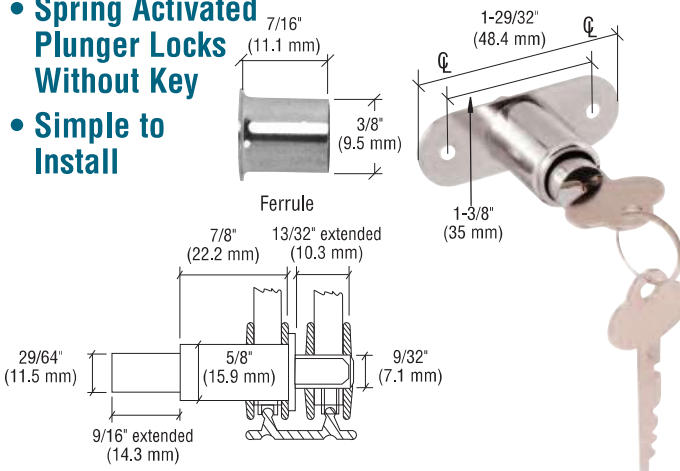


The CRL Chrome Track Plunger Lock installs easily in track assemblies with sliding glass doors. You can install it in either the top or bottom of the door. The spring-activated design permits locking simply by pushing the plunger without the key. Comes with Lock, ferrule, and two keys. If the 981 is used with Cat.No.'s D610, D5610 or MC610 H-Bar, the glass will require notching. If the LK610 H-Bar is used, no notching of the glass is required. For replacement Keys order Cat. No. 981KEY.

CAT. NO.	KEYED	FINISH
<b>981</b>	Alike	Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 5/8" (16 mm) diameter barrel hole and 3/8" (10 mm) ferrule hole.

## CRL Track Plunger Lock

- No Need to Drill a Hole in Glass

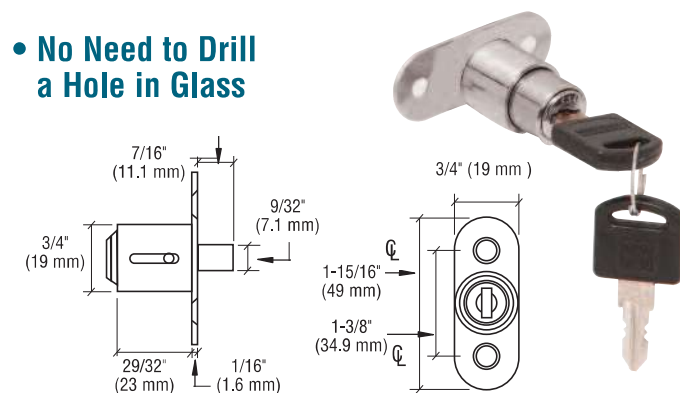



CRL Nickel Plated Track Plunger Locks install easily on sliding glass doors in showcase track assemblies. They can be mounted in the H-Bar, or within the surround frame of the glass doors. The spring-activated design permits keyless locking by simply pushing the plunger. Lock comes complete with two brass keys and trim washer. Customers needing duplicate keys can order Cat. No. LKEY which is the blank key for this Lock. If the LK54 Lock is being used with D610, D5610 or MC610 H-Bar, the glass will require notching. If being used with LK610 H-Bar and D602 Lower Track, no glass notching is required.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>LK54</b>	<b>LK54KA</b>	Nickel Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 13/16" (20 mm) diameter barrel hole and 5/16" (8 mm) plunger hole.

## CRL Keymatic Sliding Glass Door Plunger Lock

- Polished Nickel Finish
- Installs Directly Onto Glass Up to 1/2" (12 mm) Thick

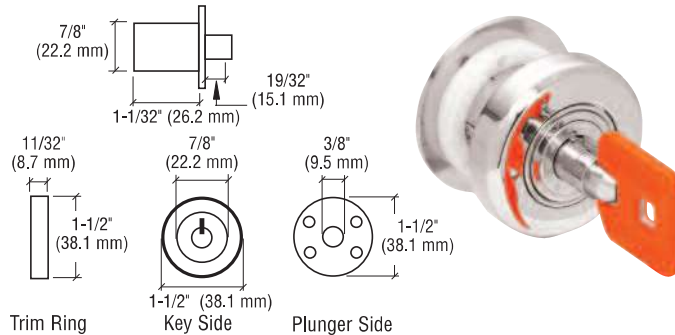

Excellent for any sliding glass door, the CRL Sliding Glass Door Keymatic Plunger Lock is installed directly onto the glass with plunger resting against edge of back sliding door. A 1-1/4" (32 mm) hole must be drilled in the front sliding door to accept the Lock. Will work in doors up to 1/2" (12 mm) thick. A captive operation system allows the key to be removed only in the locked position. Package includes the glass cover plate, rubber rings, plastic insert washer and four screws. Minimum order is one each. For additional selections of CRL Keymatic Locks and instructions on keys and combinations, refer to page 430G.

CAT. NO. KML41GL

## CRL Plunger Lock for 3/8" Glass

- Complete With Matching Finish Plated Keeper
- Chrome or Gold Finishes

Finally, CRL has Locks available for 3/8" (10 mm) glass doors. Whether you build showcases, stereo cabinets or similar furniture using 3/8" (10 mm) glass doors, these Locks will have your customer's complimenting you on your finished product. Locks come complete with two brass keys, four washers, and a keeper. Customers needing extra keys can order Cat. No. LKEY which is the blank key for this Lock.



CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK338	LK338KA	Chrome
LK340	LK340KA	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing. Requires 1" (25 mm) diameter hole.

## CRL Glass Door Cylinder Lock With Keeper

- Chrome or Gold Finishes

If you work with glass you will really appreciate these attractive and compact CRL Glass Door Plunger Locks with Matching Keepers for showcases, stereo cabinets or similar furniture using 1/4" (6 mm) glass doors. Locks come complete with two brass keys, four washers, and a keeper. Customers needing extra blank keys can order Cat. No. LKEY.




CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK38	LK38KA	Chrome
LK40	LK40KA	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing. Requires 1" (25 mm) diameter hole.

## CRL Cabinet Glass Door Lock

- Chrome and Brass Finishes
- Provides Security and Doubles as a Knob to Open Doors

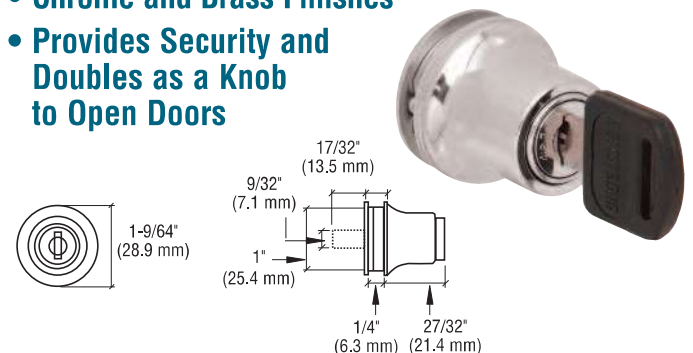

These CRL Cabinet Glass Door Locks work in cabinets with bypassing doors up to 1/4" (6 mm) thick. In its locked position the plunger from the Lock installed in the outer door extends past the edge of the inner door, keeping the doors from bypassing each other. The plunger can be activated without the key, so it takes only seconds to secure the doors. The Lock's design also allows it to be used as a knob to open the doors when in the unlocked position, so you don't have to install a separate pull handle. Locks come complete with two keys and washers. Customers needing extra blank keys can order Cat. No. LKEY.


CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK50	LK50KA	Chrome
LK52	LK52KA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing. Requires 1" (25 mm) diameter hole.



## CRL Universal Plunger Lock

- For Glass or Wood Doors From 1/4" to 1/2" (6 to 12 mm) Thick
- Available in Three Finishes

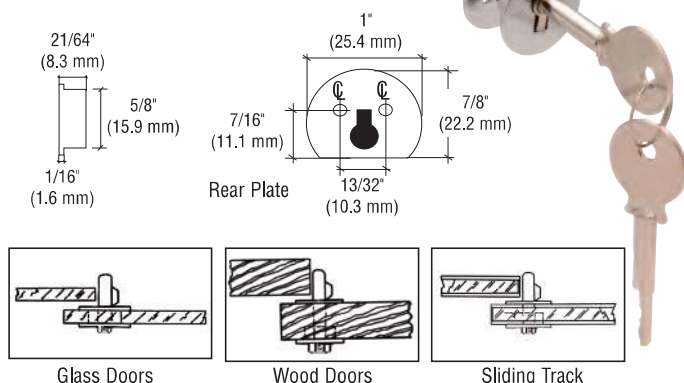


The CRL Universal Plunger Lock will fit panels from 1/4" to 1/2" (6 to 12 mm) thick, making it ideal for use in glass, masonite or wood showcase and cabinet doors. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) hole for installation. Package includes two keys, mounting screws, plates, and a lock tumbler.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
D802C	D802CKA	Chrome
D802BR	-	Brass
D802DU	-	Duranodic Bronze

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 11/16" (17 mm) diameter hole.

## CRL Sliding Glass Door Lock

- Fits Up to 1/4" (6 mm) Thick Glass
- Chrome Plated

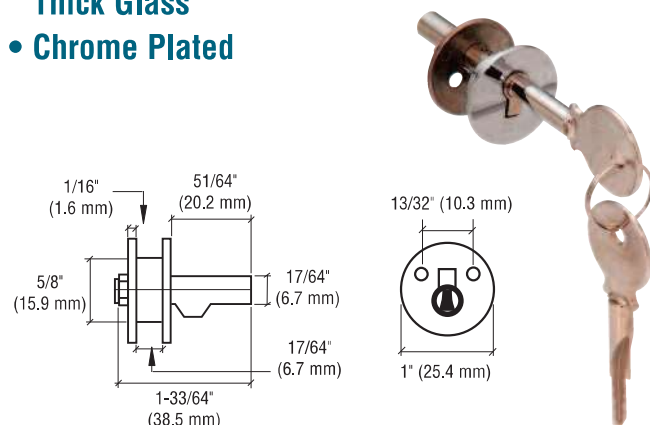


CRL Cabinet Sliding Glass Door Locks have a heavy chrome plating that gives them a rich appearance. The low profile design is favored for showcases where the appearance of locking hardware may be distracting, but security is important. They come complete with two keys, plug locking case, two washers, and two screws. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) diameter hole for installation.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK16	LK16KA	Chrome

Minimum order: 1 each. Finishes can be combined for quantity pricing.  
Requires 11/16" (17 mm) diameter hole.

## CRL Swinging Door Catch and Lock

- 3-Position Locking System

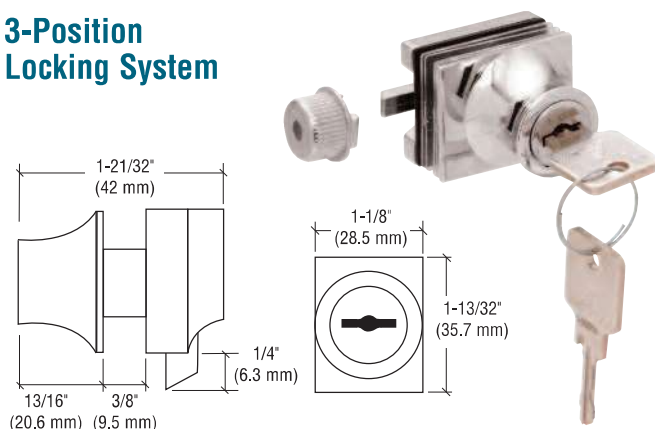


This CRL Swinging Door Catch and Lock has a contoured handle catch. The Lock provides a 3-position system: open, closed, open with self-catching position. The key can be removed in all three positions. For glass or other materials 1/4" to 3/8" (6 to 10 mm) thick. Requires cut-out in glass. Available in chrome or brass finishes. Customers needing extra blank keys can order Cat. No. EH9KEY. Glass fabrication instructions are included.

CAT. NO. RANDOM KEYS	FINISH
EH90	Chrome
EH92	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires cut-out notch in glass.

## CRL Through-Glass Plunger Lock

- For 3/16" or 1/4" (5 mm or 6 mm) Swinging Glass Doors

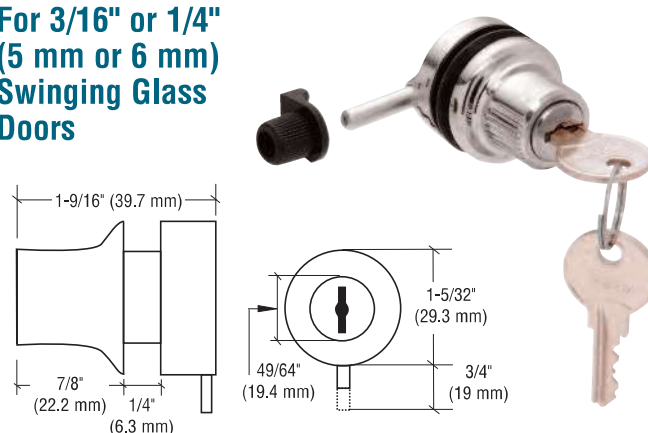

CRL's Through-Glass Plunger Lock will work on swinging doors, and accommodates 3/16" (5 mm) or 1/4" (6 mm) thick glass. A black plastic "press-in keeper" is included, and acts as a glass stop and pin receptacle. The Lock's case and cylinder are zinc die cast. Gaskets and hole drilling template are included. Requires a 1" (25 mm) drilled hole in the glass for installation. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY.


CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0910CH	0910CHKA	Chrome
0910BC	0910BCKA	Black Chrome
0910BR	0910BRKA	Brass

Minimum order: 1 each. Finishes can be combined for quantity pricing.  
Requires 1" (25 mm) diameter hole.

## CRL FixtureGuard Plunger Lock

- **1/2" (12.7 mm) Long End Shaft Blocks the Secondary Door of a Display Case**
- **Mounts to the Frame of Sliding Display Case Doors**

The FG776 FixtureGuard Lock is a standard push lock where the end shaft blocks the movement of the secondary door on a display case. The Lock is mounted on the frame of the display case. Sold with a Medium Security Cylinder. Includes two keys. Minimum order is one each.

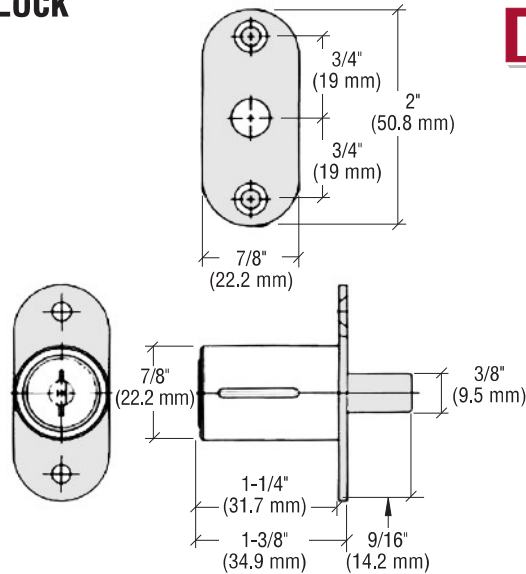

**new**




CAT. NO. FG776

## CRL Deadbolt Drawer Lock

- **Deadlock Designed for Drawers and Cabinets**
- **Key Can Be Removed in the Unlocked Position**
- **Includes Two Medium Security Keys**

The FG777 FixtureGuard Lock is a Medium Security Deadbolt Lock that may be used on a drawer or a cabinet door where attended security is not required. The Lock must be unlocked and locked each time to maintain increased security. Minimum order is one each.

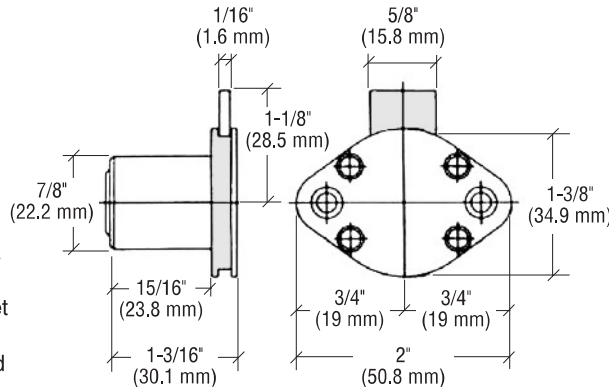

**new**




CAT. NO. FG777

## CRL Springlatch Drawer Lock

- **Medium Security Spring Latch**
- **Allows Drawers and Cabinets to Lock Without a Key**
- **Includes Two Medium Security Keys**

The FG778 FixtureGuard Spring Latch Drawer Lock is the ultimate lock for medium security needs. Never worry about leaving the drawer unlocked again. The design of the spring latch is such that all that is needed to lock the drawer is to close it. In this way the valuables in the drawer are never left unsecured. This is highly desirable on overflow stock drawers at a busy retailer.

Cat. No. FGSTR1KE is designed to hold the FG778 latch in a secure and locked position. Minimum order is one each.

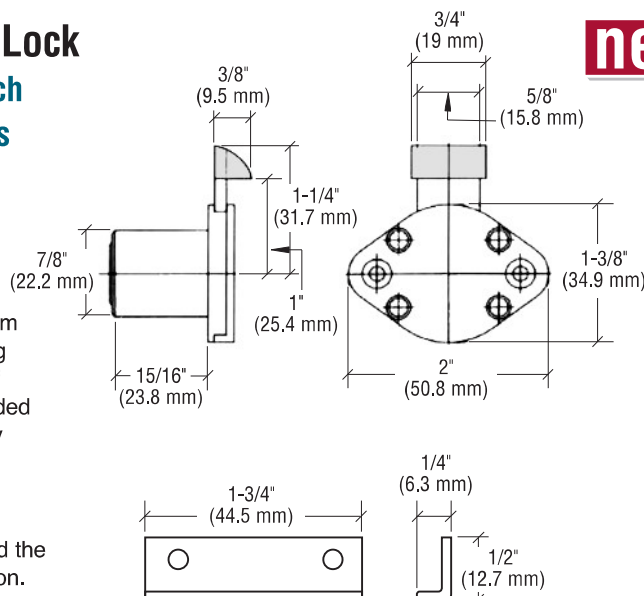

**new**



CAT. NO. FG778




CAT. NO. FGSTR1KE

## CRL T-Bolt Plunger Lock

**new**

- Mounts on the Frame of Sliding Display Case Doors
- An Additional Mounting Plate Prevents the Display Case Doors From Being Spread
- Key Can Only Be Removed in the Locked Position
- Includes Two Medium Security Keys

The FG779 FixtureGuard T-Bolt Plunger Lock provides a higher level of security than normal plunger type locks. By changing the end shaft and providing a fitting plate, the FG779 T-Bolt locks the case doors together and prevents them from being slid open or spread apart. Sold with a Medium Security Cylinder. Includes two keys. Minimum order is one each.

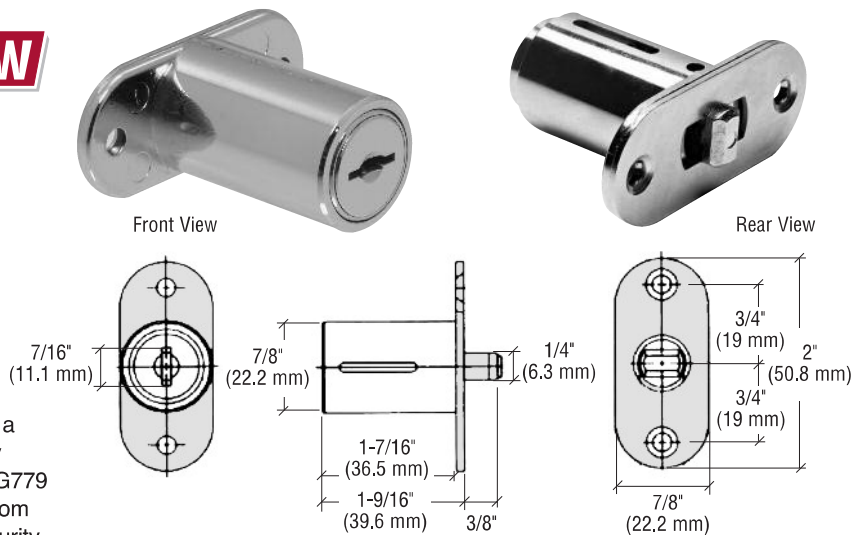


CAT. NO. FG779

## CRL Sliding Glass Door Plunger Lock

**new**

- Through-the-Glass Push Lock With a Medium Security Cylinder
- Includes a Plastic Spacer and Chrome Collar for Through-the-Glass Mounting
- Key Can Only Be Removed in the Locked Position
- Includes Two Medium Security Keys

The FG780 FixtureGuard Lock is a standard push lock designed to be mounted through a 1-1/4" (32 mm) hole in the glass display case door. The plastic spacer and chrome collar provide push lock type security without the need for a case frame for mounting. The 1/2" (12.7 mm) end shaft blocks the opposing door from sliding past, securing the display case. Sold with a Medium Security Cylinder. Minimum order is one each.

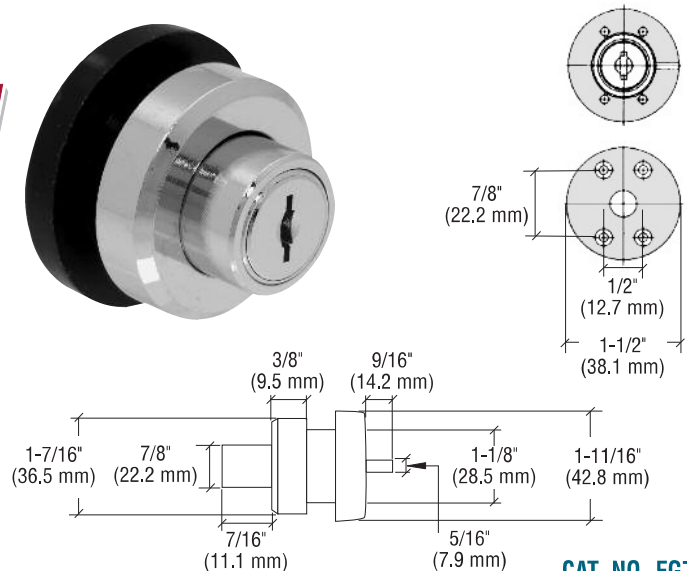

CAT. NO. FG780

## CRL Cam Locks

**new**

- Designed for Use on Cabinets and Drawers
- Key Can Only Be Removed When in the Locked Position
- Includes Two Medium Security Keys

This uniquely designed Cam Lock is available for use on cabinet doors and drawers. Available with your choice of seven different cams. Sold with a Medium Security Cylinder. Includes two keys.

**NOTE:** Customer to specify cam style which is ordered separately.

### LOCKS


CAT. NO.	BARREL LENGTH (K)
FG403S	5/8" (15.8 mm)
FG403M	7/8" (22.2 mm)
FG403L	1-1/8" (28.5 mm)

Minimum order: 1 each.

### CAMS


CAT. NO.	TYPE	SIZE (A)
CAM01	Straight	1" (25.4 mm)
CAM02	Straight	1-1/4" (31.8 mm)
CAM03	Straight	1-3/4" (44.4 mm)
CAM04	Straight	1-1/2" (38.1 mm)
CAM05	Offset	1-3/8" (34.9 mm)
CAM15	Hook	1-1/2" (38.1 mm)
CAM16	Offset	2" (50.8 mm)

Minimum order: 10 each.

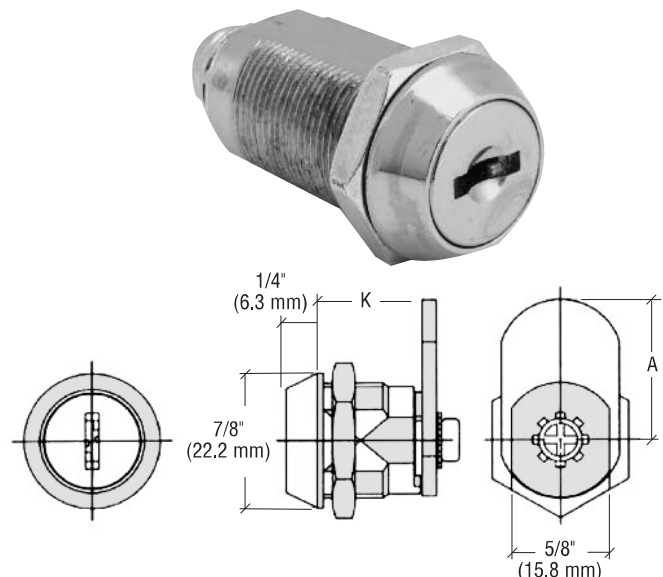

## CRL Sliding Door Lock

- No Drilling Through H-Bar Cross Web
- 1" (25.4 mm) Long Plunger Fits All H-Bar Extrusions

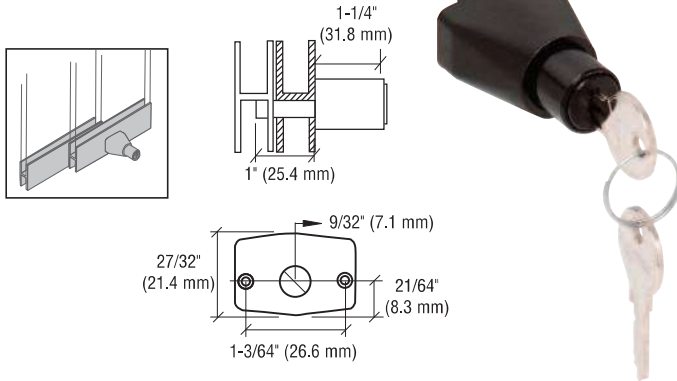


This CRL Sliding Door Lock requires a 5/16" (8 mm) diameter hole, making it easy to install without notching the glass. Lock is secured by two screws from the back side of the H-Bar. Available in black and satin chrome finishes, keyed alike or randomly. Blank Keys are available to make duplicate keys. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0911BC	0911BCKA	Black Chrome
0911SC	0911SCKA	Satin Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 5/16" (8 mm) diameter plunger hole.

## CRL Keymatic Sliding Door Plunger Lock

- Fits Doors Up to 1-1/32" Thick
- Polished Nickel Finish

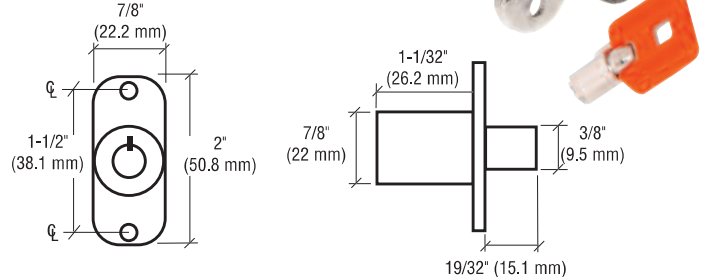


The CRL Keymatic Sliding Door Plunger Lock can be installed to engage either by pushing into a drilled hole, or resting against the edge of the back sliding door. This Lock is excellent for any sliding door application other than glass doors, for which we have the Cat. No. KML41GL Sliding Glass Door Plunger Lock (see page 417G). Lock features captive operation so key can only be removed in locked position. Fits doors up to 1-1/32" (26 mm) thick. The exclusive Keymatic Cylinder allows combination changes using the Keymatic Master Combination Key (see page 430G).

CAT. NO.	DESCRIPTION	FINISH
KML41	Plunger Lock	Polished Nickel

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 7/8" (22 mm) diameter barrel hole and 13/32" (10 mm) diameter plunger hole.

## CRL Cam Lock

- Comes With Both Straight and Offset Cams
- Available in Several Finishes
- Easy to Install

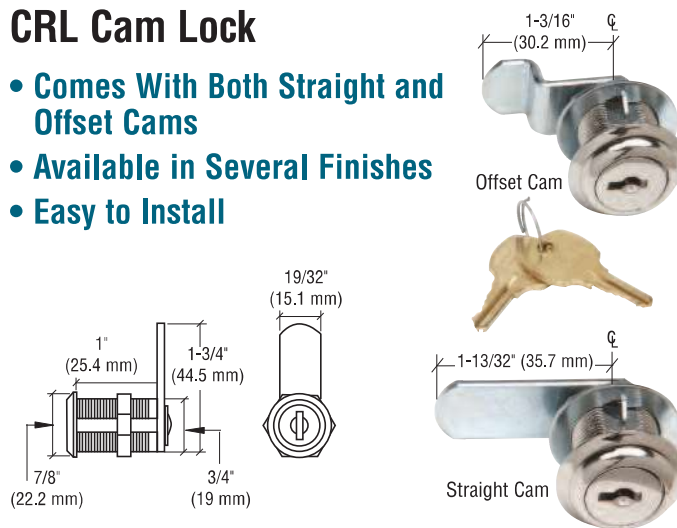


CRL's Cam Lock is easy-to-install on hinged showcase and cabinet doors made from CRL D626, D644, or D673 Extrusions for hinged glass or mirrored doors. Available randomly keyed or keyed alike. Comes with both straight and offset cams, plus two keys.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
D805CH	D805CHKA	Chrome
D805BN	D805BNKA	Brushed Nickel
D805BRZ	D805BRZKA	Bronze
D805GP	D805GPKA	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Plunger Lock

- For 1/4" or 3/8" (6 or 10 mm) Thick Glass
- Supplied With Stop Plate

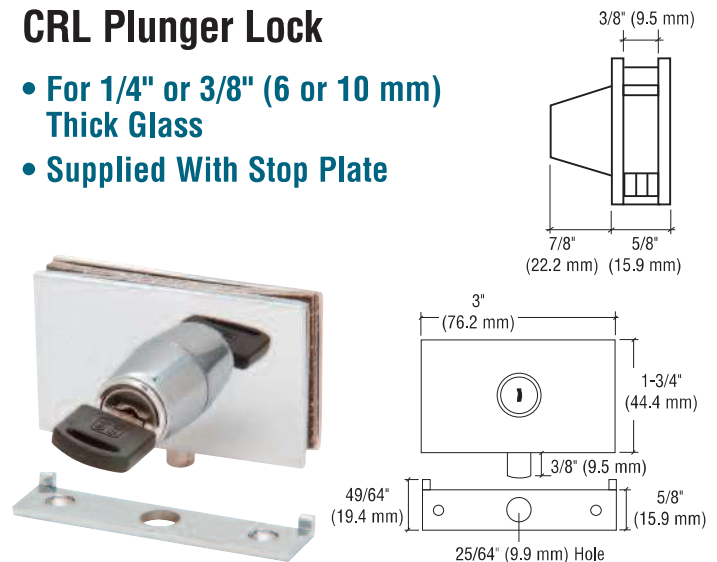

CRL's Plunger Locks will fit 1/4" or 3/8" (6 or 10 mm) thick glass. Tightening is done by means of a counterplate (included). The key can be removed in the open and locked position. Lock is supplied with gaskets, template, and stop plate. Customers needing extra blank keys can order Cat. No. LKEY.


CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
EH100	EH100KA	Brass
EH102	EH102KA	Chrome

Minimum order: 1 each. Finishes can be combined for quantity pricing.  
Requires glass notch cut-out.



## CRL Double Door Cam Lock

- For 3/16" or 1/4" (5 or 6 mm) Glass
- Overlapping Lip Secures the Second Door

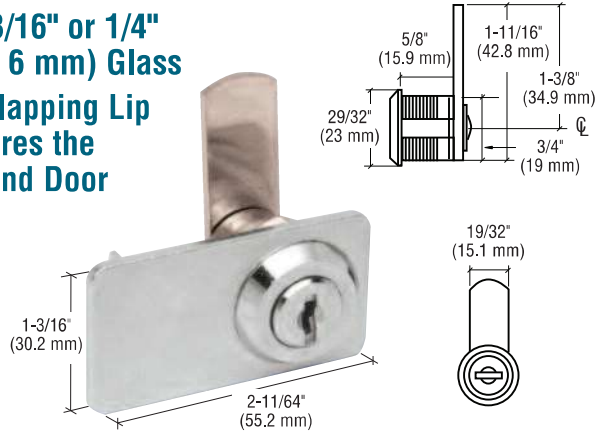


CRL's Double Door Cam Lock is for double swinging doors, and has an overlapping lip that protrudes and serves to secure the second door (for maximum efficiency both doors should have a stop). Case, cylinder, and plate are zinc die cast. This Lock will fit 3/16" or 1/4" (5 to 6 mm) thick glass. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY. Template included.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0916CH	0916CHKA	Chrome
0916BC	0916BCKA	Black Chrome
0916BR	0916BRKA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Combination Lock

- For Framed and Wood Doors
- 1000 Combination Settings

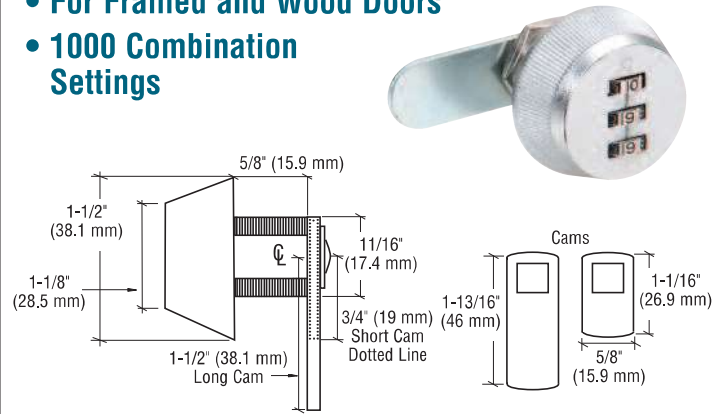


CRL's Combination Locks can be used in wood drawers or cabinets, as well as in framed and hinged doors using Cat. No. D673 Single Channel extrusion. The locks will accommodate a maximum panel thickness of 5/8" (15.8 mm). The Combination Locks come with one long cam, one short cam, a prong washer for wood installations, a cylinder nut, screw and lock washer. Installation and combination instructions are included.

CAT. NO.	DESCRIPTION
7850S	Chrome Plated Lock
7850B	Black Plated Lock

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Round Top Swinging Glass Door Lock

- Chrome or Brass Finishes

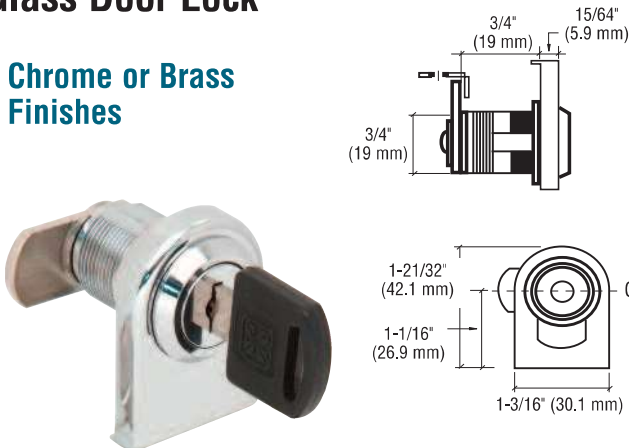


This CRL Round Top Swinging Glass Door Lock is easy to install, requiring only a 3/4" (19 mm) hole in the glass to accommodate the cylinder. These attractive cam style Locks bring added security to cabinets with glass doors up to 1/4" (6 mm) thick. Locks come complete with two keys, front plate, strike plate, straight cam, washer, and hex nut. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK34	LK34KA	Chrome
LK36	LK36KA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL L.H. and R.H. Swinging Door Lock

- Chrome or Brass Finishes

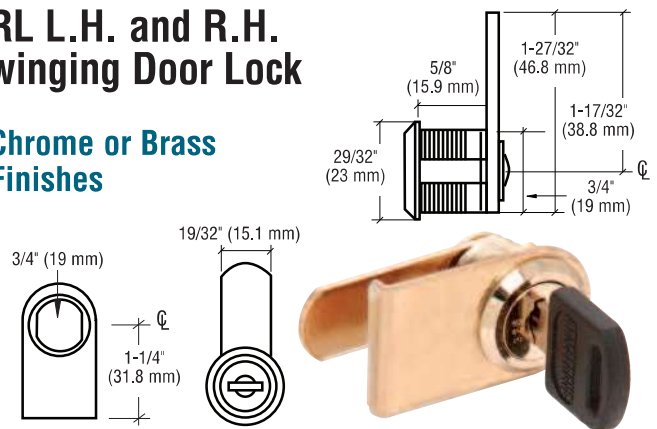

CRL Chrome Plated Locks for Single Swinging Glass Doors in cabinets are available in both left and right hand configurations. Easy to install after drilling a 3/4" (19 mm) hole, these attractive cam style Locks will bring added security to cabinets with single glass doors up to 1/4" (6 mm). Locks come complete with two keys, front plate, strike plate, straight cam, washer, and hex nut. Customers needing extra blank keys can order Cat. No. LKEY.

### L.H. SWINGING DOOR LOCK

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK18	LK18KA	Chrome
LK20	LK20KA	Brass


### R.H. SWINGING DOOR LOCK

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK22	LK22KA	Chrome
LK24	LK24KA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Lock for Double Door Cabinet

- For Cabinets With Double Swinging Doors
- Chrome or Brass Finishes

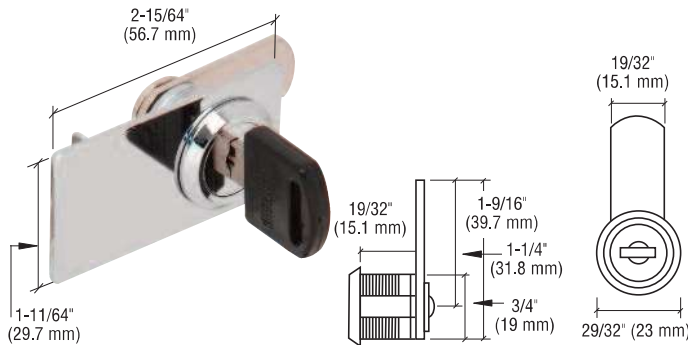


CRL Plated Locks for Double Swinging Glass Doors in Cabinets are available in both chrome and brass plated finishes. Easy to install after drilling a 3/4" (19 mm) hole, these attractive cam style Locks will bring added security to cabinets with double glass doors up to 1/4" inch (6 mm) thick. Locks come complete with two keys, front plate, strike plate, straight cam, washer, and hex nut. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK30	LK30KA	Chrome
LK32	LK32KA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Cam Lock for Wood Doors

- For Use in Wood or Composite Doors Up to 3/4" (19 mm) Thick
- Nickel Plated Finish

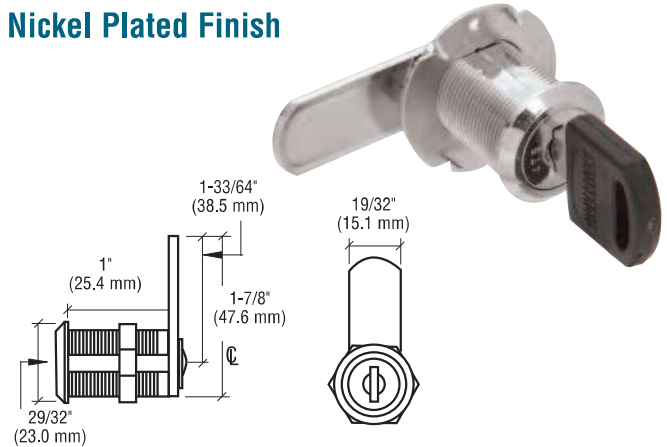


CRL Cam Locks for Wood Doors have a bright nickel plated finish. Simple installation requires drilling a 3/4" (19 mm) hole in wood or composite doors up to 3/4" (19 mm) thick. They can also be used as Locks in desk or countertop drawers. Locks come with two keys, one straight and one offset cam, one washer, and one nut. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK56	LK56KA	Nickel Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires 3/4" (19 mm) diameter hole.

## CRL Keymatic Door and Drawer Cam Lock

- Keymatic Cylinder Allows Instant Combination Changes
- Fits Drawers and Doors Up to 5/8" (16 mm) Thick

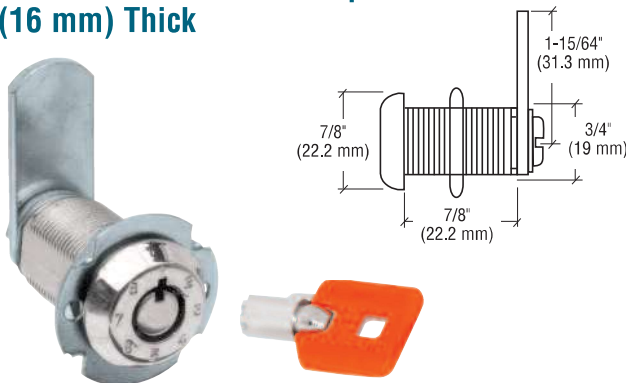


The CRL Keymatic Cam Lock for Doors and Drawers up to 5/8" (16 mm) thick has the Keymatic Multi-Combination Cylinder. The polished nickel finish Lock comes with a spur washer for mounting in wood doors and drawers, two Number One Combination Keys (Cat. No. KMK1), and one Master Combination Change Key (Cat. No. KMKM). Keys for other combinations (Cat. No. KMK2-KMK8) must be ordered separately. For additional selections of CRL Keymatic Locks and instructions on keys and combinations, refer to page 430G. Requires 3/4" (19 mm) diameter hole. Minimum order is one each.

**CAT. NO. KML13**

## CRL Cam Lock With Stop Plate

- For 1/4" or 3/8" (6 to 10 mm) Glass
- Chrome or Brass Finishes

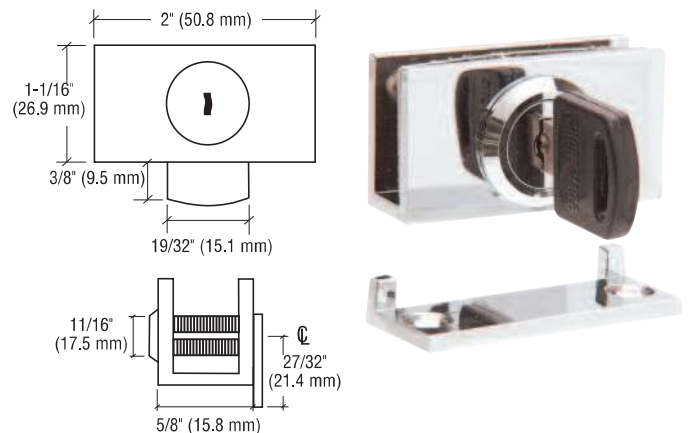

This Cam Lock is suitable for 1/4" to 3/8" (6 to 10 mm) thick glass. Tightening is done by means of two plastic tipped screws. Lock is supplied with gaskets and template. A matching Stop Plate is included with each lock.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
EH96	EH96KA	Brass
EH98	EH98KA	Chrome


Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires a notch in the glass.

## CRL Momentary Contact Switch Lock

- Current Rating of 4A@125VAC, 2A@200VAC
- Medium Security Keyed Lock
- Includes Two Keys

**Contact Resistance:** 10 milli - Ohms. Max.  
**Insulation Resistance:** 500 Meg - Ohms. Min.  
**Dielectric Strength:** 1500 Vac 1 minute

The GM302 is a Momentary Contact Switch Lock perfect for those applications that require a key to be turned momentarily to make electrical contact. Minimum order is one each.

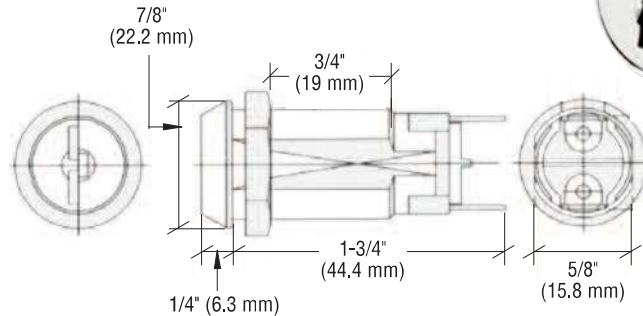

**new**




CAT. NO. GM302X

## CRL CamGuard Cam Locks

- Virtually Pick Proof
- Available in Three Barrel Lengths

The GM410 utilizes the same keys as our GM400 Lock, and can be integrated into existing key systems. The main difference is the addition of sidebars making the lock pick proof. The GM410 is available in 5/8", 7/8", and 1-1/8" (15.8, 22.2, and 28.5 mm) lengths. Each Lock comes with two keys.

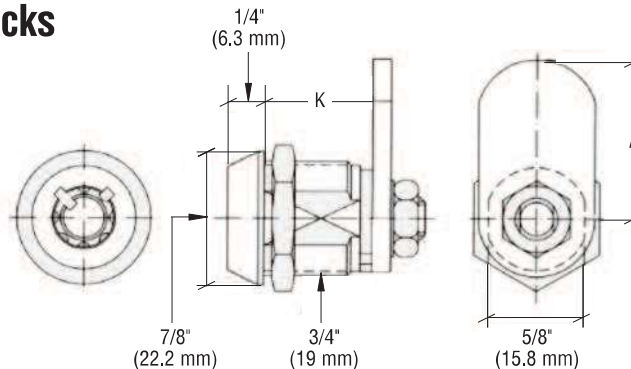

**new**



### LOCKS

CAT. NO.	BARREL LENGTH (K)
GM410SX	5/8" (15.8 mm)
GM410MX	7/8" (22.2 mm)
GM410LX	1-1/8" (28.5 mm)

Minimum order: 1 each.

### CAMS

CAT. NO.	TYPE	SIZE (A)
CAM11	Straight Cam	1-3/8" (34.9 mm)
CAM12	Straight Cam	1-1/2" (38.1 mm)
CAM13	Offset Cam	1-5/8" x 1/4" (41.2 x 6.3 mm)
CAM14	Offset Cam	2-1/4" x 3/8" (57.1 x 9.5 mm)

Minimum order: 10 each.

### CAMS


CAT. NO.	TYPE	SIZE (A)
CAM18	Offset Cam	1-3/16" x 1/4" (30.1 x 6.3 mm)
CAM21	Offset Cam	1-3/16" x 1/8" (30.1 x 3.2 mm)
CAM22	Double Ended Cam	1-1/4" (31.8 mm)
CAM23	Double Ended Cam	3/4" (19 mm)
CAM24	Offset Cam (DE)	1-1/2" x 3/8" (38.1 x 9.5 mm)

Minimum order: 10 each.

## CRL CamGuard Cam Locks

- Perfect for Drawers or Cabinets
- Unique Key System

This tubular keyed lock is perfect for wood cabinets or drawers where security is a concern. Available in three barrel lengths to accommodate various materials and comes with an 1-1/4" (38.1 mm) long cam and two keys. Other cam options are also available and may be purchased separately.

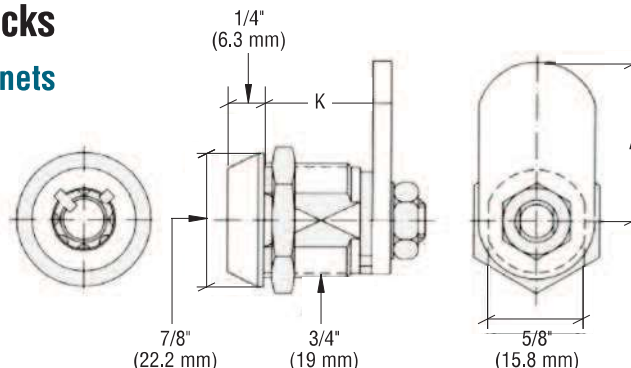

**new**



### LOCKS

CAT. NO.	BARREL LENGTH (K)
GM400SX	5/8" (15.8 mm)
GM400MX	7/8" (22.2 mm)
GM400LX	1-1/8" (28.5 mm)

Minimum order: 1 each.

### CAMS

CAT. NO.	TYPE	SIZE (A)
CAM11	Straight Cam	1-3/8" (34.9 mm)
CAM12	Straight Cam	1-1/2" (38.1 mm)
CAM13	Offset Cam	1-5/8" x 1/4" (41.2 x 6.3 mm)
CAM14	Offset Cam	2-1/4" x 3/8" (57.1 x 9.5 mm)

Minimum order: 10 each.

### CAMS

CAT. NO.	TYPE	SIZE (A)
CAM18	Offset Cam	1-3/16" x 1/4" (30.1 x 6.3 mm)
CAM21	Offset Cam	1-3/16" x 1/8" (30.1 x 3.2 mm)
CAM22	Double Ended Cam	1-1/4" (31.8 mm)
CAM23	Double Ended Cam	3/4" (19 mm)
CAM24	Offset Cam (DE)	1-1/2" x 3/8" (38.1 x 9.5 mm)


Minimum order: 10 each.

## CRL Mini-Cam Lock

- Available in Two Barrel Lengths
- Pick Resistant



**new**

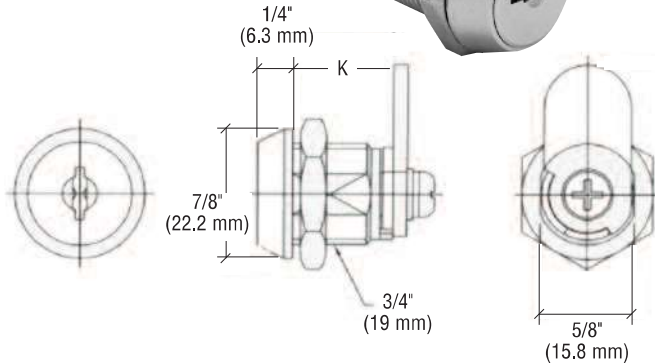

CRL's Mini-Cam Lock is ideal for small cabinets or thin walled drawers that need to be secured. This pick resistant Lock comes with two cams, 1/2" and 1" (12.7 and 25.4 mm) long, and two keys.

### CAT. NO.

### BARREL LENGTH (K)

GM1230SX  
GM1230LX

3/8" (9.5 mm)  
1/2" (12.7 mm)


Minimum order: 1 each.

## CRL Shipping Lock

- Standard 5/8" (15.8 mm) Diameter



**new**

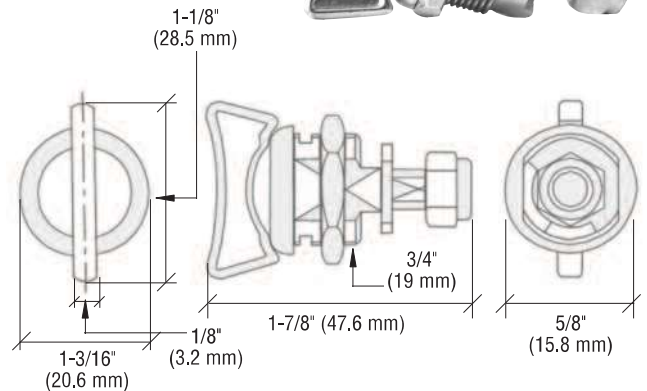

The GM742 is a standard 5/8" (15.8 mm) shipping lock. This Lock can be utilized in any application not requiring security, but instead keeping doors or drawers in a closed position. Accepts standard Square D Cams. Minimum order is one each.


CAT. NO. GM742

## CRL Vending Lock

- Tubular Style Key
- Chrome Finish



**new**

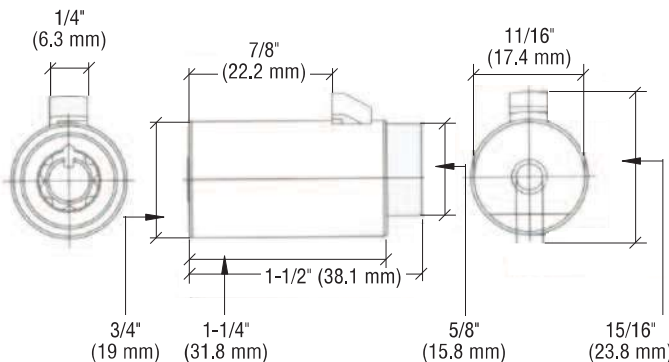

CRL's Vending Lock is used exclusively in the vending machine industry to release the built-in "T" handle which opens vending machines. Minimum order is one each.


CAT. NO. GM501X

## CRL CamGuard Door Lock

- 9/16" (14.2 mm) Cylinder Length
- Chrome Finish



**new**

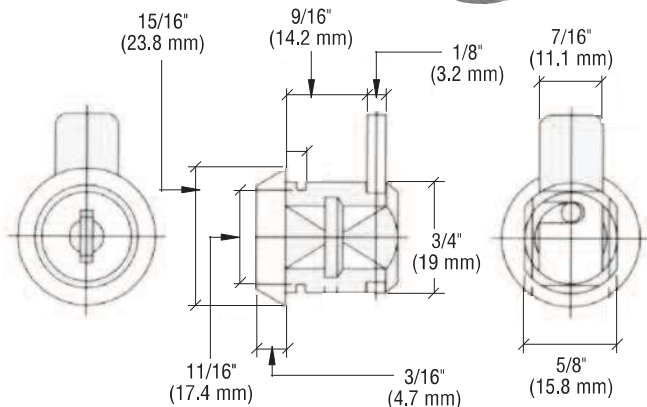


Used on swinging doors, CRL's specialized CamGuard Lock is used on installations requiring a short distance for cam travel. The cam extends through the cylinder body and into the jamb in the locked position. Minimum order is one each.

CAT. NO. GM756X



## CRL Single Door Lock for 1/4" Glass

- No-Drill Installation
- Chrome or Gold Plated Finishes

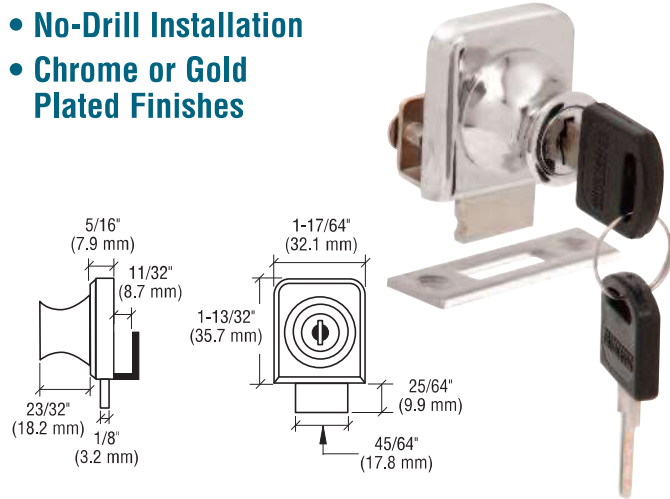


This CRL Cabinet Glass Door Lock adds style and security to stereo cabinets and showcases with glass doors. Lock installation requires no drilling, and they can be used in glass up to 1/4" (6 mm) thick. Locks come complete with two keys and strike plate. Screws for installing strike plate are not included. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK42	LK42KA	Chrome
LK44	LK44KA	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Single Door Lock for 3/8" Glass

- No Drill-Installation
- Chrome or Gold Plated Finishes

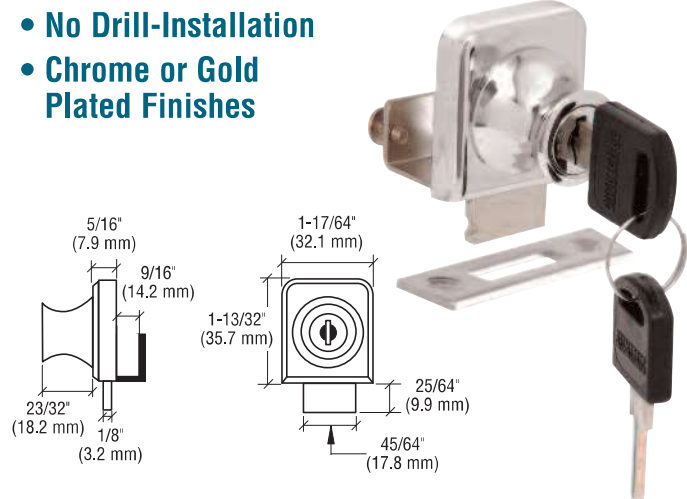

This CRL Lock for 3/8" (10 mm) Single Doors adds style and security to display cabinets and showcases with glass doors. Lock installation requires no drilling, and they are designed to be used with 3/8" (10 mm) thick glass. Locks come complete with two keys and strike plate. Screws for installing strike plate are not included. Customers needing extra blank keys can order Cat. No. LKEY.


CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK342	LK342KA	Chrome
LK344	LK344KA	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL No-Drill Glass Door Locks


- For Single or Double Doors Up to 1/4" (6 mm) Thick
- Three Elegant Finishes
- No Drilling Required

### Double Glass Door Lock

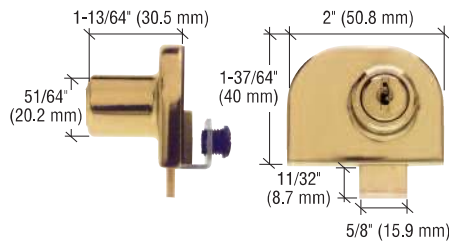


This No-Drill Lock works with double glass doors that meet in the middle. An offset 1/2" (12.7 mm) overlap allows one Lock to hold both doors. Lock includes jamb-mounted strike plate and two keys. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY.

### Single Glass Door Lock

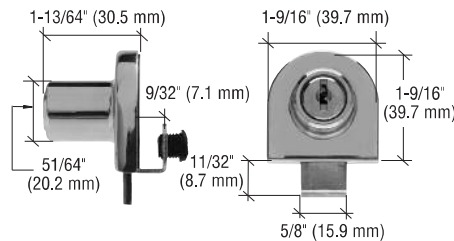

You can mount the Single Door No-Drill Lock on the top or bottom edges of the glass door if used with the jamb-mounted strike plate, or the vertical meeting edge of double glass doors if used with the matching Strike Plate shown at right. Each Lock comes with one jamb-mounted strike plate and two keys. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY.

### Door Mounted Strike Plate

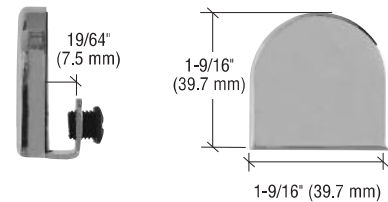

Use the Door Mounted Strike Plate in tandem with the Single Door No-Drill Lock to secure double glass doors in the middle. Size and finish match the Single Door Lock, creating an attractive locking system that can be mounted in seconds anywhere along the vertical meeting edges of the doors. Bottom is notched to receive plunger from Single Glass Door Lock.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
EH212	EH212KA	Chrome
EH214	EH214KA	Black Chrome
EH216	EH216KA	Brass

Minimum order: 1 each. No-Drill Locks can be combined for quantity pricing.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
EH206	EH206KA	Chrome
EH208	EH208KA	Black Chrome
EH210	EH210KA	Brass


Minimum order: 1 each. No-Drill Locks can be combined for quantity pricing.

CAT. NO.	FINISH
EH218	Chrome
EH220	Black Chrome
EH222	Brass

Minimum order: 1 each. Strike Plates can be combined for quantity pricing.

## CRL Clamp-On Lock for 1/4" Double Doors

- No-Drill Installation
- Chrome or Gold Plated Finishes

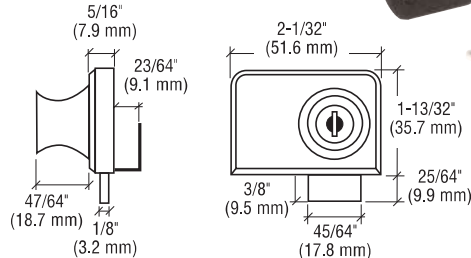


These CRL Cabinet Glass Door Locks are easy to install on cabinets and showcases with double swinging glass doors. No drilling is required, and they can be installed in glass up to 1/4" (6 mm) thick. Locks come complete with two keys and strike plate. Screws for installing strike plate are not included. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>LK46</b>	<b>LK46KA</b>	Chrome
<b>LK48</b>	<b>LK48KA</b>	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Clamp-On Lock for 3/8" Double Doors

- No-Drill Installation
- Chrome or Gold Plated Finishes

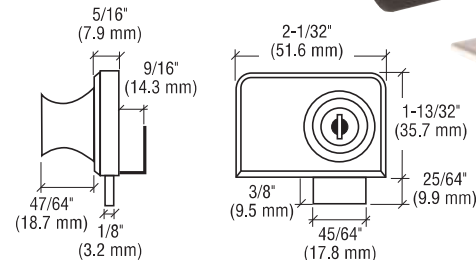


These CRL Locks for 3/8" Double Doors are easy to install on cabinets and showcases with double swinging glass doors. No drilling is required, and they are designed to be installed on 3/8" (10 mm) thick glass doors. Locks come complete with two keys and strike plate. Screws for installing strike plate are not included. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>LK346</b>	<b>LK346KA</b>	Chrome
<b>LK348</b>	<b>LK348KA</b>	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Cabinet Lock for Hinged Glass Door

- Easy Installation - No Need to Drill a Hole in Glass
- Fits Up to 1/4" (6 mm) Thick Glass

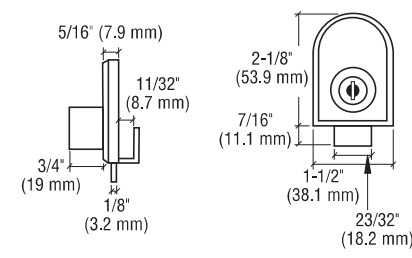


With three beautiful finishes to choose from, CRL's Cabinet Lock for Hinged Glass Doors will add style and security to any showcase or cabinet. Designed for single glass doors, lock installation is easy because no drilling of the glass is necessary. Locks come complete with two keys, strike plate, and mounting plate. Screws for strike plate are not included. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>LK10</b>	<b>LK10KA</b>	Chrome
<b>LK12</b>	<b>LK12KA</b>	Black
<b>LK14</b>	<b>LK14KA</b>	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL No-Drill Showcase Lock

- Quick and Easy to Install
- Use on Any Swinging Glass Door

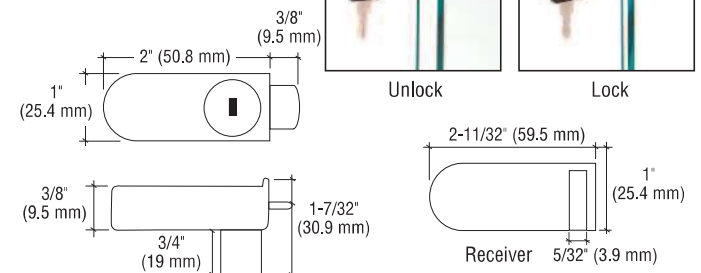


This CRL No-Drill Showcase Lock is designed for swinging glass doors, and is easily installed by peeling off the adhesive liner and placing the Lock and Receiver in the desired location on the glass. No drilling or notching of glass is required. The No-Drill Lock can be used on any thickness of glass door or showcase. Available in several different finishes to match popular showcase extrusions. Can be ordered keyed randomly or alike.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
<b>255BN</b>	<b>255BNKA</b>	Brushed Nickel
<b>255BRZ</b>	<b>255BRZKA</b>	Bronze
<b>255CH</b>	<b>255CHKA</b>	Chrome
<b>255GP</b>	<b>255GPKA</b>	Gold Plated

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Lock for Double Swinging Doors

- For Cabinets With Double Swinging Doors Up to 1/4" (6 mm) Thick
- Chrome or Brass Finishes

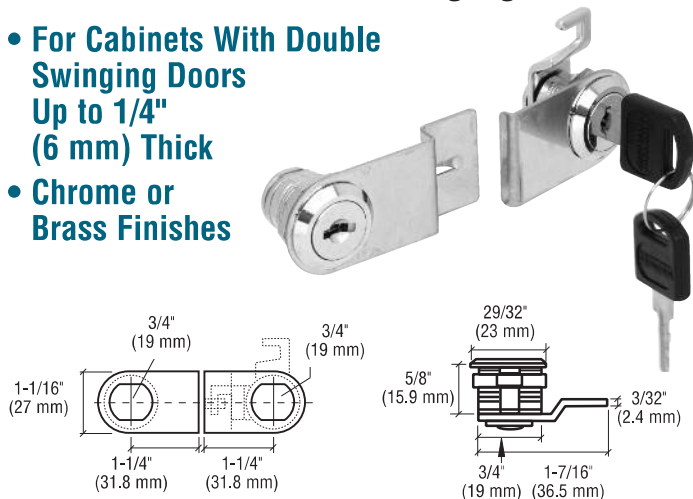


CRL Plated Locks for Double Swinging Glass Doors in Cabinets are available in both chrome and brass finishes. Easy to install in cabinets with double glass doors up to 1/4" (6 mm) thick. Requires drilling of two 3/4" (19 mm) holes. Locks come complete with one operable cylinder; one dummy cylinder with catch; two keys, offset hook cam, two front plates, two washers and two hex nuts. Customers needing extra blank keys can order Cat. No. LKEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK26	LK26KA	Chrome
LK28	LK28KA	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.  
Requires two 3/4" (19 mm) diameter holes.

## CRL "Z" Type SlideGuard Lock

- Glue-On Keyed Lock for Showcases
- Easy to Install

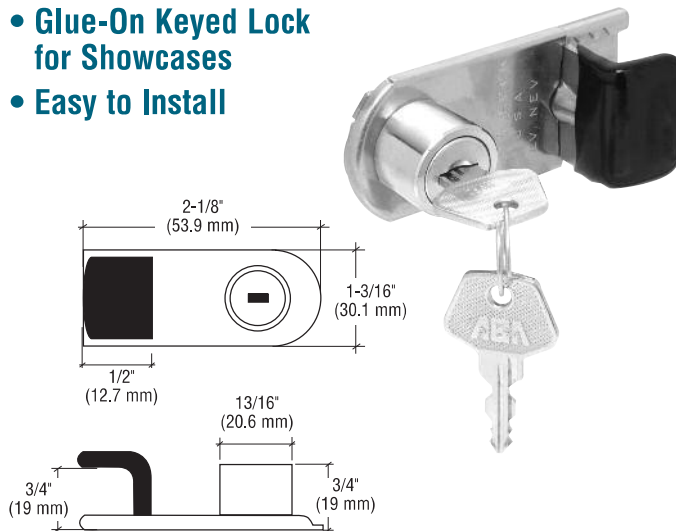


CRL SlideGuard Locks are the perfect choice for your showcase or cabinet sliding glass door security requirements. This Lock operates the same as the Original Type SlideGuard Lock, and bonds permanently to glass or metal with supplied adhesive. The Stop is bent over to a 'Z' configuration to prevent spreading of the glass on showcase installations. Lock is randomly keyed.

CAT. NO.	FINISH
SLGZ14	Stainless Steel

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Original Type SlideGuard Lock

- Glue-On Keyed Lock for Sliding Doors and Windows
- Easy to Install

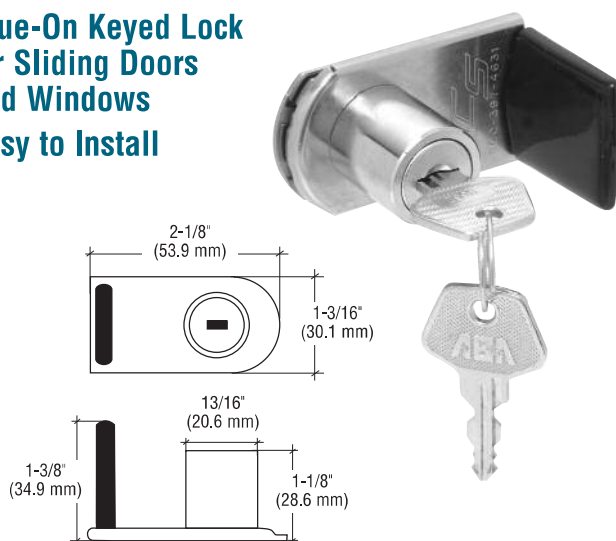


CRL's "Original Type" SlideGuard Lock is designed to be used for sliding doors and windows. The receiver portion of this keyed Lock bonds permanently to glass or metal with supplied adhesive. The locking stop plate slides on and is removable with a key. The large 90 degree stop secures sliding doors or windows. Lock is randomly keyed.

CAT. NO.	FINISH
SLG014	Stainless Steel

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Thumb Turn Type SlideGuard Lock

- Glue-On Thumb Turn Lock for Sliding Doors and Windows
- Easy to Install

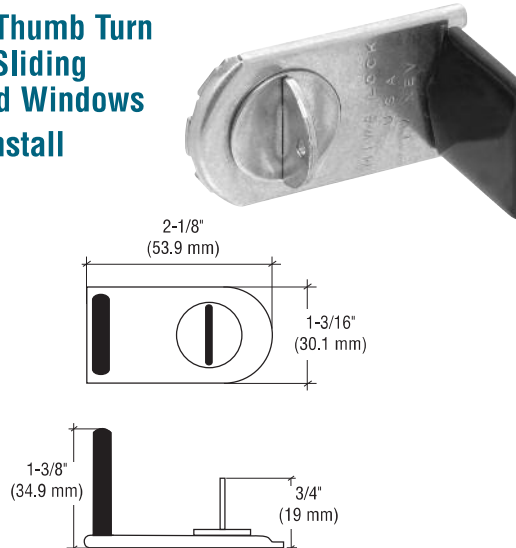

CRL SlideGuard Locks are the perfect choice for your security projects. The receiver portion of this Thumb Turn Lock bonds permanently to glass or metal with supplied adhesive. The stop plate slides on and is removable by rotating the thumb turn. Large 90 degree stop secures sliding doors and windows. Lock is randomly keyed.


CAT. NO.	FINISH
SLGT14	Stainless Steel

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL SlideGuard Reinforced Sliding Door Lock

- For Retail or Residential Applications
- Epoxy Works on Metal, Glass, and Plexi Applications
- Includes Two Medium Security Keys

**new**

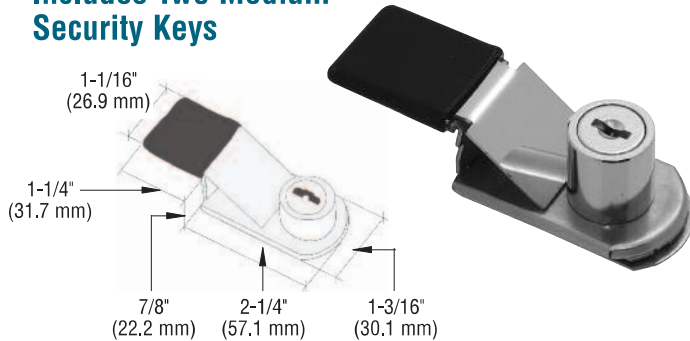

The SLGZR was designed for today's leading retailers and their larger display cases. By adding the reinforcing bracket to the SLGZ, the ZR can be utilized on taller cases with doors up to 3/4" (19 mm) thick. The added length of the bent tailpiece provides even more security against spreading.


CAT. NO.	APPLICATION
SLGZR14	Glass/Plexiglass/Metal
SLGZR16	Wood

Minimum order: 1 each.

## CRL SlideGuard Lock for Double Swinging Doors

**new**

- For Retail or Residential Applications
- Epoxy Works on Metal, Glass, and Plexi Applications
- Includes Two Medium Security Keys

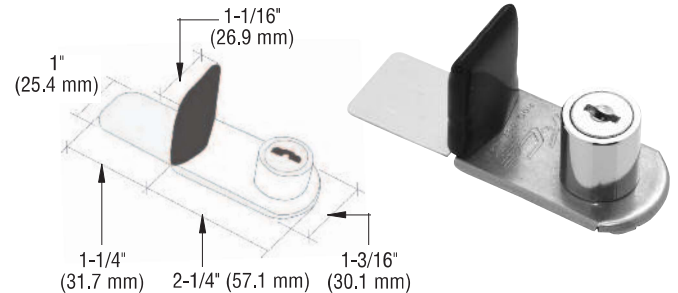

The SLGDP was designed with dual door cabinets that do not have a center divider. With the addition of a horizontal tailpiece and a second baseplate, the SLGDP spans both doors to secure them. The SLGDP could also be used on a single door with the tailpiece recessing into a slot in the jam.


CAT. NO.	APPLICATION
SLGDP14	Glass/Plexiglass/Metal
SLGDP16	Wood

Minimum order: 1 each.

## CRL SlideGuard Thumbturn Lock

- With a Simple Twist the Lock Can Be Removed From Its Mounting Plate
- Manual Thumbturn Eliminates the Need for Keys

**new**

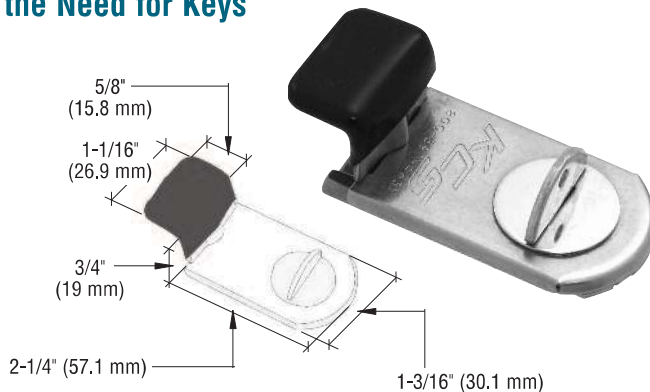

The SLGTZ enables truck, boat, and RV owners the same ease of use as the SLGT provides homeowners. With the added security of the bent tailpiece, the lock prevents spreading of the glass. The perfect solution for that rear truck window.


CAT. NO.	APPLICATION
SLGTZ14	Glass/Plexiglass/Metal
SLGTZ16	Wood

Minimum order: 1 each.

## CRL SlideGuard Adhesive Kits

**new**

- Used Exclusively on Key Control Specialists Security Locks
- Very High Peel Strength
- Includes Adhesive and an Application Stick

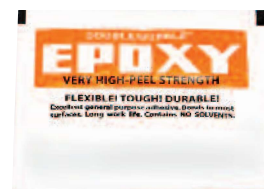

CRL Double/Bubble® Epoxy is a flexible, tough, and durable vibration resistant adhesive that is easily mixed and applied. High peel and shear strengths make this Epoxy the only choice for CRL's SlideGuard Series Showcase Locks. It bonds to glass, metal, acrylic, polycarbonate, polystyrene, ABS nylon, wood, masonry, and rubber. It is gray in color, with handling strength in 18 hours. Net weight per pouch is 3.5 grams (.12 oz). Minimum order is one each.

CAT. NO. SLGLA



# CRL Keymatic Series Showcase and Cabinet Locks

Keymatic Locks combine high security with the ability to select eight different keys to operate each lock. The Master Combination Key allows you to change the Lock to accept any one of the eight keying combinations. This lets you change combinations between shift changes, or in cases where a key might have become lost or stolen. The quick combination change maintains security with no lost time for Lock replacements.

Each Keymatic Lock comes with a Master Combination Change Key (Cat. No. KMKM), and two No. 1 Combination Keys (Cat. No. KMK1) for basic Lock functions. You may change cylinder combinations with the gold colored Master Combination Key to use any of the other seven Combination Keys (Cat. Nos. KMK2-KMK8).

There are four Keymatic Lock varieties, and they all use the exclusive Keymatic Cylinder for superior security and wear resistance. All Keymatic Locks have a U.S.14 bright polished nickel finish. Optional finishes are satin nickel and bright polished brass (available on special order).

## Keymatic Cylinder

16 pin tumblers of stainless steel to resist wear and rounding (eight in the front and eight in the rear).



## Captive Keys

Captive keying feature assures the key can only be removed in the locked position.



## Key Option


With Keymatic you can change the combination to use up to eight different keys to operate the Lock, but only one at a time. **NOTE:** Master Combination Key will not perform Lock functions. It will only change Lock combinations. All Locks are pre-set to No. 1 position.



### KEYS FOR ALL KEYMATIC LOCKS

CAT. NO.	DESCRIPTION
KMKM*	Master Combination Change Key
KMK1	No. 1 Combination Key
KMK2	No. 2 Combination Key
KMK3	No. 3 Combination Key
KMK4	No. 4 Combination Key
KMK5	No. 5 Combination Key
KMK6	No. 6 Combination Key
KMK7	No. 7 Combination Key
KMK8	No. 8 Combination Key

\*To reset combination to match available keys, simply insert the Master Combination Change Key in each number position until it frees movement back to the available key positions.

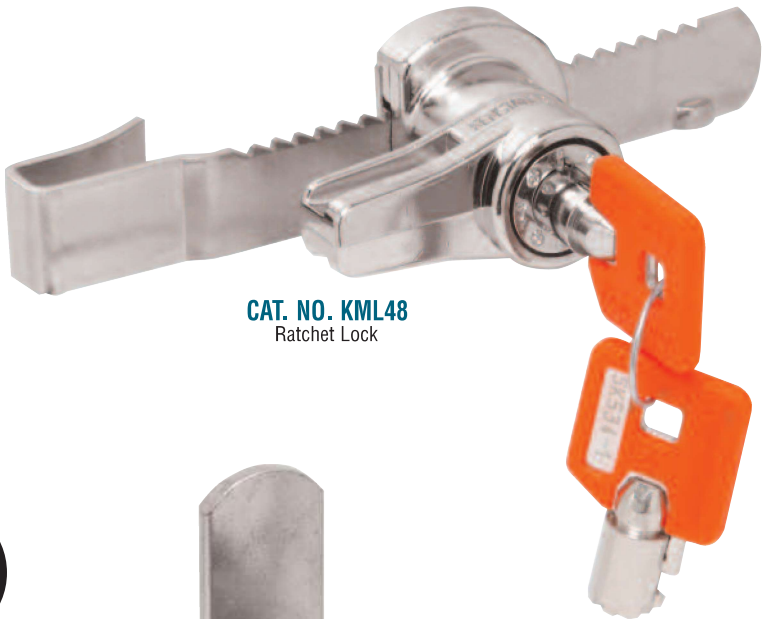

CAT. NO. KML48  
Ratchet Lock



CAT. NO. KML13  
Cam Lock




CAT. NO. KML41GL  
Plunger Lock



CAT. NO. KML41  
Plunger Lock

## CRL Keymatic Door and Drawer Cam Lock

- Fits Drawers and Doors Up to 5/8" (16 mm) Thick
- Keymatic Cylinder Allows Instant Combination Changes


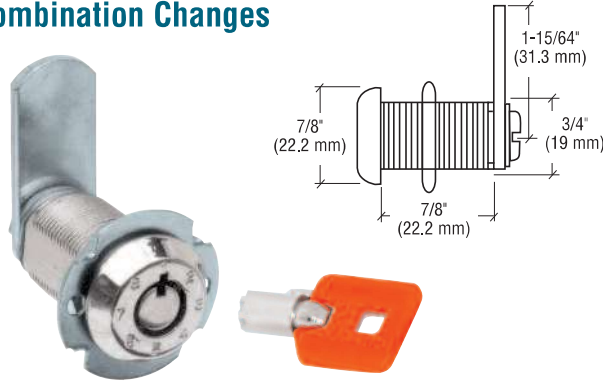


The CRL Keymatic Cam Lock for Doors and Drawers up to 5/8" (16 mm) thick has the Keymatic Multi-Combination Cylinder. The polished nickel finish Lock comes with a spur washer for mounting in wood doors and drawers, two number one Combination Keys (Cat. No. KMK1), and one Master Combination Change Key (Cat. No. KMKM). Keys for other combinations (Cat. No. KMK2-KMK8) must be ordered separately. Requires 3/4" (19 mm) diameter hole. Minimum order is one each. For instructions on keys and combinations, refer to page 430G.

CAT. NO. KML13

## CRL Keymatic Sliding Glass Door Plunger Lock

- Installs Directly Onto Glass Up to 1/2" (12 mm) Thick
- Polished Nickel Finish

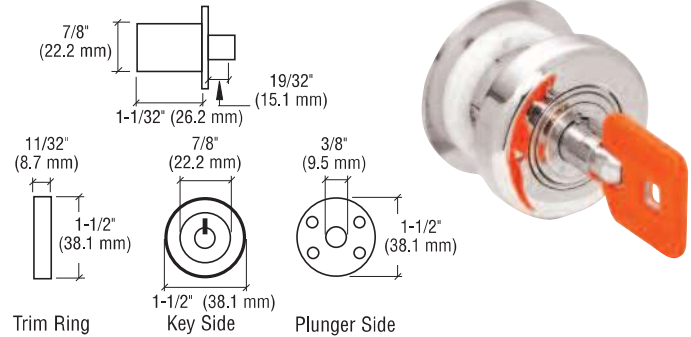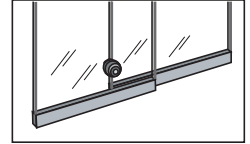


Excellent for any sliding glass door, the CRL Sliding Glass Door Keymatic Plunger Lock is installed directly onto the glass with plunger resting against edge of back sliding door. A 1-1/4" (32 mm) hole must be drilled in the front sliding door to accept the Lock. Will work in doors up to 1/2" (12 mm) thick. A captive operation system allows the key to be removed only in the locked position. Package include the glass cover plate, rubber rings, plastic insert washer and four screws. Minimum order is one each.

CAT. NO. KML41GL

## CRL Keymatic Sliding Glass Door Ratchet Lock

- Multi-Combination Cylinder
- Polished Nickel Finish

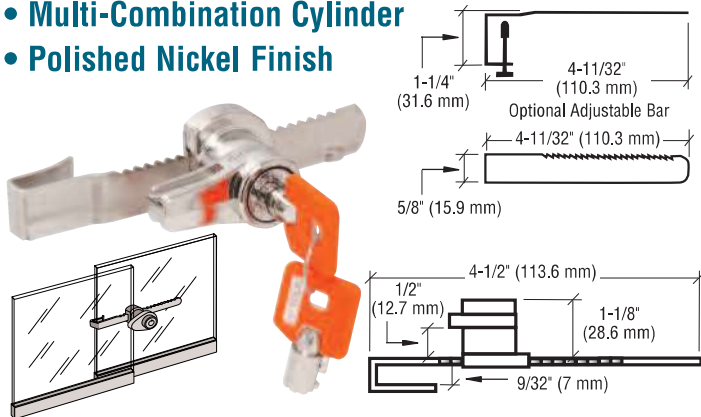


Specifically designed as a top security Lock for sliding cabinet doors. The exclusive Keymatic Cylinder allows combination changes using the Keymatic Master Combination Key. Up to eight different keys may be used to operate the Lock. Maximum door thickness is 1/4" (6 mm) with the standard bar. An Optional Adjustable Bar allows use on doors up to 1/2" (12 mm) thick. The front shoulder on the lock barrel prevents spreading of glass panels to bypass the Lock.

CAT. NO.	DESCRIPTION	MAX. DOOR THICKNESS
KML48	Standard Glass Lock	1/4" (6 mm)
KML48AB	Optional Adjustable Bar	1/2" (12 mm)

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Keymatic Sliding Door Plunger Lock

- Fits Doors Up to 1-1/32" Thick
- Polished Nickel Finish

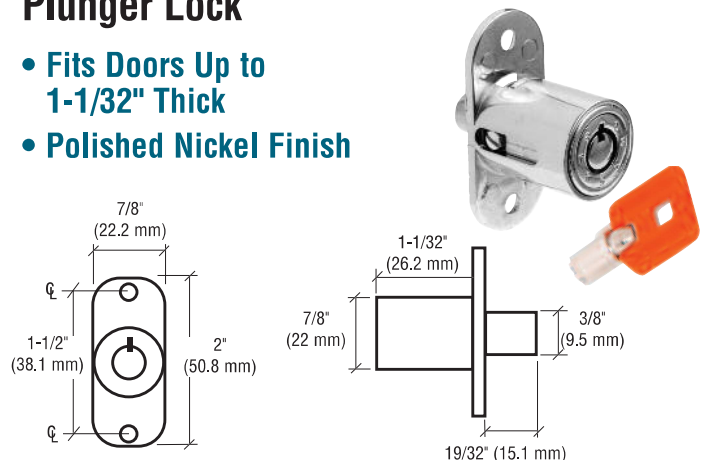


The CRL Keymatic Sliding Door Plunger Lock can be installed to engage either by pushing into a drilled hole, or resting against the edge of the back sliding door. This Lock is excellent for any sliding door application other than glass doors, for which we have the Cat No. KML41GL Sliding Glass Door Plunger Lock above. Lock features captive operation so key can only be removed in locked position. Fits doors up to 1-1/32" (26 mm) thick. The exclusive Keymatic Cylinder allows combination changes using the Keymatic Master Combination Key.

CAT. NO.	DESCRIPTION	FINISH
KML41	Plunger Lock	Polished Nickel

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing. Requires 7/8" (22 mm) diameter barrel hole and 13/32" (10 mm) diameter plunger hole.

## CRL Deluxe Slip-On Showcase Lock for 3/8" and 1/2" Glass

- No Glass Fabrication Required
- For 3/8" or 1/2" (10 or 12mm) Glass

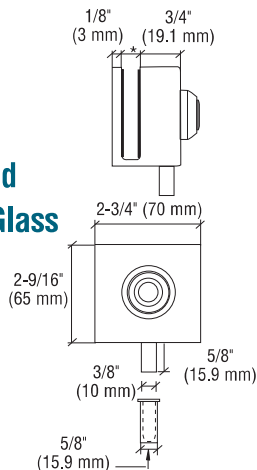

\*Cat. No. 03P38 3/8" (10 mm)  
Cat. No. 03P12 1/2" (12.7 mm)


This CRL Deluxe Slip-On Showcase Lock is designed for 3/8" and 1/2" (10 and 12 mm) glass, and can be installed without drilling or notching the glass. In the locked position, the plunger recesses into a spring loaded receptacle, which is mounted into the cabinet base. This is a perfect Lock for showcases in a high end retail environment or cabinets containing valuable collectables. The Lock comes complete with a finished keeper and set of three keys.

CAT. NO.	GLASS THICKNESS	KEYED	FINISH
03P38	3/8" (10 mm)	Randomly	Chrome
03P12	1/2" (12 mm)	Randomly	Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Glass Mounted Slip-On Patch Lock

- Easy Slip-On Installation and Removal Without Glass Fabrication
- Available for 3/8" or 1/2" (10 or 12 mm) Glass

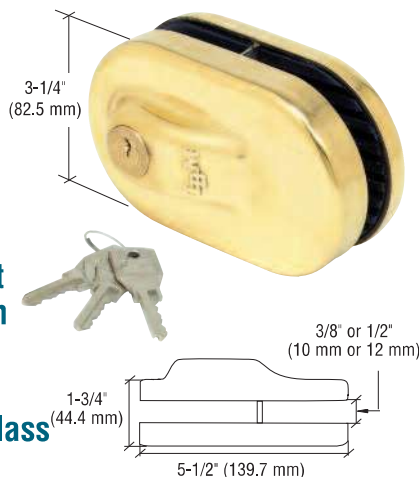


The CRL Glass Mounted Slip-On Patch Lock affords ease of installation, removal and security, without the necessity of a permanent patch lock. This lock can be used as a primary lock, but can also be used in conjunction with a floor lock for extra security. Lock is accessed from one side only by keyed cylinder. Removal of Lock during business hours provides a visually aesthetic frameless appearance. Easy slip-on feature means no glass fabrication is required. Lock is provided with three keys. Customers needing extra blank keys can order Cat. No. SL1PKEY.

CAT. NO.	GLASS THICKNESS	KEYED	FINISH
1NT685CH	3/8" (10 mm)	Randomly	Chrome
1NT685BR	3/8" (10 mm)	Randomly	Brass
1NT686CH	1/2" (12 mm)	Randomly	Chrome
1NT686BR	1/2" (12 mm)	Randomly	Brass

Minimum order: 1 each. All Showcase Lock can be combined for quantity pricing.

## CRL Deluxe Patch Lock for 3/8" and 1/2" Glass

- Does Not Require Glass Fabrication
- For 3/8" or 1/2" (10 or 12 mm) Glass



\*Cat. No. 01P38 3/8" (10 mm)  
Cat. No. 01P12 1/2" (12.7 mm)


This CRL Deluxe Patch Lock slips onto 3/8" or 1/2" (10 or 12 mm) glass and affords ease of installation, removal and security, without the necessity of a permanent patch lock. Lock is accessed from one side only by keyed cylinder. Removal of Lock during business hours provides a visually aesthetic frameless appearance. Easy slip-on feature means no glass fabrication is required. Lock is provided with three keys.

CAT. NO.	GLASS THICKNESS	KEYED	FINISH
01P38	3/8" (10 mm)	Randomly	Chrome
01P12	1/2" (12 mm)	Randomly	Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.

## CRL Glass Door Lock and Receiver

- For Glass Doors From 5/16" to 1/2" (8 to 12 mm) Thick
- Lock Can be Used Glass-to-Wall, or Glass-to-Glass With Optional Matching Receiver

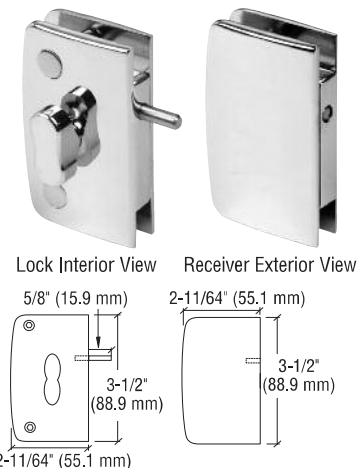

This CRL Glass Door Lock with Indicator is an attractive and practical way to add security and privacy wherever 5/16" to 1/2" (8 to 12 mm) glass doors are used in Glass-to-Wall or 180 degree Glass-to-Glass installations. A turn of the thumbturn on the interior side of the Lock changes the color of the exterior indicator. Emergency access is made possible by a low profile screw on the exterior face. The Lock comes with a wall mounted strike plate, screws, and anchors. Both Lock and Receiver, used for glass-to-glass installations, come with gaskets and hex wrench. Installation and glass fabrication instructions included.

LOCK CAT. NO.	RECEIVER CAT. NO.	GLASS THICKNESS	FINISH
700CCH	701CCH	5/16" to 1/2" (8 to 12 mm)	Chrome
700CBR	701CBR	5/16" to 1/2" (8 to 12 mm)	Brass
700CBN	701CBN	5/16" to 1/2" (8 to 12 mm)	Brushed Nickel
700CORB	701CORB	5/16" to 1/2" (8 to 12 mm)	Oil Rubbed Bronze
700CABR	701CABR	5/16" to 1/2" (8 to 12 mm)	Antique Brass

Minimum order: 1 each. Requires Glass Notch and Cutout.