


CRL Universal Plunger Lock

- For Glass or Wood Doors From 1/4" to 1/2" (6 to 12 mm) Thick
- Available in Three Finishes

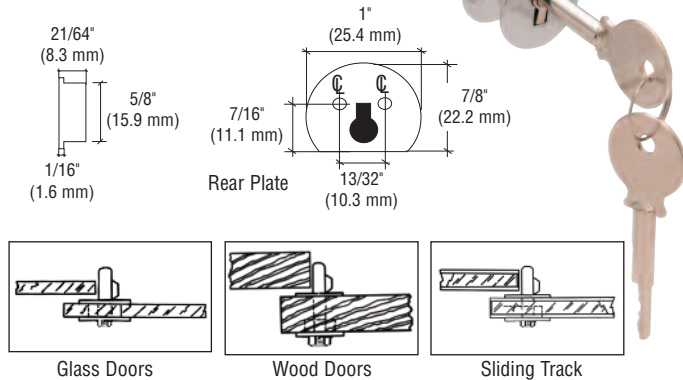


The CRL Universal Plunger Lock will fit panels from 1/4" to 1/2" (6 to 12 mm) thick, making it ideal for use in glass, masonite or wood showcase and cabinet doors. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) hole for installation. Package includes two keys, mounting screws, plates, and a lock tumbler.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
D802C	D802CKA	Chrome
D802BR	-	Brass
D802DU	-	Duranodic Bronze

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.
Requires 11/16" (17 mm) diameter hole.

CRL Sliding Glass Door Lock

- Fits Up to 1/4" (6 mm) Thick Glass
- Chrome Plated

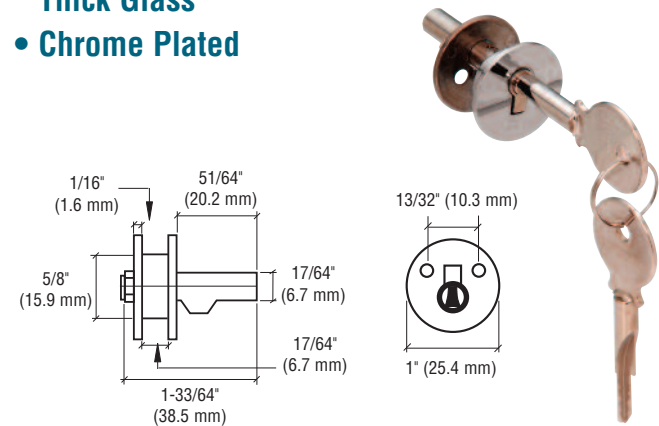


CRL Cabinet Sliding Glass Door Locks have a heavy chrome plating that gives them a rich appearance. The low profile design is favored for showcases where the appearance of locking hardware may be distracting, but security is important. They come complete with two keys, plug locking case, two washers, and two screws. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) diameter hole for installation.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK16	LK16KA	Chrome

Minimum order: 1 each. Finishes can be combined for quantity pricing.
Requires 11/16" (17 mm) diameter hole.

CRL Swinging Door Catch and Lock

- 3-Position Locking System

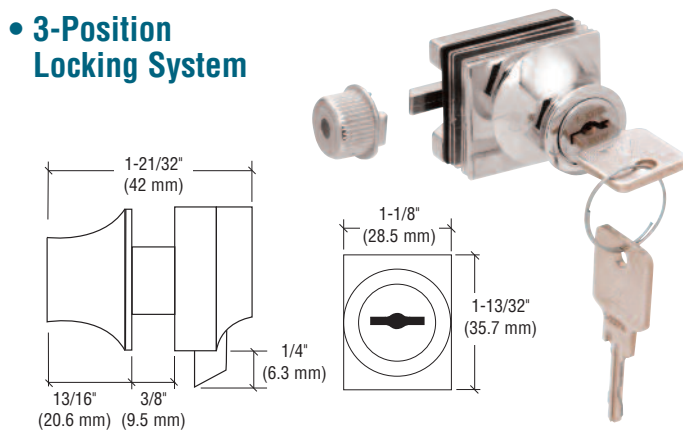


This CRL Swinging Door Catch and Lock has a contoured handle catch. The Lock provides a 3-position system: open, closed, open with self-catching position. The key can be removed in all three positions. For glass or other materials 1/4" to 3/8" (6 to 10 mm) thick. Requires cut-out in glass. Available in chrome or brass finishes. Customers needing extra blank keys can order Cat. No. EH9KEY. Glass fabrication instructions are included.

CAT. NO. RANDOM KEYS	FINISH
EH90	Chrome
EH92	Brass

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.
Requires cut-out notch in glass.

CRL Through-Glass Plunger Lock

- For 3/16" or 1/4" (5 mm or 6 mm) Swinging Glass Doors

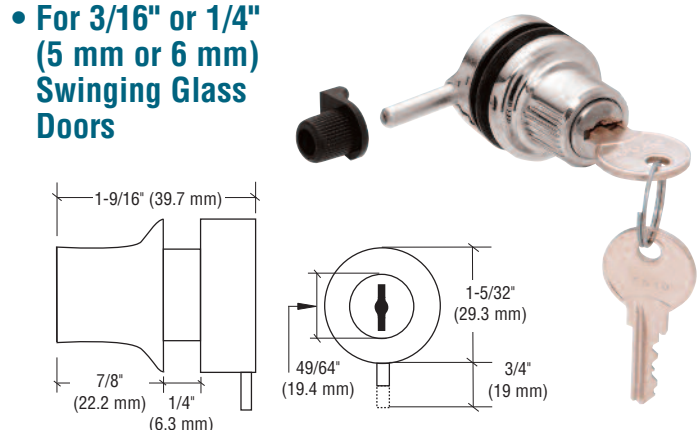

CRL's Through-Glass Plunger Lock will work on swinging doors, and accommodates 3/16" (5 mm) or 1/4" (6 mm) thick glass. A black plastic "press-in keeper" is included, and acts as a glass stop and pin receptacle. The Lock's case and cylinder are zinc die cast. Gaskets and hole drilling template are included. Requires a 1" (25 mm) drilled hole in the glass for installation. For blank replacement keys cut on one side order Cat. No. BKEY; for blank replacement keys cut on two sides order Cat. No. B2KEY.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0910CH	0910CHKA	Chrome
0910BC	0910BCKA	Black Chrome
0910BR	0910BRKA	Brass

Minimum order: 1 each. Finishes can be combined for quantity pricing.
Requires 1" (25 mm) diameter hole.