




CAT. NO. PTH26
 CRL RADIUS LOCK KEEPER PATCH
 (Glass Transom and Sidelite Lock Keeper Patch)
 Centerline in the appropriate position



Recommended

Side Clearances "S"	1/8"
(3mm)	
Top Clearance "T"	1/8"
(3mm) for Glass Transom	

1/4" (6mm) for Regular and Header

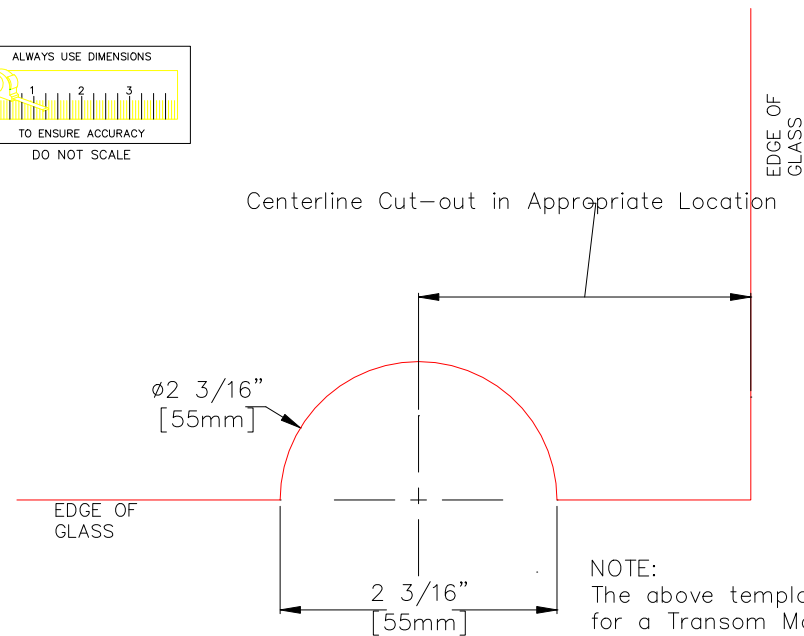

NOTE:

The above template is for a Transom Mounted Lock Keeper. For side mounted Glass Keepers rotate the template 90° either right or left. Centerline the Keeper opposite the Lock.