


CRL Sliding Glass Door Locks

- Easily Installed Ratchet Style Locks
- Popular Plunger Style Locks

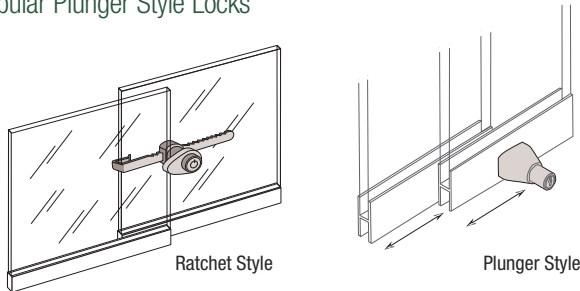

CRL offers a vast selection of Sliding Glass Door Locks for Rolling Track Assemblies. These locks are well designed, functional, and easy to install. Most CRL Locks may be ordered as "Keyed Alike" when it is desired to have one key operate multiple locations.

CRL Sliding Glass Door Lock

- Screw-On Ratchet Bar Holds Lock Onto Glass
- Economical, Easy to Install



This CRL Sliding Glass Door Lock is extremely convenient to open and re-secure. The bar width is 7/16" (11 mm), and it is notched for closed adjustment. The bypassing glass door overlap is 1-1/8" to 3-1/4" (29 to 83 mm). Each Lock is supplied with two Keys. Available in both chrome and brass finishes.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
2040	2040KA	Chrome
2045	2045KA	Brass
2040KEY*	2040KEY*	Replacement Key

Minimum order: 1 each. *Note: Specify key number when placing order for Replacement Key. All Locks can be combined for quantity pricing.

CRL Stick-On Rolling Track Lock

- Available in Three Finishes
- Economical, Easy to Install



CRL Stick-On Track Locks help resist shoplifting. Peel and stick adhesive - easy to install - no holes to drill or special tools required. Locked doors cannot be separated or lifted out. Easy to operate - push in and turn key. Works with doors overlapping 3/4" to 2" (19 to 51 mm).

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
TDK7A	TDK7AKA	Aluminum
TDK7DU	TDK7DUKA	Bronze Anodized
TDK7GA	TDK7GAKA	Gold Anodized

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL "Pick Proof" Sliding Glass Door Lock

- Used On All Types of Sliding Glass Doors
- "Pick Proof" Cylinder



This CRL Sliding Glass Door Lock is perfect for all types of 1/4" (6 mm) thick 'all-glass' sliding doors. The "pick proof" cylinder gives you added security. It is adjustable for overlaps from 1" to 3" (25 to 76 mm). Can be keyed alike on special request. Comes with two Keys.

CAT. NO.	KEYED	FINISH
KV965	Randomly	Chrome Plated

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL "Tamper Proof" Sliding Glass Door Locks

- Used on All Types of Sliding Glass Doors
- Chrome Finish



CAT. NO. 963L
For 1/4" (6 mm) Glass



CAT. NO. 962L
Adjustable for up to 1/2" (12 mm) Glass

CRL "Tamper Proof" Sliding Glass Door Locks have an improved design that includes a housing that prevents spreading of glass doors. Fits any sliding 'all-glass' door, many wood and metal doors, too. They're easily attached - you don't need tools. Durable construction, finished in rustproof chrome. For overlaps of 3/4" to 3-3/8" (19 to 86 mm). Bar width is 5/8" (16 mm). Keyed randomly. Minimum order is one each.

CRL Keymatic Sliding Glass Door Lock

- Multi-Combination Cylinder
- Polished Nickel Finish



Specifically designed as a top security lock for sliding cabinet doors. The exclusive Keymatic Cylinder allows combination changes using the Keymatic Master Combination Key. Up to eight different keys may be used to operate the Lock. Installs with only a screwdriver. Maximum door thickness is 1/4" (6 mm) with the standard bar. An Optional Adjustable Bar allows use on doors up to 1/2" (12 mm) thick. The front shoulder on the lock barrel prevents spreading of glass panels to bypass the Lock.

CAT. NO.	DESCRIPTION	MAX. DOOR THICKNESS
KML48	Standard Ratchet Lock	1/4" (6 mm)
KML48AB	Optional Adjustable Bar	1/2" (12 mm)

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Glass Showcase Lock

- Fits Up to 5/16" (8 mm) Thick Glass Doors
- Screw-On Ratchet Bar to Hold Lock Onto Glass
- Secure, Double-Bit Key



This CRL Glass Showcase Lock is designed to be used on showcases or cabinets with sliding glass doors, and is available randomly keyed or keyed alike. Extremely convenient to open and re-secure. The ratchet bar is secured to one of the glass panels with a plastic tipped thumb screw. The bar width is 13/32" (10 mm). Glass door overlap is 1-1/4" to 4" (32 to 102 mm). Each Lock is supplied with two double-bit keys. For blank replacement Keys order Cat. No. K1033.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
220CH	220CHKA	Chrome

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL "Z" Type Slideguard Lock

- Glue-On Keyed Lock for Showcases
- Easy to Install




CRL Slideguard Locks are the perfect choice for your showcase or cabinet sliding glass door security requirements. This Lock operates the same as the Original Type Slideguard Lock, and bonds permanently to glass or metal with supplied adhesive. The Stop is bent over to a "Z" configuration to prevent spreading of the glass on showcase installations. Locks are randomly keyed.

CAT. NO.	FINISH
SLGZ14	Stainless Steel

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Universal Plunger Lock

- For Glass or Wood Doors From 1/4" to 1/2" (6 to 12 mm) Thick
- Available in Three Finishes



The CRL Universal Plunger Lock will fit panels from 1/4" to 1/2" (6 to 12 mm) thick, making it ideal for use in glass, masonite or wood showcase and cabinet doors. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) hole for installation. Package includes two keys, mounting screws, plates, and a lock tumbler.

NOTE: Works with LK610 and KK610 H-Bars.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
D802C	D802CKA	Chrome
D802BR	-	Brass
D802DU	-	Bronze Anodized

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Original Type Slideguard Lock

- Glue-On Keyed Lock for Sliding Doors and Windows
- Easy to Install




CRL's "Original Type" Slideguard Lock is designed to be used for sliding doors and windows. The receiver portion of this keyed Lock bonds permanently to glass or metal with supplied adhesive. The locking stop plate slides on and is removable with a key. The large 90 degree stop secures sliding doors or windows. Locks are randomly keyed.

CAT. NO.	FINISH
SLG014	Stainless Steel

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Sliding Glass Door Lock

- Chrome Plated
- Fits Up to 1/4" (6 mm) Thick Glass

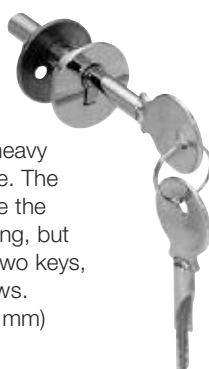

CRL Cabinet Sliding Glass Door Locks have a heavy chrome plating that gives them a rich appearance. The low profile design is favored for showcases where the appearance of locking hardware may be distracting, but security is important. They come complete with two keys, plug locking case, two washers, and two screws. Use CRL Cat. No. AG1116 to drill an 11/16" (17 mm) diameter hole for installation.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK16	LK16KA	Chrome

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Thumb Turn Type Slideguard Lock

- Glue-On Thumb Turn Lock for Sliding Doors and Windows
- Easy to Install



CRL Slideguard Locks are the perfect choice for your security projects. The receiver portion of this Thumb Turn Lock bonds permanently to glass or metal with supplied adhesive. The stop plate slides on and is removable by rotating the thumb turn. Large 90 degree stop secures sliding doors and windows.

CAT. NO.	FINISH
SLGT14	Stainless Steel

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Track Plunger Lock

- Spring Activated Plunger Locks Without Key
- Simple to Install

The CRL Chrome Track Plunger Lock installs easily in track assemblies with sliding glass doors. You can install it in either the top or bottom of the door. The spring-activated design permits locking simply by pushing the plunger without the key. Comes with ferrule and two keys. If the 981 is used with Cat. No.'s D610, D5610 or MC610 H-Bar, the glass will require notching. If the LK610 H-Bar is used, no notching of the glass is required. For replacement Keys order Cat. No. 981KEY.



CAT. NO.	KEYED	FINISH
981	Alike	Chrome

Minimum order: 1 each. All Locks can be combined for quantity pricing.
Requires 5/8" (16 mm) diameter barrel hole and 3/8" (10 mm) ferrule hole.

CRL Track Plunger Lock

- No Need to Drill a Hole in Glass

CRL Track Plunger Locks install easily on sliding glass doors in showcase track assemblies. They can be mounted in the H-Bar or within the surround frame of the glass doors. The spring-activated design permits keyless locking by simply pushing the plunger. Lock comes complete with two brass keys and trim washer. Customers needing duplicate keys can order Cat. No. LKEY which is the blank Key for this Lock. If the LK54 Lock is being used with D610, D5610 or MC610 H-Bar, the glass will require notching. If being used with LK610 H-Bar and D602 Lower Track, no glass notching is required.



CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK54	LK54KA	Nickel Plated
LK55	LK55KA	Brushed Nickel

Minimum order: 1 each. All Locks can be combined for quantity pricing.
Requires 13/16" (20 mm) diameter barrel hole and 5/16" (8 mm) plunger hole.

CRL Sliding Door Lock

- No Drilling Through H-Bar Cross Web
- 1" (25 mm) Long Plunger Fits All H-Bar Extrusions

This CRL Sliding Door Lock requires a 5/16" (8 mm) diameter hole, making it easy to install without notching the glass. Lock is secured by two screws from the back side of the H-Bar. Available in black and satin chrome finishes, keyed alike or randomly. Blank Keys are available to make duplicate keys. For blank replacement Keys cut on one side order Cat. No. BKEY; for blank replacement Keys cut on two sides order Cat. No. B2KEY.




CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0911BC	0911BCKA	Black Chrome
0911SC	0911SCKA	Satin Chrome

Minimum order: 1 each. All Locks can be combined for quantity pricing.
Requires 5/16" (8 mm) diameter plunger hole.

CRL Sliding Door Lock

- For 1/4" (6 mm) Glass Thick
- 1/2" (12 mm) Long Plunger With "L" Return
- Top Security

This Sliding Door Lock prevents spreading of glass panels to bypass the lock with the unique "L" shaped plunger. Use CRL Cat. No. AG114 to drill a 1-1/4" (32 mm) hole for installation. Includes two Keys.

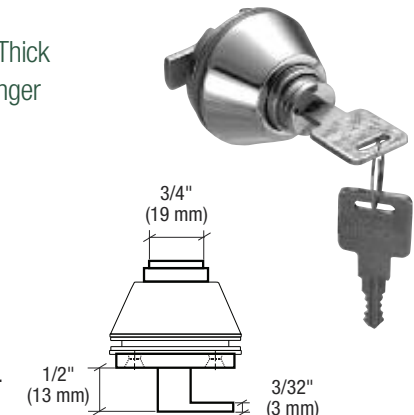

CAT. NO.	KEYED	FINISH
LK87C	Randomly	Satin Chrome

Minimum order: 1 each. All Showcase Locks can be combined for quantity pricing.
Requires 1-1/4" (32 mm) diameter hole.

CRL End Cap Sliding Door Lock for DV146 H-Bar

- No Need to Drill Glass

This Lock fits into the cut end of the DV146 H-Bar to secure the bypassing panels when also using a Cat. No. 6306 Anti-Lift Clip. No drilling of the glass is required. The Lock comes with two keys. For blank replacement Keys order Cat. No. K2KEY.




CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
0681SC	0681SCKA	Satin Chrome
0681CH	0681CHKA	Chrome

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Anti-Lift Clip for 0681 Lock

CRL's Anti-Lift Clip is designed to prevent track assembly doors from being removed when they are in the locked position. The Anti-Lift Clip is secured to the track assembly with two screws 6X58FHPMS (not included) and intended to work with CRL's Cat. No. 0681 End Cap Sliding Door Lock and D602 Lower Track Extrusion. Minimum order is one each.

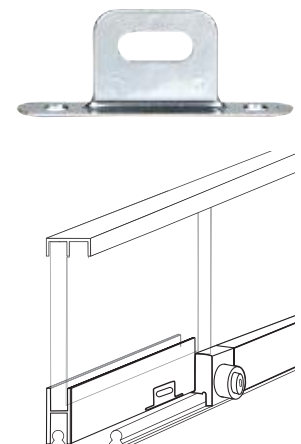

CAT. NO. 6306

CRL End Cap Sliding Door Lock for S710A Security H-Bar

- No Drilling of Glass Required
- Reversible Handing



Plunger-style Lock fits into cut end of Cat. No. S710A Security H-Bar to secure the bypassing panels. No drilling of the glass is required. Comes with two keys.

NOTE: For use only with Cat. No. S710A Security H-Bar.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
TA11	TA11KA	Satin Anodized
LKEY	LKEY	Replacement Blank Key

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Cabinet Glass Door Lock

- Doubles as a Knob to Open Doors
- Fits Doors Up to 1/4" (6 mm) Thick
- Works With Keeper at Right




The plunger can be activated without the key, so it takes only seconds to secure the bypassing doors. The Lock's design also allows it to be used as a knob to open the doors when in the unlocked position, so you don't have to install a separate pull handle. Locks come complete with two keys and washers. Customers needing extra blank Keys can order Cat. No. LKEY. Requires 1" (25 mm) diameter hole.

CAT. NO. RANDOM KEYS	CAT. NO. KEYED ALIKE	FINISH
LK50	LK50KA	Polished Chrome
LK50SA	LK50SAKA	Satin Chrome
LK50DU	LK50DUKA	Dark Bronze

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Keymatic Sliding Glass Door Plunger Lock

- Polished Nickel Finish
- Installs Directly Onto Glass Up to 1/2" (12 mm) Thick



ONLINE INSTALLATION RESOURCES



The CRL Keymatic Sliding Glass Door Plunger Lock is installed directly onto the glass with plunger resting against edge of back sliding door. A 1-1/4" (32 mm) hole must be drilled in the front sliding door to accept the Lock. Will work in doors up to 1/2" (12 mm) thick. A captive operation system allows the key to be removed only in the locked position. Package includes the glass cover plate, rubber rings, plastic insert washer, and four screws. The exclusive Keymatic Cylinder allows combination changes using the Cat. No. KMKM Keymatic Master Combination Key. Minimum order is one each.

CAT. NO. KML41GL

CRL Push Button Cabinet Glass Door Lock

NEW!

- Fits Doors Up to 1/4" (6 mm) Thick
- Doubles as a Knob to Open Doors
- Works With Keeper Below



The plunger can be activated without a key, so it takes only seconds to secure the bypassing doors. The Lock's design also allows it to be used as a knob to open the doors when in the unlocked position, so you don't have to install a separate pull handle. Requires 1" (25 mm) diameter hole.

CAT. NO.	FINISH
LK49	Polished Chrome
LK49SA	Satin Chrome
LK49DU	Dark Bronze

Minimum order: 1 each. All Locks can be combined for quantity pricing.

CRL Glass Door Lock Keeper

NEW!

- Works With LK49 and LK50 Series Locks
- Doubles as a Knob to Open Doors
- Fits Doors Up to 1/4" (6 mm) Thick



This CRL Glass Door Lock Keeper gets mounted either on the fixed glass sidelite or one of the glass bypassing doors, to receive the plunger from lock Series LK50 or LK49. The Keeper requires a 1" (25 mm) diameter hole in glass for installation. When unlocked, the Keeper will double as a knob to open bypassing doors.

CAT. NO.	FINISH
LK51	Polished Chrome
LK51SA	Satin Chrome
LK51DU	Dark Bronze

Minimum order: 1 each. All Keepers can be combined for quantity pricing.

CRL Keymatic Sliding Door Plunger Lock

- Fits Non-glass Doors Up to 1-1/32" (26 mm) Thick

The CRL Keymatic Sliding Door Plunger Lock can be installed to engage either by pushing into a 7/8" (22 mm) drilled hole, or resting against the edge of the back sliding door. This Lock is excellent for any sliding door application other than glass doors, for which we have the Cat. No. KML41GL Sliding Glass Door Plunger Lock (see left). Lock features captive operation so key can only be removed in locked position. Fits non-glass doors up to 1-1/32" (26 mm) thick. The exclusive Keymatic Cylinder allows combination changes using the Cat. No. KMKM Keymatic Master Combination Key.



CAT. NO.	DESCRIPTION	FINISH
KML41	Plunger Lock	Polished Nickel

Minimum order: 1 each. All Locks can be combined for quantity pricing.