
AUTOMATIC FLUSH BOLTS

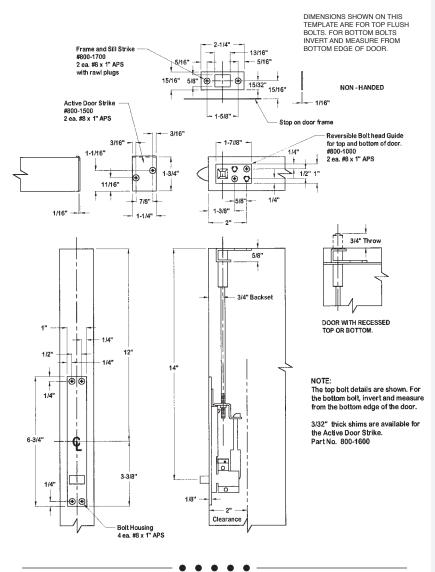

No. 840—Non-Handed Single Bolt

No. 840—Top Bolt Only x 8BFB (Bottom Fire Bolt—pg. C-6)

No. 842-Set of 840 Bolts

Conforms to ANSI/BHMA 156.3, Type 25

Fully Automatic: Opening active door automatically retracts top and bottom bolts. Closing active door automatically extends both top and bottom bolts 3/4" into frame and sill strikes, locking inactive door. (Dust proof strike optional.)

Non-Handed: No. 842 Automatic Flush Bolts are non-handed. It is not necessary to reverse either top or bottom bolt.

Adjustable Bolt Head Rods: Bolts can be vertically adjusted 1-1/2" for unusual floor or frame conditions.

Low Closing Force: Patented free floating cams require a maximum of 5 lbs. closing force on active door to extend both top and bottom bolts.

Override Feature: Prevents damage to doors or bolts should bolt heads be prevented from entering top or bottom strike.

Stock Finishes: Trim Pak (bolt cover plates, screws & strikes) US Standard: US3, US4, US10, US10B, US26, US26D, US32, US32D BHMA Standard: 605, 606, 612, 613, 625, 626, 629, 630.

