




WALL STOPS & HOLDERS

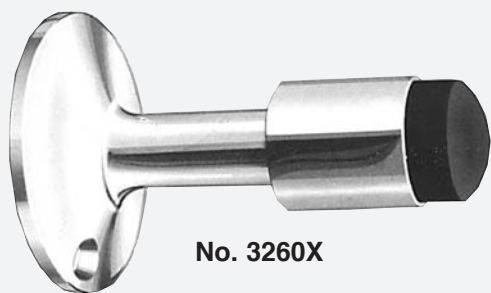


No. 3260X

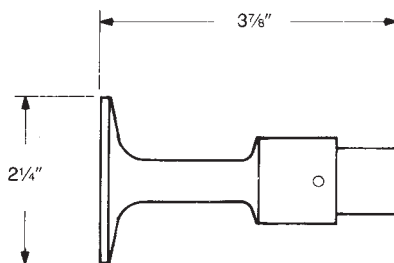

No. 3260X—Conforms to ANSI/BHMA 156.16. Solid cast brass or bronze. Heavy duty wall stop with 3 7/8" long projection.

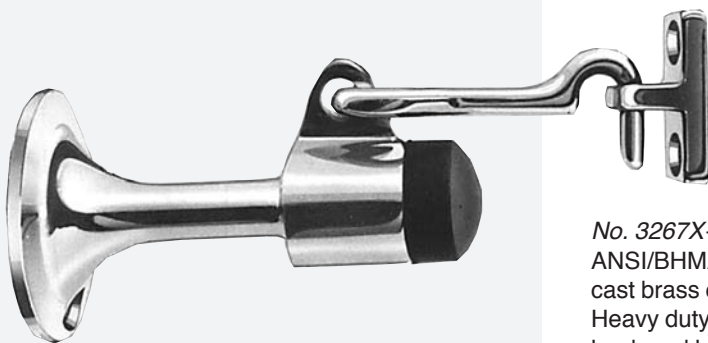


No. 3267X

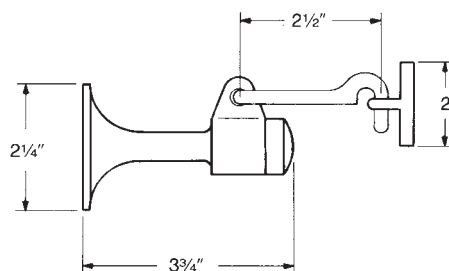


No. 3267X—Conforms to ANSI/BHMA 156.16. Solid cast brass or bronze. Heavy duty wall stop with hook and holder.

Finishes: US Standard: US3, US4, US10, US10B, US26, US26D
BHMA Standard: 605, 606, 612, 613, 625, 626

Suffix X Fasteners: 1 ea. 5/16" X 2" lag screw; 1 ea. 5/16" X 2" machine stud and tamping; and 1 ea. No. 12 X 1 1/4" SMS X No. 12 plastic anchor.

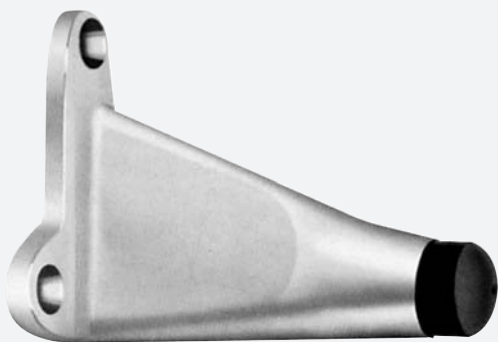

No. 3252T

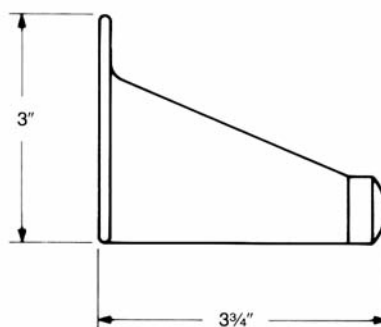

No. 3252—Conforms to ANSI/BHMA 156.16. Solid cast brass or bronze with replaceable phenolic bumpers. Recommended max. door weight, 180 lbs. Solid wall mounting.

3252T—26D

Fasteners—drywall, wood, masonry

- 3 each 1/4" x 1-1/2" FHMS
- 3 each poly toggle
- 3 each No. 12 x 1-1/4" FHMS
- 3 each expansion shield

