





No. 3467X—Conforms to ANSI/BHMA 156.16, L11301. Easy operation with a push and pull on the door for open and release. Durable die cast brass construction for heavy traffic areas. The holder is mounted on the door, and the strike on the floor. Designed to accommodate a wide range of door to floor clearances. Supplied with a universal screw package for all types of applications.

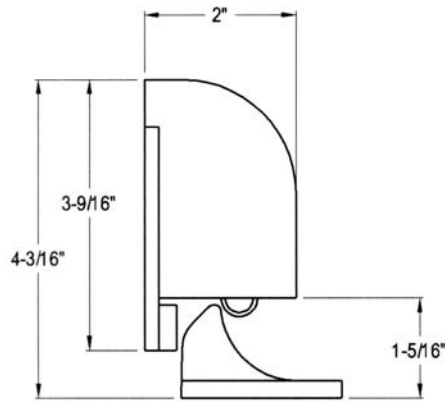

No. 3467X

ITEM NO.	DOOR TO FLOOR CLEARANCE	FINISH
3467X	1/2" or Less	US3, 4, 10, 10B, 26, 26D
3468X	9/16" to 1-1/16"	US3, 4, 10, 10B, 26, 26D
3469X	1-1/8" to 1-9/16"	US3, 4, 10, 10B, 26, 26D
3470X	1-5/8" to 2-1/16"	US3, 4, 10, 10B, 26, 26D

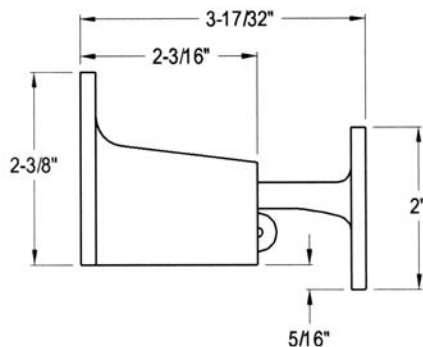

No. 3487X—Conforms to ANSI/BHMA 156.16, L11291. Easy operation with a push and pull on the door for hold open and release. Durable die cast brass construction for heavy traffic areas. The holder is mounted on the wall and the strike is mounted on the door, with a projection of 3 1/2". Supplied with a universal screw package for all types of applications.



No. 3487X