


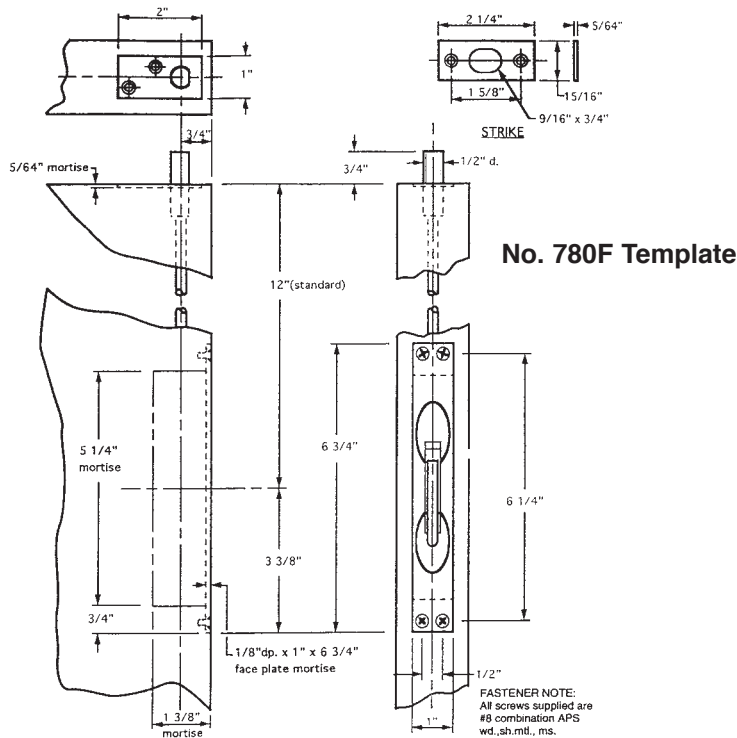

No. 780F Template

Solid Brass or Bronze Material
Top Strike Std. ANSI A115.4
Top Frame Operation

No. 780F—Rod lengths available.
All rods have 1/2" adjustment for
door and strike clearance.

Conforms to ANSI/BHMA 156.16,
BHMA L14251

Stock Finishes: US Standard:
US3, US4, US10, US10B, US26,
US26D
BHMA Standard: 605, 606, 612,
613, 625, 626

FASTENER NOTE:
All screws supplied are
#8 combination APS
wd, sh, mtl., ms.


**Up to 8' x 10' Metal Door Pairs
3 Hour Fire Rating**



No. 780 F



No. R13354

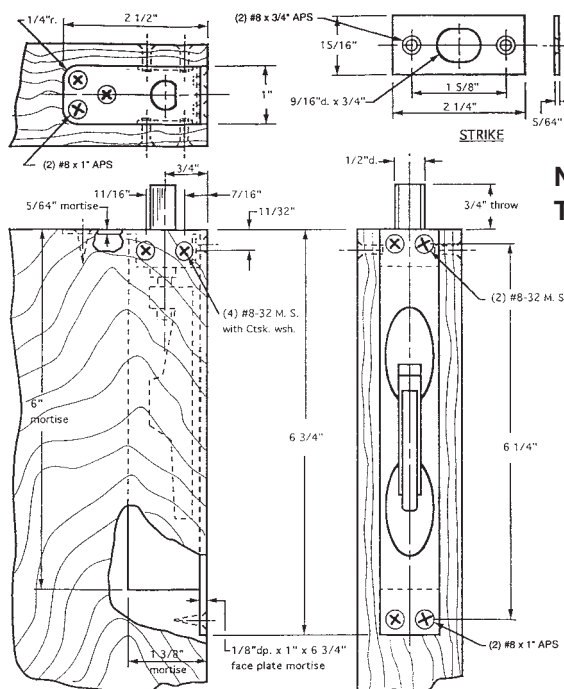

**No. 790F
Template**

Solid Brass or Bronze Material
Top Strike Std. ANSI A115.4

Conforms to ANSI/BHMA 156.16,
BHMA L14261

Stock Finishes: US Standard:
US3, US4, US10, US10B, US26,
US26D
BHMA Standard: 605, 606, 612,
613, 625, 626

**Up to 8' x 10' Wood Door Pairs
1-1/2 Hour Fire Rating**



No. 790 F

