

BOTTOM FIRE BOLT

3-Hour Fire Rating—Metal Doors


Automatic



Self-Latching



8BFB & 9BFB Bottom Fire Bolt

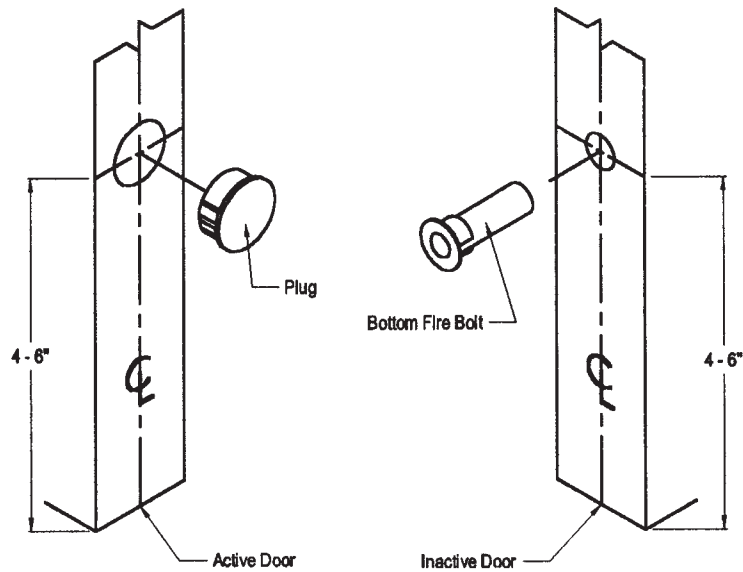

20 Minutes Fire Rating—Wood Doors

Automatic



Self-Latching



The 805, 840, 905, 940, and 960 Automatic and Self Latching Top Flush Bolts are UL Listed for pairs of fire doors when specified with the 8BFB or 9BFB Bottom Fire Bolt.

No. 8BFB and 9BFB—Bottom Fire Bolts eliminate the bottom automatic flush bolt and dust proof strike. The BFB is installed horizontally in the inactive door, with a mating hole in the edge of the active door. When subjected to 230°F the BFB projects a bolt, locking the leaves together.

Ordering Information:

Metal Doors

840-Finish/8BFB	840 Single Automatic Flush Bolt x Bottom Fire Bolt
805-Finish/8BFB	805 Single Self-Latching x Bottom Fire Bolt
8BFB	Bottom Fire Bolt Only
CPK-840-Finish	Cover Plate Kit for existing bottom 840 prep

Wood Doors

940-Finish/9BFB	940 Single Automatic Flush Bolt x Bottom Fire Bolt
960-Finish/9BFB	960 Single Automatic Flush Bolt x Bottom Fire Bolt
905-Finish/9BFB	905 Single Self-Latching x Bottom Fire Bolt
9BFB	Bottom Fire Bolt Only

Stock Finishes:

805, 840, 905, 940, 960, & CPK-840
US Standard: US3, 4, 10, 10B, 26, 26D, 32, 32D
ANSI/BHMA: 605, 606, 610, 613, 625, 626, 629, 630

8BFB & 9BFB
US32D, ANSI/BHMA: 630



Packaging: Individually bagged, and packaged with the automatic flush bolt.

