

Item No. 805, 845, 805/8BFB

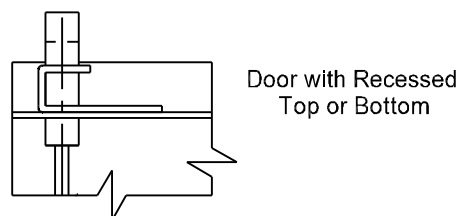


Diagram illustrating the exploded view of the door locking mechanism, showing components for the Active Door and Inactive Door.

Active Door Components:


- 9/16" [14.3] Diameter Hole
- 1-3/32" [27.8] Diameter Hole
- Spring Steel Locking Collar
- 8BFB
- 31/64" [12.3] Dia. x 1-9/16" [39.7] Long
25/32" [19.8] Dia. Face x 1/32" [.8] Thick
- Plug
- 1-5/64" [27.4] Dia. x 3/8" [9.5] Long
1-15/64" [31.4] Dia. Face x 1/32" [.8] Thick
- Active Door

Inactive Door Components:

- 9/16" [14.3] Diameter Hole
- 1-3/32" [27.8] Diameter Hole
- Spring Steel Locking Collar
- 8BFB
- 31/64" [12.3] Dia. x 1-9/16" [39.7] Long
25/32" [19.8] Dia. Face x 1/32" [.8] Thick
- Plug
- 1-5/64" [27.4] Dia. x 3/8" [9.5] Long
1-15/64" [31.4] Dia. Face x 1/32" [.8] Thick
- Inactive Door

Dimensions:

- 4"-6" [101.6-152.4]
- 4"-6" [101.6-152.4]

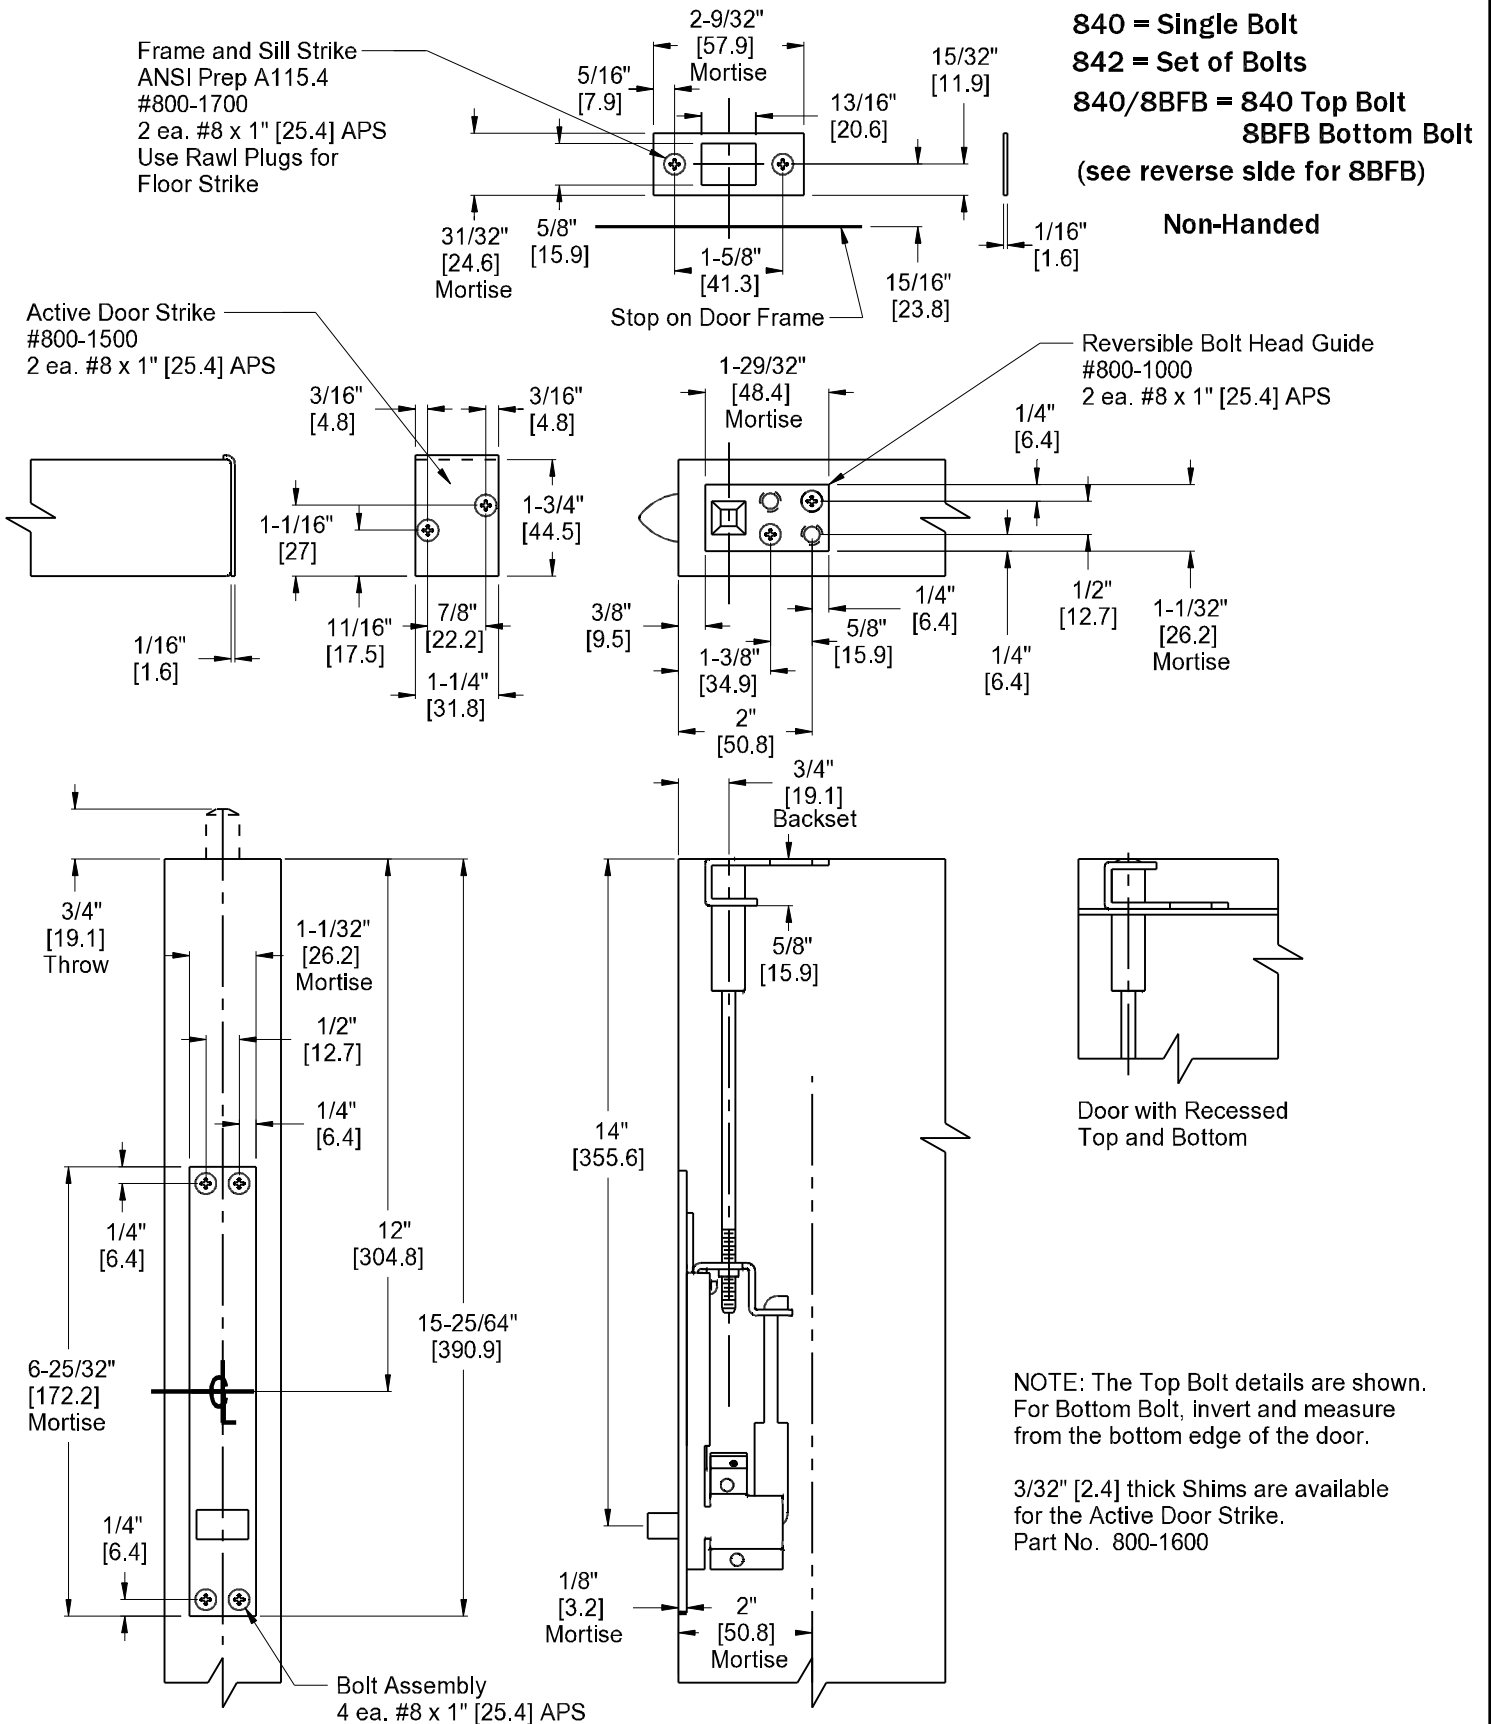

Dimensions in [] denotes millimeters



DOOR CONTROLS INTERNATIONAL
 2362 Bishop Circle East
 Dexter, MI 48130 U.S.A.