



Exit Alarm (EA)

The Exit Alarm (EA) device option is designed for areas that require a stand-alone alarm on an emergency exit door. The alarm will sound when someone attempts to exit a door by depressing the pushpad, alerting management that violation has occurred. The internal alarm with remote signal and remote bypass capabilities is ideal for doors where both security and life safety are a concern.



10 Series Rim Exit Device shown

Shown with Factory Installed Mortise Cylinder - Sold Separately

Available with 10/40 Rim, 30 Mortise, 20/21/50/51 Surface Vertical Rod Devices and 60/61/62/63/70/71/80/81/82/83 Concealed Vertical Rod Devices

Benefits

- | | | |
|--|---|--|
| • Controls foot traffic, deters unauthorized exits, prevents loss and meets building code requirements | • Reduces employee and customer theft | • Fast and easy installation saves time and money |
| | • One cylinder provides arming, disarming and dogging | • Durable electronics provide years of trouble-free service, saving on replacement costs |

Features

- | | | |
|---|--|---|
| • Powered by standard 9-volt battery or 12V or 24V AC/DC power with 9-volt battery backup | • Arming delay - Factory default is 15 second delay after key reset. 1 second or 5 second delays also available. Call factory | • Mortise cylinder key switch arming |
| • 100dB alarm | • Manual/Auto Rearming - Factory default is field-selectable for manual key arming or 2 minute auto rearm. 10 minute and 20 minute auto rearm also available. Call Factory | • Through-wire hinge or power transfer compatible |
| • State-of-the-art electronics offer reliable security and instantaneous alarm | | • Low Battery Alert (Audible/Visual) |
| | | • Visual and audible arming indicators |

Mechanical Options


- | | | |
|--|--|--|
| • CD - Cylinder Dogging | • FC3EC1 - Flexible 3' Conduit Kit, includes EC1 ramped end cap (specify finish) | • PT5 - Concealed mortise mount power transfer |
| • LD - Less Dogging | • FC3EC2 - Flexible 3' Conduit Kit, includes EC2 flush end cap (specify finish) | • EH8 - Five-knuckle energy transfer hinge - 8 wires |
| • SLR - Silencer | • FC10EC1 - Flexible 10' Conduit Kit, includes EC1 ramped end cap (specify finish) | |
| • KS - Key Stop (Key removed only when armed) | • FC10EC2 - Flexible 10' Conduit Kit, includes EC2 flush end cap (specify finish) | |
| • Add to existing 10/20/21/30/40/50/51 device by adding EA slide-in filler (specify finish and door width) | | |

For full list of available mechanical options, see individual device how to order page

Accessories

- MC65 - Factory Installed Mortise Cylinder

- Optional Cylinder Nut Wrench
P/N: 103779




- PP-5152-3 - 12 VAC Transformer
- PP-5152-2 - 24 VAC Transformer


Device Finishes

605 / US3	Polished Brass	628 / US28	Aluminum Satin	693 / SPBLK	Black, Painted
606 / US4	Brushed Brass	629 / US32	Polished Stainless Steel	695 / SP 313	Dark Bronze, Painted
611 / US9	Polished Bronze				
612 / US10	Brushed Bronze	630 / US32D	Brushed Stainless Steel		
613 / US10B	Oil Rubbed Bronze				

Riser Diagram

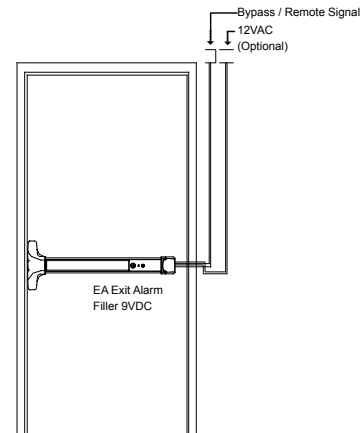

Power Connections

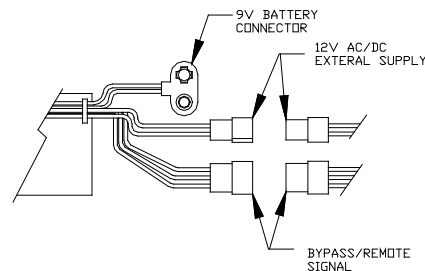

Listings and Approvals

See individual device (i.e. 10 Series) catalog page for fire and panic listings and windstorm ratings/approvals

Detex Limited Warranty

10 Year Mechanical/3 Year Electrical
Limited Manufacturer's Warranty

DETEx[®]
A Century of Security
1923-2023

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA
PH. (830) 629-2900
(800) 729-3839
FAX (800) 653-3839
<http://www.detex.com>
USA Sales:
marketing@detex.com
International Sales:
export@detex.com



Cancer & Reproductive Harm - www.detex.com/prop65