


ELECTRIFIED INTERMEDIATE PIVOT

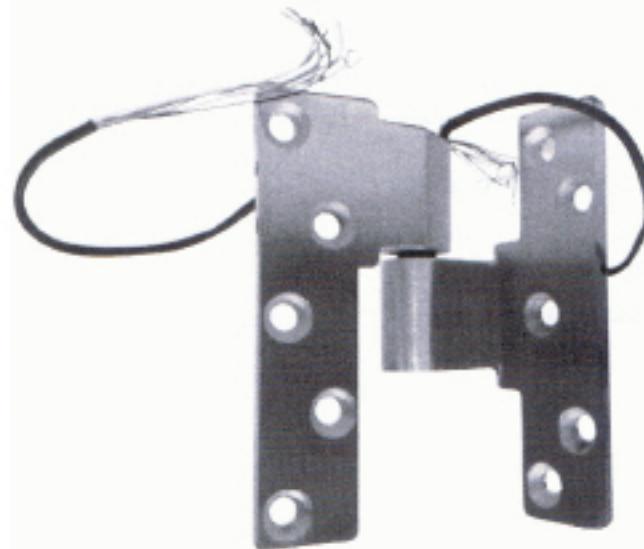

E8WIP-34-LHR
E8WIP-34-RHR

NUMBER	SIZE	OFFSET	THICKNESS	ANSI	MATERIAL
E8WIP-34-LHR	5" x 4 1/4"	3/4"	5/16"	CO7321	Non-Ferrous
E8WIP-34-RHR	5" x 4 1/4"	3/4"	5/16"	CO7321	Non-Ferrous

*For medium and heavy wood and metal doors in high traffic areas

Features:

- 8, 28 gauge wires
- Can be used on exterior and interior doors
- Can be used w/ top and bottom pivots
- Units are handed
- Not load bearing
- Maintains door alignment and aids in installing bottom pivots
- Doors 60" to 90" in height should use one intermediate pivot. Each additional 30" warrants another intermediate pivot.
- Vertical adjustment up to 3/16"

Shelf pack: 1 per box w/ screws

Fasteners:
8 ea Wood Screws
8 ea Machine Screws

Finishes: 605, 606, 612, 613, 626