


No. 5 Equipment



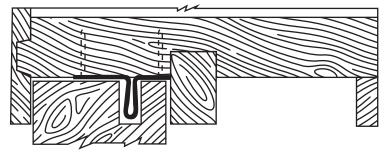



Head Section



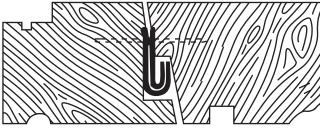



Meeting Rail



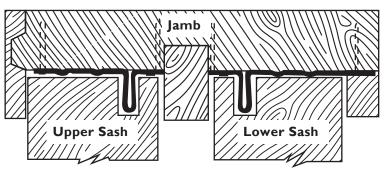

Jamb Section



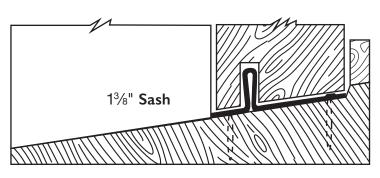

Sill Section

Zinc Heads & Sills—Plain

 $\frac{1}{8}$ " rib x $\frac{7}{16}$ " high $\frac{3}{8}$ " flange (.018)

2P I" wide

4P 13/8" wide

7P 13/4" wide

9P 2" wide

Zinc Meeting Rails

MIZ (.024) large hook M2Z (.018) small hook

Alternate Zinc Meeting Rails

M3Z (.018) hemmed hook M4Z (.018) double flat

Zinc

Upper & Lower Sides—Corrugated 1/8" rib x 7/16" high 3/8" flange (.018)

4C 13/8" wide

7C 1³/₄" wide 9C 2" wide

10C 21/4" wide

IIC 2½" wide

Available in Solid Bronze

Recommended Equipment in Zinc by Sash Thickness

13/8" Sash Thickness

Head—2P Upper Side—4C Meeting Rails—M1M2 Lower Side—7C Sill—4P

1¾" Sash Thickness

Head—2P Upper Side—7C Meeting Rails—M1M2 Lower Side—9C Sill—7P

2" Sash Thickness

Head—4P Upper Side—9C Meeting Rails—M1M2 Lower Side—10C Sill—9P

21/4" Sash Thickness

Head—4P Upper Side—10C Meeting Rails—M1M2 Lower Side—11C Sill—10P