



TESTED TO NAFS

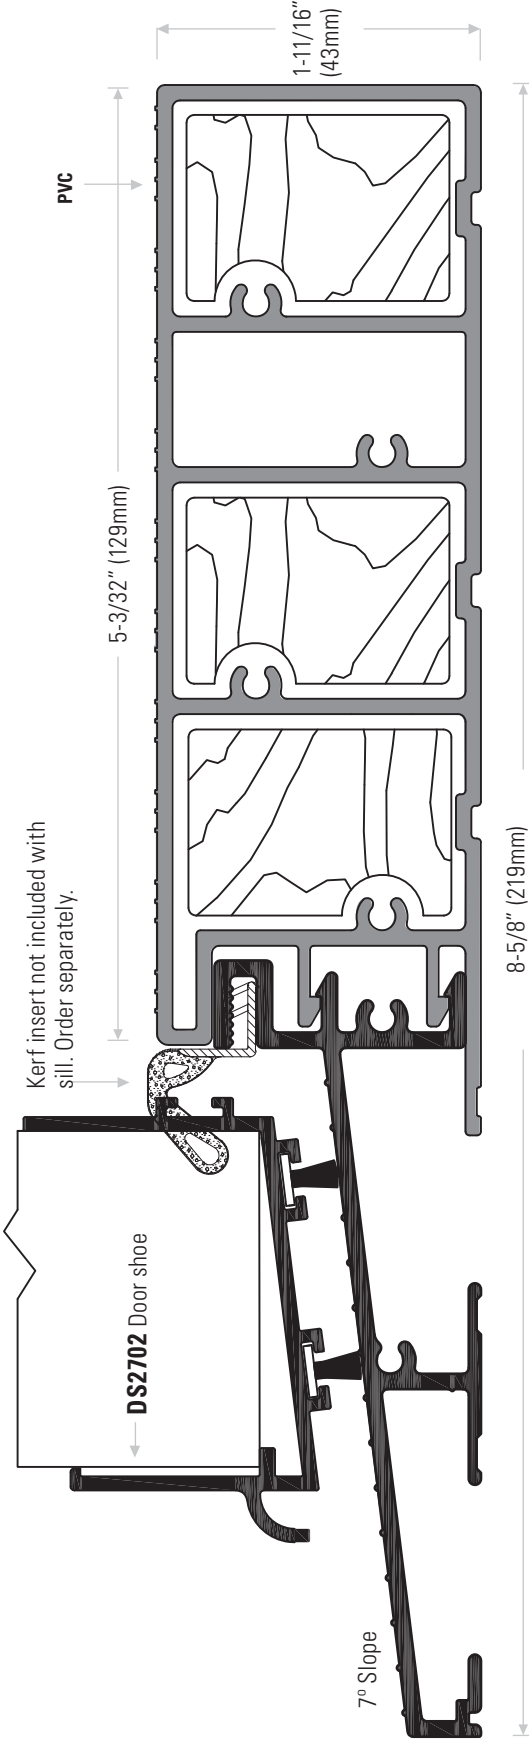


DS2858AVT150 Extruded aluminum sill mill finish with PVC interior threshold, **tan** & 3 wood inserts. 150" (3810mm) length.
DS2858AVBL150 Extruded aluminum sill mill finish with PVC interior threshold, **black** & 1 wood insert. 150" (3810mm) length.
DS2858DVB150 Extruded aluminum sill, **bronze** anodized with PVC interior threshold, **black** & 3 wood inserts. 150" (3810mm) length.

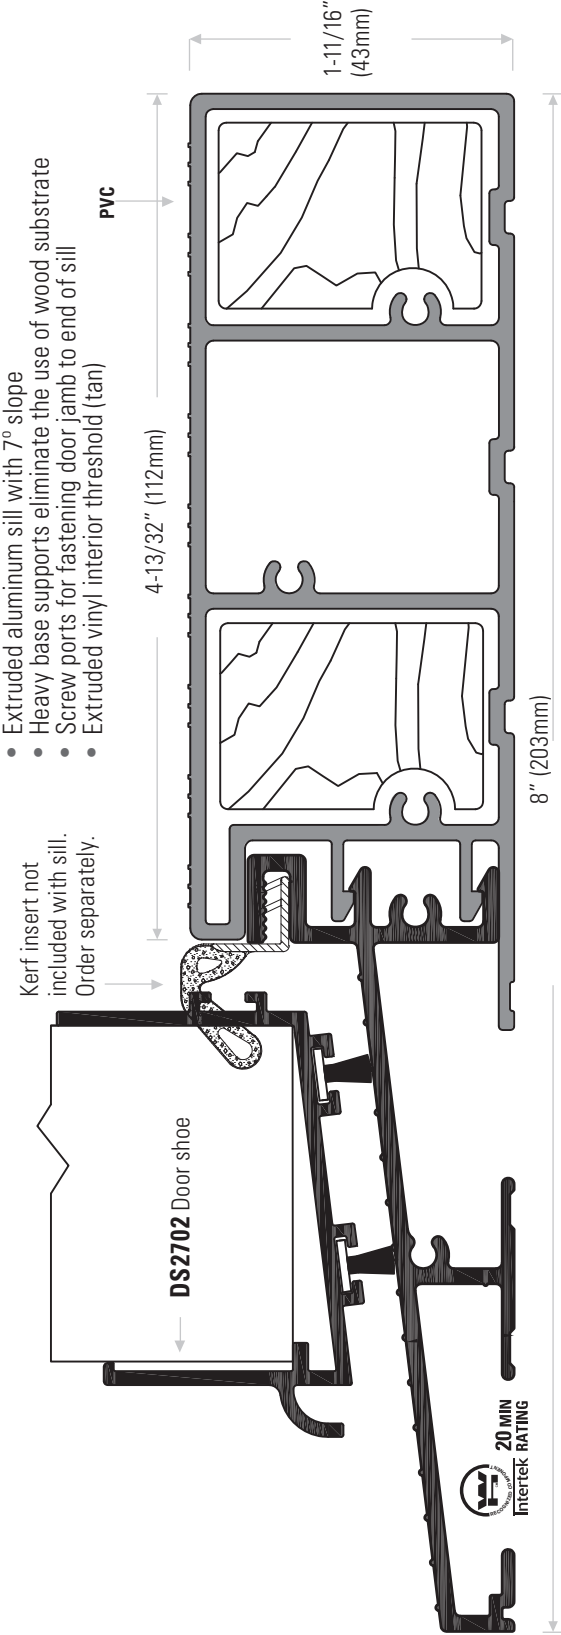



DS2758AVT150 Extruded aluminum sill mill finish with PVC interior threshold, **tan** & 2 wood inserts. 150" (3810mm) length.
DS2758AVBL150 Extruded aluminum sill mill finish with PVC interior threshold, **black** & 1 wood insert. 150" (3810mm) length.
DS2758DVB150 Extruded aluminum sill, **bronze** anodized with PVC interior threshold, **black** & 2 wood inserts. 150" (3810mm) length.

OUTSWING SILL, MILLENNIUM SERIES, PRE-HUNG DOOR APPLICATION

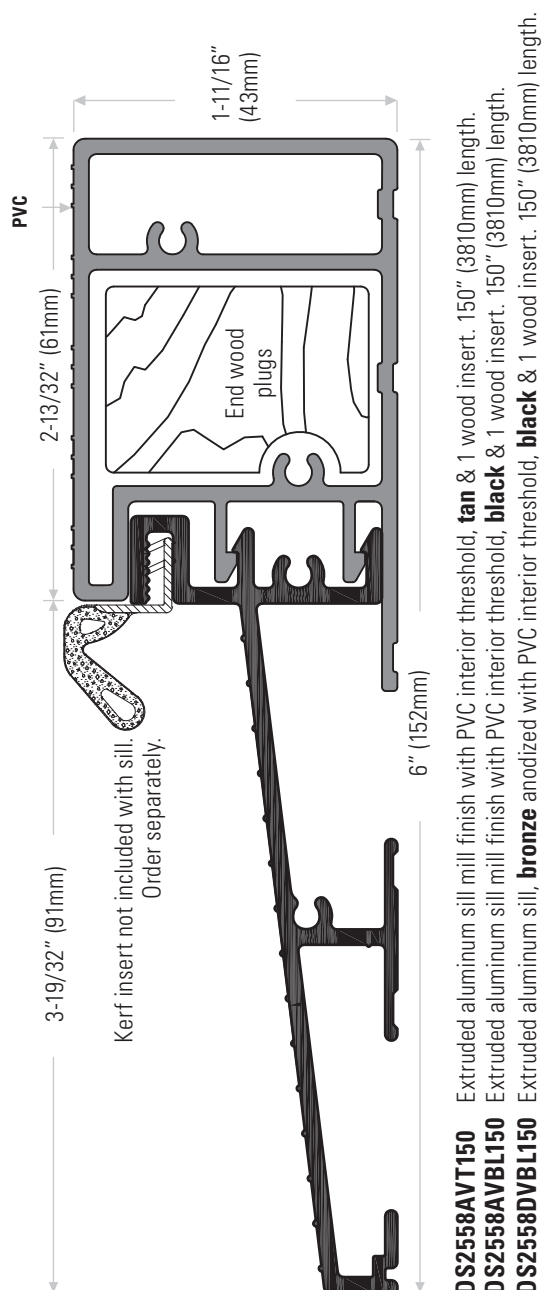

Outswing Sill (DS2758AVT) Tested with DS347N / DS181 Series (Thermally Broken) Astragal



TESTED TO NAFS

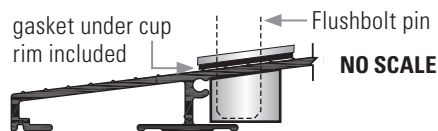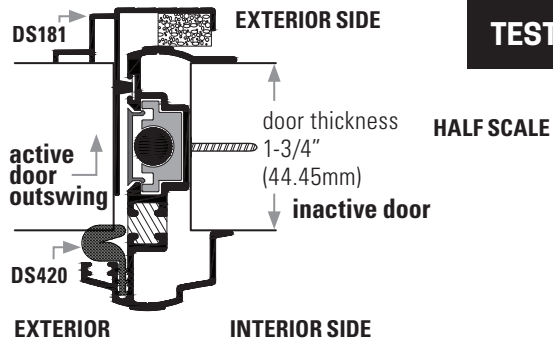

DS2636 Flushbolt cup for DS2858, DS2758, DS2558

DS2637 Gasket for DS2636 cup, fits under rim

Sills DS2858, DS2758, DS2558 require notching (by prehanger) for the DS420 continuous cornering weatherseal

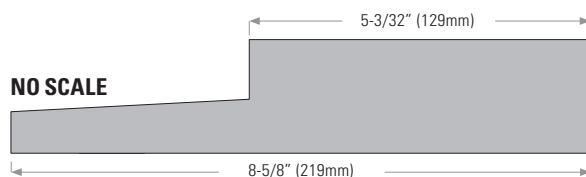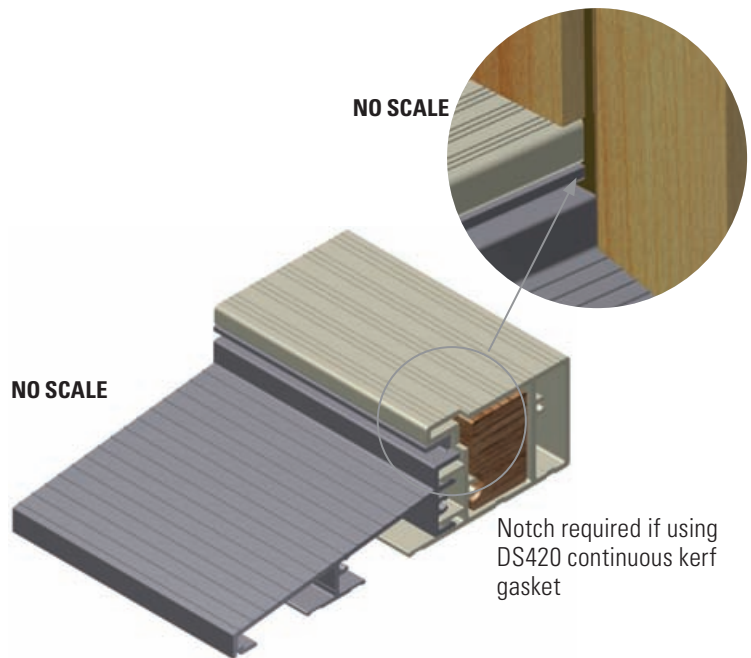

DS2858GASKET

Sill to jamb gasket, adhesive both sides. Peel tape off both sides of gasket before assembly. Gasket may be trimmed to fit all sills on this page. Use with DS2558, DS2758, DS2858AVT, DS2578, DS2778 & DS28580AK.